

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 334 359 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 89105252.4

(51) Int. Cl.<sup>5</sup>: **D07B 5/00**, B65H 59/02,  
G02B 6/44, H02G 1/08,  
B65H 51/16

(22) Date of filing: 23.03.89

(30) Priority: 25.03.88 JP 69752/88  
25.03.88 JP 69753/88  
25.03.88 JP 69754/88  
31.03.88 JP 76486/88  
23.01.89 JP 11837/89  
09.02.89 JP 28704/89

(43) Date of publication of application:  
27.09.89 Bulletin 89/39

(84) Designated Contracting States:  
DE FR GB IT NL

(88) Date of deferred publication of the search report:  
21.08.91 Bulletin 91/34

(71) Applicant: Nippon Steel Welding Products &  
Engineering Co., Ltd.  
5-4, 3-chome, Tsukiji Chuo-ku  
Tokyo(JP)

(72) Inventor: Araki, Nobuo c/o Nippon Steel  
Welding Products

& Engineering Co., Ltd. 5-4, Tsukiji 3-chome  
Chuo-ku Tokyo(JP)

Inventor: Tabata, Kazufumi c/o Nippon Steel  
Welding Products

& Engineering Co., Ltd. 5-4, Tsukiji 3-chome  
Chuo-ku Tokyo(JP)

Inventor: Yokoi, Kiyomi c/o Nippon Steel  
Welding Products

& Engineering Co., Ltd. 5-4, Tsukiji 3-chome  
Chuo-ku Tokyo(JP)

Inventor: Ashidate, Tadami c/o Nippon Steel  
Welding Products

& Engineering Co., Ltd. 5-4, Tsukiji 3-chome  
Chuo-ku Tokyo(JP)

Inventor: Hattori, Osamu c/o Nippon Steel  
Welding Products


& Engineering Co., Ltd. 5-4, Tsukiji 3-chome  
Chuo-ku Tokyo(JP)

(74) Representative: Vossius & Partner  
Siebertstrasse 4 P.O. Box 86 07 67  
W-8000 München 86(DE)

(54) Method and apparatus for passing threadlike pieces through tubular products.

(57) A coil of a tube is formed. The coil is vibrated while a threadlike piece is passed in through the inlet end of the tube so that a given point of the tube reciprocates along a helical path. Provision is made to ensure that inlet end of the tube does not cause a portion of the threadlike piece upstream of and close to that inlet end to move diametrically while being fed into the tube. Provision is also made to form a coil of the threadlike piece, from which the threadlike piece is pull out along the axis of the coil and fed to the inlet end of the tube by conveying force resulting from the vibration of the coil of the tube. A feeder to supply the threadlike piece into the tube may be provided between the inlet end of the tube and a coil feeding device.

FIG. 1

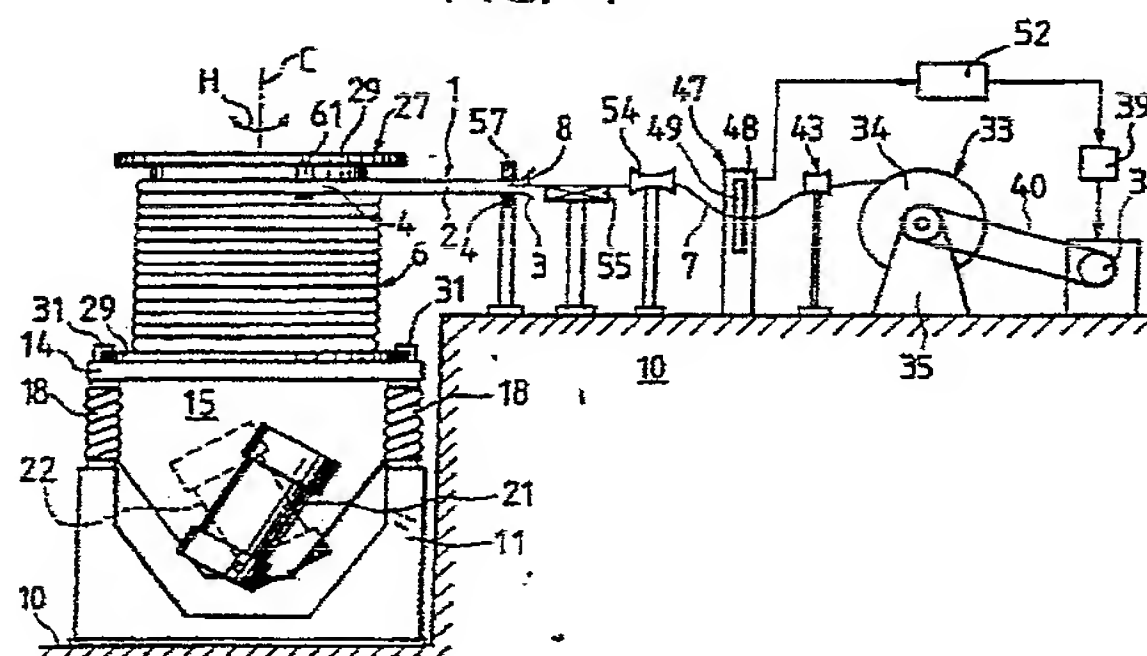



European  
Patent Office

## EUROPEAN SEARCH REPORT

Application Number

EP 89 10 5252

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
D,A	EP-A-0 091 717 (N.V. PHILIPS) * Page 18, line 34 - page 20, line 32; claims 1,20; figures 2,3 *	1,12,20, 26,41,46, 60-64	D 07 B 5/00 B 65 H 59/02 G 02 B 6/44 H 02 G 1/08 B 65 H 51/16
A	EP-A-0 152 720 (PLUMETTAZ S.A.) * Abstract; page 6, lines 8-27; figures 1,2 * -----	1,7,12,14, 20,22,23, 26,30,37, 46,53,57	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			G 02 B 6/44 H 02 G 1/08 D 07 B 7/14 B 65 H 51/16
The present search report has been drawn up for all claims			
Place of search		Date of completion of search	Examiner
The Hague		22 May 91	LIPP G.
<b>CATEGORY OF CITED DOCUMENTS</b> X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons ----- &: member of the same patent family, corresponding document			

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11) Publication number:

**0 334 359**  
**A2**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: 89105252.4

(51) Int. Cl.4: **D07B 5/00** , **B65H 59/02** ,  
**G02B 6/44**

(22) Date of filing: 23.03.89

(30) Priority: 25.03.88 JP 69752/88  
25.03.88 JP 69753/88  
25.03.88 JP 69754/88  
31.03.88 JP 76486/88  
23.01.89 JP 11837/89  
09.02.89 JP 28704/89

(43) Date of publication of application:  
27.09.89 Bulletin 89/39

(84) Designated Contracting States:  
DE FR GB IT NL

(71) Applicant: Nippon Steel Welding Products & Engineering Co., Ltd.  
5-4, 3-chome, Tsukiji Chuo-ku  
Tokyo(JP)

(72) Inventor: Araki, Nobuo c/o Nippon Steel Welding Products & Engineering Co., Ltd. 5-4, Tsukiji 3-chome Chuo-ku Tokyo(JP)  
Inventor: Tabata, Kazufumi c/o Nippon Steel Welding Products & Engineering Co., Ltd. 5-4, Tsukiji 3-chome Chuo-ku Tokyo(JP)  
Inventor: Yokoi, Kiyomi c/o Nippon Steel Welding Products & Engineering Co., Ltd. 5-4, Tsukiji 3-chome Chuo-ku Tokyo(JP)  
Inventor: Ashidate, Tadami c/o Nippon Steel Welding Products & Engineering Co., Ltd. 5-4, Tsukiji 3-chome Chuo-ku Tokyo(JP)  
Inventor: Hattori, Osamu c/o Nippon Steel Welding Products & Engineering Co., Ltd. 5-4, Tsukiji 3-chome Chuo-ku Tokyo(JP)

(74) Representative: Vossius & Partner  
Siebertstrasse 4 P.O. Box 86 07 67  
D-8000 München 86(DE)

**EP 0 334 359 A2**

(54) Method and apparatus for passing threadlike pieces through tubular products.

(57) A coil of a tube is formed. The coil is vibrated while a threadlike piece is passed in through the inlet end of the tube so that a given point of the tube reciprocates along a helical path. Provision is made to ensure that inlet end of the tube does not cause a portion of the threadlike piece upstream of and close to that inlet end to move diametrically while being fed into the tube. Provision is also made to form a coil of the threadlike piece, from which the threadlike

piece is pull out along the axis of the coil and fed to the inlet end of the tube by conveying force resulting from the vibration of the coil of the tube. A feeder to supply the threadlike piece into the tube may be provided between the inlet end of the tube and a coil feeding device.





## METHOD AND APPARATUS FOR PASSING THREADLIKE PIECES THROUGH TUBULAR PRODUCTS

This invention relates to a method and apparatus for passing threadlike pieces through tubular products, and more particularly to a method and apparatus for passing threadlike pieces through tubular products by vibration.

The method and apparatus of this invention is used for making optical fiber cables, electric cables, composite conduits and the like comprising optical fibers, metal wires and other threadlike pieces passed through protective tubes or sheaths.

Threadlike pieces are often passed through long tubular products. Optical fiber cables recently coming into extensive use, for example, are often metal-covered to make up for the insufficient strength of optical fibers. In such instances, core wires or cords of optical fibers are passed through tubes not more than a few millimeters in diameter and over several hundred meters in length. Sometimes, a messenger wire of steel or other metal is passed before a core wire or cord is passed.

Typical conventional methods of making such products comprising threadlike pieces passed through metal and other tubes are disclosed in EPC Patent No. 91717 and Japanese Provisional Patent Publication No. 44010 of 1987. In these methods, carrier members or tubes (hereinafter generically called tubes) through which threadlike pieces are passed are vibrated. A threadlike piece is passed through a tube by means of the carrying force imparted thereto on the "vibrating conveyor". When a tube is as long as, for example, over tens of meters, the tube is coiled for ease of handling, and a threadlike piece is passed through the coiled tube.

A threadlike piece passed through a long tube according to such conventional methods often stops halfway. The threadlike piece once stopped remains at a standstill even if the vibration of the tube continues. On the occurrence of such a blockage, the entire length of the inserted threadlike piece or a considerably large portion thereof has had to be pulled out of the tube for starting the job all over again. As such, conventional methods of passing threadlike pieces through long tubes have been inefficient and time-consuming. The following is the cause for the halfway stopping of a threadlike piece in a tube the inventors have found.

In the conventional methods, the inlet end of a tube vibrates integrally with a coil. The vibrating inlet end coming in contact with a threadlike piece exerts a force thereon that works in the direction of the diameter of the tube. Therefore, a portion of the threadlike piece upstream of and close to the inlet end of the tube moves vigorously in that direction. As a consequence, a centrifugal force flicks the

portion of the threadlike piece near the inlet end out of the tube, thereby obstructing the further advance of the threadlike piece into the tube. Also, the rapid diametrical motion of the inlet end causes the same portion to remain ahead of the inlet end, thereby discharging the threadlike piece in the tube. Furthermore, the vibration repeatedly bends and damages the threadlike piece near the inlet end of the tube. Microcracks are a typical damage to optical fibers, in particular. The vibration-induced contact with the inlet end of the tube can produce an abrasion on the surface of the threadlike piece.

Usually, a threadlike piece paid off from a spool or bobbin is fed to a tube into which the piece is to be passed. If the pay-off (or the feed) of the threadlike piece from the spool etc. lags, for some reason, behind the travel forward by vibration, the threadlike piece is pulled backward, no longer advancing into the tube.

A threadlike piece winds forwards with undulating motion through a tube. The advance of the forward end of the threadlike piece lags behind that of the following portion or stops when the forward end trips against irregularities on the inner surface of the tube or foreign matters therein, or when it is subjected to a backward force from near the top surface of the inner wall. Pushed by the following portion, the forward end of the threadlike piece on such occasions suddenly makes heavy undulations. Consequently, peaks of such undulations in the forward end of the threadlike piece strike hard against the inner wall of the tube, offering as much resistance as is enough to suddenly disable the passing of the threadlike piece therethrough.

The halfway stalling of a threadlike piece in a tube is due to either each or a combination of the three causes just described.

### Summary of the Invention

The object of this invention is to provide a method and apparatus for efficiently passing a threadlike piece through a tube without damaging the threadlike piece.

A method of passing a threadlike piece through a tube according to this invention comprises forming a coil of tube and vibrating the coil of tube while feeding a threadlike piece from an inlet end of the tube so that a given point of the tube reciprocates along a helical path. The threadlike piece is fed in such a manner that the inlet end of the tube does not impart a diametrical motion to a portion of the threadlike piece upstream of and close to the

ilet end.

The threadlike piece may instead be pulled out and fed from a coil thereof along the axis of the coil by use of a carrying force resulting from vibration that works on the threadlike piece in a tube. Also, the feed rate of the threadlike piece may be adjusted at a point upstream of the inlet end of the tube so that the feed rate of the threadlike piece determines the passing rate thereof.

A coil of tube is made by winding a tube around a cylindrical core such as a bobbin or a spool. A tube may instead be formed into a coreless coil. To facilitate passing and avoid the imposition of excessive bending stress of the threadlike piece, a coil of tube should preferably have a diameter of not smaller than 150 mm.

A threadlike piece is fed from a spool on which the thread is wound, or a bobbin at a standstill, or a container holding a coil thereof. The spool may be rotated to permit a positive feed of a threadlike piece therefrom at a speed equivalent to that of conveyance owing to vibration. The feed rate of the threadlike piece, which determines the speed of the threadlike piece passed by vibration, is either faster or slower than the passing rate thereof. A feeder provided between the spool or the like and the inlet end of a tube controls the feed rate of a threadlike piece so that the feed rate determines the passing rate thereof. When a driven spool is used, the feed rate of a threadlike piece is adjusted by controlling the rotating speed of the spool. The feed rate may also be controlled by means of the friction between a threadlike piece and a guide to provide a support thereto that is provided upstream of the inlet end of a tube. For instance, the feed rate is decreased by increasing the friction therebetween. When the rotating speed of a spool is controlled and the friction of a guide is used, the feed rate of a threadlike piece cannot be made faster than the rate of conveyance by vibration. A threadlike piece may be sent to the inlet end of a tube by means of a feeder either only during the early stage of passing or continuously throughout the entire period of passing. In the latter case, the feeder pushes a threadlike piece into a tube through the inlet end thereof, passing the threadlike piece therethrough at a speed equal to the feed rate of the feeder. Using a feeder, the feed rate of a threadlike piece may also be kept below the speed of conveyance by vibration.

A coil of tube, which is either coreless or wound around a cylindrical core, can be vibrated by oscillating a member that holds or supports the coil by such known devices as a vibrating motor or an electromagnetic vibrator. The angle of vibration (i.e., the lead angle of helix), the frequency of vibration and the total amplitude of vibration in terms of vertical component are preferable between

5 degrees and 30 degrees, between 10 Hz and 30 Hz, and between 0.2 mm and 2.0 mm, respectively. An ultrasonic oscillator may be used, too.

To ensure that the inlet end of a tube does not diametrically move a portion of a threadlike piece upstream of and close to the inlet end, the inlet end of the tube is immovably fastened to the floor or suitable structure or device therearound. Also, the inlet end of a tube may be held in such a manner as to allow the longitudinal motion of the tube while restraining the diametrical motion thereof. Otherwise, a guide that extends substantially horizontally and opening upward may be connected to the inlet end of a tube so that the guide vibrates integrally with a coil of tube. A threadlike piece passed into the guide from above through the opening at the top is then led to the inlet end of the tube.

An apparatus for passing a threadlike piece through a tube according to this invention comprises a cylindrical member around which a tube through which a threadlike piece is to be passed is wound to form a coil thereof, a device to hold the inlet end of the tube so that the inlet end thereof does not diametrically move a portion of the threadlike piece upstream of and close to the inlet end of the tube, a device to vibrate the cylindrical member so that a given point of the tube reciprocates along a helical path, and a device to feed the threadlike piece into the coil of tube being vibrated from one end thereof.

In the apparatus just described, the device to hold the inlet end of the tube may be eliminated. Then the threadlike piece feeding device holds a coil of threadlike piece and feeds a threadlike piece, which is pulled out along the axis of the coil thereof by the vibration-induced carrying force acting on the threadlike piece in the tube, to the inlet end of the tube. The threadlike piece feeding device may be of such design as to control the feed rate of a threadlike piece at a point upstream of the inlet end of the tube so that the feed rate of the threadlike piece determines the passing rate thereof. Furthermore, the inlet end holding device and any of the threadlike piece holding devices just described may be combined into a single integral unit.

When a coil of tube is vibrated by the method and apparatus of this invention just described so that a given point of the tube reciprocates along a helical path, the inner wall of the tube exerts on the threadlike piece in the coiled tube a force that works in a diagonally forward and upward direction. Therefore, this force causes the threadlike piece in the tube to jump or slide along the inner wall of the tube in a diagonally forward and upward direction. Thus, the inner wall of the tube intermittently exerts a carrying force, which works in the direction of



the circumference of the coil, on the threadlike piece in the tube to cause the threadlike piece to advance therethrough.

When the inlet end of the tube is firmly held, no centrifugal works on the threadlike piece near the inlet end. Therefore, the threadlike piece does not jump out of the tube. Saved from a sudden diametrical motion, in addition, the threadlike piece near the inlet end is neither caused to remain ahead of the inlet end nor damaged.

When a threadlike piece to be fed to the tube is pulled out from a coil thereof along the axis of the coil, there is no need to rotate a spool and the coil wound therearound. Only a small amount of force is required for pulling out the threadlike piece from the coil. Therefore, the carrying force produced by vibration is enough for feeding the threadlike piece to the inlet end of the tube. The force to pull out the threadlike piece from the coil is not only small as mentioned above but also substantially constant. Such a force assures a stable feed of the threadlike piece to the inlet end of the tube, reducing the risk of the threadlike piece being passed stopping halfway.

When the feed rate of a threadable piece determining the passing speed of the threadlike piece is faster than the speed of the threadlike piece passed forward by vibration, the threadlike piece is forced into the tube through the inlet end thereof. Vibration not only generates a carrying force, but also facilitates the insertion of the threadlike piece by reducing the friction between the threadlike piece and the inner surface of the tube. The force needed for the forcible insertion must be great enough to overcome the frictional resistance the inner surface of the tube offers to the threadlike piece travelling therethrough and, at the same time, small enough not to break the threadlike piece. A proper amount of pushing force permits the threadlike piece to be passed forward at a higher speed than the speed attained with the conveyance by vibration alone. Pushing with such a force is also an effective way to overpower the frictional resistance offered by the inner surface of the tube. Conceivably, on the other hand, frictional resistance increases with an increase in the length of a threadlike piece passes through a tube. Therefore, effectiveness of forcing the threadlike piece disappears beyond a certain point. As such, the choice of a proper pushing force and speed requires careful considerations on such points. Generally, the risk of stopping halfway is smaller with the forced-in threadlike piece. Because of the aforementioned limit in applicable length, however, this method is suited only for tubes not longer than several hundred meters. When, on the other hand, the feed rate of a threadlike piece is slower than the speed of the threadlike piece, the threadlike

piece in the tube is pulled backward. This backward pulling reduces the undulation of the threadlike piece in the tube. The lessened undulation, in turn, decreases or eliminates the friction between the inner surface of the tube and the leading end of the threadlike piece at the peak of undulation. This substantially totally eliminates the risk of halfway stopping.

The method and apparatus of this invention assures efficient passing of a threadlike piece through a tube without causing degeneration and damage, even if the tube diameter is small (e.g., 2 mm or under in outside diameter) and the tube length is large (e.g., 1 km or over in overall length).

#### Brief Description of the Drawings

Fig. 1 is a side elevation showing a first preferred embodiment of an optical fiber passing apparatus according to this invention;

Fig. 2 is a plan view of a vibrating table of the same apparatus;

Fig. 3 is a vertical cross-sectional view showing how the inlet end of a tube is fastened;

Figs. 4 and 5 illustrate how an optical fiber is carried forward at the inlet end of a tube. Fig. 4 shows a case according to this invention, whereas Fig. 5 a case with a conventional method;

Fig. 6 is a side elevation showing a second preferred embodiment of an optical fiber passing apparatus according to this invention;

Fig. 7 is side elevation showing a third preferred embodiment of an optical fiber passing apparatus according to this invention;

Fig. 8 is a perspective view illustrating a method of forming a coil of optical fiber;

Fig. 9(a) and 9(b) illustrate how an optical fiber is carried forward at the inlet end of a tube;

Fig. 10 is a side elevation showing a fourth preferred embodiment of an optical fiber passing apparatus according this invention;

Fig. 11 is a side elevation showing a fifth preferred embodiment of a optical fiber passing apparatus according to this invention;

Fig. 12 is a plan view of a vibrating table of the apparatus shown in Fig. 11;

Fig. 13 is a detail view of a roll feeder and a tube holder on the apparatus shown in Fig. 11;

Fig. 14 illustrates how an optical fiber is carried forward at the inlet end of the tube on the apparatus shown in Fig. 11;

Fig. 15 shows the condition of an optical fiber in the tube, with different surplus lengths;

Fig. 16 is a side elevation showing a sixth preferred embodiment of an optical fiber passing apparatus according to this invention;

Fig. 17 is a side elevation showing a seventh preferred embodiment of an optical fiber passing apparatus according to this invention;

Fig. 18 is a perspective view of an optical fiber guide attached to a bobbin on the apparatus shown in Fig. 17;

Fig. 19 illustrates how an optical fiber is carried forward at the inlet end of a tube on the apparatus shown in Fig. 11;

Fig. 20 is a side elevation showing an eighth preferred embodiment of an optical fiber passing apparatus according to this invention;

Fig. 21 is a side elevation showing a ninth preferred embodiment of an optical fiber passing apparatus according to this invention; and

Fig. 22 is a side elevation showing a tenth preferred embodiment of an optical fiber passing apparatus according to this invention.

#### Description of the Preferred Embodiments

In all preferred embodiments of this invention to be described hereunder, an optical fiber is passed through a steel tube.

#### (Preferred Embodiment I)

A preferred embodiment of an apparatus to implement a passing method of this invention will be described first. Fig. 1 is an overall view of a passing apparatus according to this invention, and Fig. 2 is a plan view of a vibrating table on the same apparatus.

A base 11 is firmly fastened to the floor 10 so as not to vibrate. Coil springs 18 to support a vibrating table are mounted at the four corners of the top surface of the base 11.

A flat square vibrating table 14 is placed on the base 11, with the support springs 18 interposed therebetween. A support frame 15 extends downward from the bottom surface of the vibrating table 14.

The support frame 15 under the vibrating table 14 carries a pair of vibrating motors 21, 22. The vibrating motor 22 is placed diametrically opposite the motor 21 relative to the central axis C of the table 14. The rotating shafts of the vibrating motors 21, 22 are respectively parallel to a vertical plane containing the central axis C and oppositely tilted with respect to the surface of the vibrating table at an angle of 75 degrees. Unbalanced weights 24 are fastened to both ends of the rotating shafts of the vibrating motors 21, 22. The centrifugal force resulting from the rotation of the unbalanced weights 24 exerts a vibrating force on the vibrating table 14

that works aslant to the surface thereof. The paired vibrating motors 21, 22 are driven in such a manner that the vibrations they make have an equal frequency and amplitude, the vibrating forces they exert are displaced 180 degrees away from each other. When the vibrations caused by the paired motors 21, 22 are combined, the vibrating table 14 vibrates in such a manner as to move along a helical path whose central axis coincides with the central axis C of the vibrating table 14. But the vibration of the vibrating table 14 is not transmitted to the base 11 because of the support springs 18 interposed therebetween.

Such vibrating means as those employing cranks, cams or electromagnets may be used in place of the vibrating motors 21, 22. Also, the vibrating motors 21, 22 may be attached to the vibrating table 14 in other ways than that shown in the figures.

A bobbin 27 is fastened on the vibrating table 14 in such a manner that the axis thereof coincides with the central axis C of the vibrating table 14. A tube 1 through which an optical fiber 7 is to be passed is coiled around the bobbin 27. The optical fiber 7 is fed into the tube 1 from the upper end of a coil 6 of the tube. To ensure that no excessive bending stress develops in the optical fiber, the coil 6 of the tube should preferably have a diameter of not smaller than 150 mm. The optical fiber 7 used in this embodiment consists of an element optical fiber precoated with resin. The tube 1 is a steel tube. The outer periphery of the bottom flange 29 of the bobbin 27 is fastened to the vibrating table 14 with fastening jigs 31 so that the vibration of the vibrating motors 21, 22 is surely received. The bobbin 27 has a groove (not shown) cut around the circumference thereof, with successive ridges and recesses pointing to the axis thereof. The groove is designed so that the tube 1 comes in close contact therewith.

A feed spool 34, which constitutes an optical fiber feeder 33, is placed beside the bobbin 27. The feed spool 34 is rotatably supported on a bearing stand 35. The feed spool 34 pays off the optical fiber 7 wound therearound to the flared inlet end 3 of the tube.

A drive motor 38 is provided next to the feed spool 34. The feed spool 34 and drive motor 38 are interlocked through a belt transmission 40. Rotated by the drive motor 38, the feed spool 34 pays off the optical fiber 7 to the tube 1 wound around the bobbin 27.

A cylindrical support guide 43 is provided near the point where the feed spool 34 pays off an optical fiber. The support guide 43 supports the optical fiber 7 paid off from the feed spool 34.

An optical fiber feed condition sensor 47 is installed downstream of the support guide 43. The



optical fiber feed condition sensor 47 comprises a support column 48 and an optical fiber level sensor 49 attached thereto. The optical fiber level sensor 49 comprises an image sensor and an oppositely disposed light source. Installed in the pass line of the optical fiber 7, the optical fiber level sensor 49 senses the sagging condition thereof. A CCD line sensor is used as the image sensor.

To the optical fiber feed condition sensor 47 is connected a rotation speed controller 52 that controls the voltage of a power supply 39 to said drive motor 38 on the basis of signals from the optical fiber feed condition sensor 47. The rotation speed of the drive motor 38 or, in other words, the pay-off speed of the optical fiber 7 is controlled according to the level at which the optical fiber 7 interferes with the travel of the light from the light source in the optical fiber level sensor 49.

The speed with which the optical fiber 7 is passed through the tube 1 is not always constant but may vary when resonance occurs or depending on the surface condition of the inner wall of the tube 1 and the optical fiber 7. A change in the running speed of the optical fiber 7 in the tube 1 affects the feeding condition of the optical fiber 7 on the outside. If the feed speed fails to follow the passing speed, the optical fiber 7 may either sag excessively or overstretch and break, hindering smooth feeding of the optical fiber 7. But the feed speed of the optical fiber 7 can always be kept within the desired range by varying or stopping the rotation of the feed spool 34 depending on the travelling condition of the optical fiber 7 in the tube 1. Then, the optical fiber 7 is kept in the optimum condition (with a slight sagging as shown in Fig. 1), without oversagging or overstretching. Consequently, the optical fiber 7 is passed through the tube 1 without a hitch, with no load imposed thereon or no resistance offered to the passage thereof. Incidentally, an optical fiber 0.4 mm in diameter does not go into a steel tube having an inside diameter of 0.5 mm if a force of 20 gf or greater works thereon in a direction opposite that of feeding.

A cylindrical support guide 54 and an electromagnetic feeder 55 are provided on the exit side of the optical fiber feed condition sensor 47. The electromagnetic feeder 55 sends an optical fiber 7 from the support guide 54 to the flared end 3 of the tube.

The inlet and outlet of the support guides 43 and 54 should preferably have a smooth curved surface. The support guides 43 and 54 must be made of such materials as glass and plastic whose coefficient of friction is low enough to assure a smooth travel of the optical fiber 7. Provision may be made to supply such a solid lubricant as a powder of carbon, talk, molybdenum disulfide, etc. to the surface of the optical fiber 7 travelling

through the support guides 43, 54.

A metal tube holder 57 is provided on the exit side of the electromagnetic feeder 55. The inside of the metal tube holder 57 is funnel-shaped as shown in Fig. 3.

Now a method of passing an optical fiber 7 through a tube 1 using the above-described apparatus will be described.

A coil 6 is formed in advance by winding a tube 1 around a bobbin 27. The tube 1 wound around the bobbin 27 need not always be in a single ring, but in multiple rings. In a coil of multiple rings, the first ring fits closely in a groove cut in the surface of the bobbin 27. The second and subsequent rings are arranged to fit in the recesses formed between the turns of the tube 1 of the preceding ring. Then, the bobbin 27 carrying the wound tube 1 is fastened on the vibrating table 14 in such a manner that the axis of the coil coincides with the central axis C of the vibrating table 14.

A suitable length of the tube is cut off from an unwound ring of the coil 6 following the lead-in section 2 thereof. The cutoff length of the tube is curved in a horizontal plane. Then, the inlet end 4 of the tube passed through a guide hole 58 in the metal tube holder 57 is flared into a funnel-shape, and fastened to the metal tube holder 57 with a metal fastener 59. The remotest end 5 of the lead-in section 2 is fastened to the flange 29 of the bobbin 27 with a metal fastener 61.

On the other hand, an optical fiber 7 consisting of a precoated element fiber, is wound around the feed spool 34. The leading end 8 of the optical fiber 7 pulled out of the feed spool 34 is inserted through the metal tube holder 57 into the inlet end 4 of the tube, after passing through the support guide 43, optical fiber feed condition sensor 47, support guide 54 and feeder 55.

The drive motors 21, 22, the feeder 55 and the drive motor 38 of the feed spool 34 are started in that order.

With the drive motors 21, 22 attached to the vibrating table 14 in the place and position described previously, the vibrating table 14 is then subjected to a torque working around the central axis C thereof and a force working therealong. Consequently, a given point on the vibrating table moves along a helix H shown in Fig. 1. The vibration V thus produced is transmitted from the vibrating table 14 through the fastening jigs 31, the bobbin 27 and the coil 6 of tube to the lead-in section 2 thereof.

Referred now to Figs. 3 and 4 (in Fig. 4, the curved lead-in section 2 of the tube is shown as a straight tube for convenience's sake), how the optical fiber 7 enters the tube 1 when the passing operation is started. The lead-in section 2 has a midway transition point T where the direction of

vibration coincides with the center of the curvature of the inlet 2. In the section (hatched in Fig. 3) between the flared end 3 and the transition point T, vibration transmitted from the inner wall of the tube to the optical fiber 7 produces no conveying force. In this section, the pushign force of the feeder 55 sends the leading end of the optical fiber 7 forward. Also in this section, vibration keeps the optical fiber 7 from sliding along the inner wall of the tube, reduces the friction between the optical fiber 7 and the inner wall of the tube, and facilitates the forward motion of the leading end of the optical fiber 7 pushed by the feeder 55.

In the section between the transition point T and the remotest end 5 of the lead-in section 2 end, the conveying component of vibration increases progressively. The optical fiber 7 behind this section, or between the flared end 3 and the transition point T, is inside the tube and under the influence of the driving force of the feeder 55. Therefore, no force to prevent advance (owing to both the effect of centrifugal force and the static inertia of the optical fiber behind) works on the leading end of the optical fiber 7 in this section. As such, the leading end of the optical fiber 7 advances if the vibrating tube exerts any conveying force at all on the optical fiber 7 (or if the angle between the directions of vibration and passing is acute). The conveying force resulting from vibration carries the optical fiber 7 forward after the leading end thereof has passed the transition point T. When the leading end reaches the remotest end 5 of the inlet 2, the remotest end 5 lies at the uppermost end of the coil 6, with the optical fiber 7 passed into the tube 1 substantially along a line tangent to the coil 6. Once the optical fiber 7 has thus been properly passed into the tube 1, the rotation of the feeder 55 is stopped. Afterward, the feeder 55 serves as a holding guide.

With the technology disclosed in EPC Patent No. 91717, incidentally, the leading end of an optical fiber is inserted by a given distance L before passing is started, as shown in Fig. 5. Accordingly, conveying force produced by vibration must be exerted on the optical fiber 7 at the flared end 3 to make the conveying force great enough to overcome a force owing to the effect of centrifugal force and a force owing to the static inertia of the optical fiber 7 behind the inlet end 3. The conveying force resulting from vibration becomes equal to the combined force to prevent the advance of the optical fiber at point P. Said distance L is greater than the distance between point P and the flared end 3 of the tube. The optical fiber does not advance while the leading end thereof stays upstream of point P. It is not until the leading end has passed point P that the optical fiber begins to move forward.

As is obvious from Figs. 4 and 5, the conventional method inserts a considerable length of optical fiber into the tube before starting passing. By contrast, the preferred embodiment of this invention being described does not require such preliminary insertion.

Driven by a component of the force exerted by the inner wall of the tube 1 which works in the circumferential direction of the coil, the optical fiber 7 in the coil 6 of the tube moves further into the tube. Because the axis of the coil coincides with the central axis C of the vibrating table 14, the optical fiber 7 in the tube moves in a circle about the central axis C (in the clockwise direction P in an embodiment shown in Fig. 2).

Reference is now made back to Fig. 1.

When the helical vibration is transmitted through the vibrating table 14 to the coil 6 of the tube, the optical fiber 7 fed from the flared end 3 of the tube above the coil 6 continuously moves forward through the tube 1. That is, the vibration of the coil 6 moves the optical fiber 7 paid off from the feed spool 34 forward through the support guide 43, optical fiber feed condition sensor 47, support guide 54, feeder 55, flared end 3 of the tube, inlet 2, coil-formed tube 1, and outlet end of the tube. Thus, the optical fiber 7 is passed through the entire length of the coil 6 of the tube in a given time. Because the inlet end 4 the tube is fastened, the flared end 3 causes no damage to the optical fiber 7.

Any variation in the passing speed of the optical fiber 7 affects the feed condition thereof at the point where the optical fiber level sensor 49 is installed, with the resulting change in the feed condition being instantly detected by the optical fiber level sensor 49. If the optical fiber level sensor 49 senses that the optical fiber 7 is overstretched, a corresponding signal will be sent to the drive motor 38 to increase the rotation speed of the feed spool 34, thereby increasing the feed speed of the optical fiber 7. If an excessive sagging of the optical fiber 7 is sensed, the drive motor 38 will be controlled to slow down the feed speed of the optical fiber 7. In this way, any abnormal condition in the forward travel of the optical fiber is instantly sensed, corrected and returned to the normal condition.

#### (Preferred Embodiment II)

Fig. 6 shows another embodiment of this invention. In all of the following embodiments, the devices and members similar to those shown in Figs. 1 to 3 will be designated by the same reference numerals, with detailed description thereof omitted.

In this second preferred embodiment, the op-



tical fiber 7 paid off from the coil 9 thereof drops into the lead-in section 2 of the tube under its own weight.

A frame 64 is fastened to the floor 10 diagonally above a vibrating table 14. A bobbin 66 around which an optical fiber 7 is wound is palced on the frame 64.

An optical fiber guide 68 is provided next to the frame 64. The optical fiber guide 68 has a guide tube 70 supported by a bracket 69. The guide tube 70 consists of a vertical portion 71 and a curved portion 72 curved diagonally downward. The upstream end of the curved portion 72 of the guide tube 70 opens diagonally downward. The surface of the frame 64 on which the bobbin is placed is tilted so that the axis of the coil of the optical fiber faces the opening of the curved portion 72 of the guide tube 70.

A metal tube holder 74 is provided next to the optical fiber guide 68 on the exit side thereof. The metal tube holder 74 has a through hole 75. Because the end 3 of the tube passed through the through hole 75 is flared, the inlet end 4 of the tube is firmly held in the through hole 75. As such, the inlet end 4 of the tube held by the metal tube holder 74 does not move, either diametrically or longitudinally.

The tube 1 is wound around the bobbin 27 to form a coil 6 of the tube, with the last ring thereof fastened with an adhesive tape 30. The lead-in section 2 of a given length is unwound from the coil, curved upward and extended. The inlet end 4 is fastened to the metal tube holder 74. A coil 9 of the optical fiber 7 is as wound at the fiber manufacturer. The forward end of the optical fiber 7 paid off from the bobbin 66 is passed into the inlet end 4 through the guide tube 70. Then, drive motors 21, 22 are started. A reversed torsion, which will be described later, is not given to the optical fiber 7 wound into the coil 9.

The optical fiber 7 falls under gravitation through the vertical portion 71 of the guide tube 70 and the lead-in section 2 of the tube 1. As such, this embodiment reduces the load to be born when the optical fiber 7 is unwound from the coil 9 and the length of the optical fiber 7 to be passed in initially.

#### (Preferred Embodiment III)

Fig. 7 shows a third embodiment of this invention. In this embodiment, the inlet end of a tube is held in such a manner as not to permit diametrical motion alone. Longitudinal motion is permitted. Also, a feeder is provided to push an optical fiber into the tube, which permits passing the optical fiber through the tube at a speed faster than the

speed of conveyance by vibration. But this embodiment is not applicable to longer tubes whose length exceeds several hundred meters because of the limit in the passable length of the optical fiber mentioned previously.

As shown in the figure, an optical fiber container 77 is provided beside the bobbin 27. The optical fiber container 77 consists of a cylindrical container proper 78 having an open top. The container 77 contains an optical fiber 7 is fed into the container proper 78 that is mounted and rotated on the turn table (not shown), as will be described later.

An optical fiber guide 81 is disposed next to the optical fiber container 77. The optical fiber guide 81 has a guide tube 83 supported on a stand 82. The downward-curved inlet end of the guide tube 83 opens toward the optical fiber container 77 substantially on the central axis thereof.

A belt feeder 86 is disposed on the exit side of the optical fiber guide 81. The belt feeder 86 comprises a pair of endless belts 88, one lying on top of the other, on a table 87. Driven by motor-powered pulleys 89, the belts 88 send the optical fiber 7 from the optical fiber guide 81 held therebetween to the inlet end 4 of the tube.

A cylindrical metal tube holder 92 is placed on the exit side of the belt feeder 86. The inlet end 4 of the tube is passed through the metal tube holder 92 whose inside diameter is somewhat larger than the outside diameter of the tube 1. Though allowed to slide longitudinally, the inlet end 4 of the tube is not permitted to move diametrically, i.e., up and down and sidewise.

The following is a method of passing an optical fiber 7 through a tube 1 using the above-described apparatus.

While a coil 6 of the tube is formed, a coil 9 of the optical fiber 7 is formed inside the optical fiber container 77 by laying up piles thereof. A bobbin 27 carrying a coil of the tube 1 is fastened to a vibrating table 14 with a through bolt 32. The optical fiber 7 is pulled up to above the optical fiber container 77, proceeding downward from the uppermost loop of the coil 9. On this occasion, each loop of the optical fiber 7 is twisted 360 degrees maximum. To regain the original condition, the twisted optical fiber warps inside the tube 1, offering a resistance to conveyance. Therefore, a reversed twist should preferably be given to the optical fiber 7 when it is fed into the container 77 so that the twist the optical fiber 7 receives on being unwound is offset. The optical fiber thus kept in a container does not curl like the one wound around a spool or the like.

Fig. 8 shows a method of giving a reversed twist to an optical fiber 7. The optical fiber 7 is fed through a guide tube 95, caterpillar feeder 95 and a



rotating guide tube 97 into the container proper 78 of the optical fiber container 77. The rotating guide tube 97 is eccentric to the container proper 78 by  $\delta$ , and rotated by a motor (not shown) through a gear transmission 98. The container proper 78 and the rotating guide tube 97 are rotated in the same direction, about the central axes X and Y thereof. Fed from the rotating guide tube 97, the optical fiber 7 is circumferentially piled up from the bottom of the container proper 78 to form a coil, becoming progressively eccentric by a width of  $2\delta$ . If the rotating speed of the container proper 78 is  $V_P$  and that of the rotating guide tube 97 is  $V_G$ , the angle of a reversed twist  $\theta = 360^\circ (1 - V_P/V_G)$ . If the rotating speed  $V_P$  of the container proper 78 is made sufficiently smaller than the rotating speed  $V_G$  of the rotating guide tube 97, the angle of the reversed twist  $\theta$  becomes substantially equal to 360 degrees. Therefore, the optical fiber 7 forms no kink when unwound from the coil 9.

Then, a given length of the optical fiber 7 taken out of the container 77 is passed through the optical fiber guide 81, the belt feeder 86 and the flared end 3 of the tube unit until the leading end 8 of the optical fiber 7 enters the tube 1.

When preparations for passing are completed, the vibrating motors 21, 22 and belt feeder 86 are started.

Referring not to Figs. 9(a) and 9(b), the advance of the optical fiber 7 into the tube 1 will be described. Because the metal tube holder 92 firmly holds the inlet end 4, the lead-in section 2 does not move up and down and sidewise, though vibrating longitudinally. Therefore, no driving force  $f$  owing to vibration works on the optical fiber 7 at the lead-in section 2 of the tube 1. The advance of the optical fiber 7 in this region is solely due to the pushing force  $F$  exerted by the belt feeder 86.

In the coil 6 of the tube 1 lying beyond the remotest end 5 of the lead-in section 2, the tube 1 vibrates helically, with the inner wall thereof pushes up the optical fiber 7 diagonally forward. Therefore, the optical fiber 7 jumps, or slides along the inner wall of the tube, diagonally forward. Thus, a circumferential component of the force exerted by the inner wall of the tube 1 and a pushing force exerted by the belt feeder 86, in combination, cause the optical fiber 7 to travel forward in the tube. That is, the two forces produced by vibration and exerted by the feeder move the optical fiber 7 forward through the tube.

The optical fiber 7 pushed by the belt feeder 86 into the flared end 3 of the tube will encounter the following resistances:

(a) Resistance the friction with the tube wall offers to forward travel;

(b) Resistance the coiled tube offers to forward travel;

(c) Resistance the kinked optical fiber offers to forward travel; and

(d) Backward force from near the top of the inner wall of the tube.

Resistances (b) and (c) work to increase the frictional resistance (a).

Because resistance (b) is greater in the coiled tube 1 than in a straight tube, transmission of the pushing force from the flared end 3 throughout the entire length of the optical fiber is not as easy. However, the helical vibration of the coil 6 produces an equal (uniform) vibration at all points of the tube 1. The vibration is a simple harmonic motion slanting in the longitudinal direction of the tube, having a horizontal component tangential to the coil 6 of the tube and exerting a driving force  $f$  on the optical fiber 7. The driving force  $f$  works tangentially to the coil 6 of the tube at all points thereof. Therefore, the driving force  $f$  always works on the optical fiber 7 in the tube 1 in the longitudinal direction thereof or in the direction of travel. Working along the curve of the tube, the driving force  $f$  reduces the friction owing to vibration and keeps the optical fiber 7 from getting pressed against the tube wall. In other words, the driving force  $f$  works to keep the optical fiber 7 from getting out of the right path. The optical fiber 7 pushed by force  $F$  into the curved tube from the flared end 3 moves forward as if it was traveling through a straight tube under the influence of the driving force  $f$ . The vibration of the tube 1, of course, reduces the friction between the optical fiber and the tube wall. The method of this invention, therefore, overcomes the resistance (a) from the friction with the tube wall by vibration and the resistance (b) owing to the curved tube 1 by a combination of vibration and the driving force  $f$ . Keeping the optical fiber 7 in the tube from sagging, the driving force  $f$  assures easier transmission of the pushing force  $F$  throughout the entire length of the optical fiber. The resistance (c) owing to the kink of the optical fiber can also be overcome by feeding a pre-twisted optical fiber 7 from a coil 9 held in the optical fiber container 77. The optical fiber 7 kept in this condition has no tendency to kink. The frictional resistance (a) from the tube wall can be reduced by applying a lubricant on the surface of the optical fiber, too. The resistance (b) owing to the curved tube can also be reduced increasing the coil diameter.

Allowed to move in the longitudinal direction to the tube 1, the inlet end 4 thereof is less subjected than otherwise to the repeated bending force exerted by the vibrating tube 1, thus remaining undamaged.

## (Preferred Embodiment IV)

Fig. 10 shows still another embodiment of this invention. In this embodiment, the inlet end of the tube is firmly held. A conveying force resulting from vibration pulls out an optical fiber from a coil thereof.

An optical fiber container 77 and an optical fiber guide 81 are placed beside a bobbin 27.

A tube holder 101 is stands next to the optical fiber guide 81 on the exit side thereof. The tube holder 101 has a casing 103 supported by a stand 102, with guide rolls 104 rotatably set in the casing 102. The guide rolls 104 are paired in such as manner as to hold a tube 1 therebetween. The pairs of guide rolls are alternately set in the vertical and horizontal positions. As such, the inlet end 4 of the tube held by the tube holder 101 is allowed to move longitudinally, but not diametrically.

By winding a tube 1 around the bobbin 27, a coil 6 of the tube is formed in advance. A ring of the tube 1 making up the lead-in section 2 thereof is then unwound from the coil 6 and cut into a suitable length. The lead-in section 2 of the tube 1 is then pulled from the coil 6 to the tube holder 101. After the inlet end 4 has been passed through the tube holder 101, the foremost end 3 of the tube is flared into a funnel-like shape. The remotest end 5 of the lead-in section 2 is immovably fastened to the flange 29 of the bobbin 27 with a metal fastener 61. An optical fiber 7 is placed in the optical fiber container 77.

A given length of the optical fiber 7 unwound from the coil 9 in the container 77 is passed into the tube 1 through an optical fiber guide 81 and the flared end 3 thereof. Because only the leading end 8 of the optical fiber 7 is inserted in the tube 1, the conveying force the vibrating tube 1 exerts on the optical fiber 7 is limited to the lead-in section 2 of the tube. Accordingly, the conveying force is too small to unwind from the coil 9 and carry to the flared end 3 that portion of the optical fiber 7 which follows the lead-in section 2. The length of the preliminarily inserted optical fiber is between a few meters and ten-plus meters, varying with the size and surface condition of the tube 1 and optical fiber 7 and the condition of the coil 9 of the optical fiber 7. A pull force on the order of several tens of grams works on the optical fiber 7 as a result of the preliminary insertion. The preliminary insertion is done either manually or by feeding through pinch rolls.

When preparations for passing are complete, drive motors 21, 22 are started. Carried forward by the action of helical vibrations, the optical fiber 7 unwound from the coil 9 in the optical fiber container 77 continuously moves into the tube 1 through the flared end 3 thereof.

## (Preferred Embodiment V)

Figs. 11 and 12 show yet another embodiment of this invention.

A guide tube 107 is fastened to the cover 79 of an optical fiber container 77. The guide tube 107 extends from the top of the container 77 to a roll feeder 57.

A roll feeder 110 is disposed on the exit side of the guide tube 107. As shown in Fig. 13, the roll feeder 110 has a drive roll 112 rotatably set in a housing 111. The drive roll 112 is rotated by a gear motor 114 whose speed, in turn, is controlled by a speed controller 115. To the housing 111 is connected an arm 117 by means of a pin 118. The arm 117 carries a rotatably mounted hold-down roll 120 at the tip thereof. The arm 117 is manually rotated about the pin 118 to bring the hold-down roll 120 into and out of contact with the drive roll 112. The drive roll 112 and hold-down roll 120 are respectively covered with rubber tires 113, 121. The drive roll 112 and hold-down roll 120 hold the optical fiber 7 from the guide tube 107 under the weight of the hold-down roll 120. The rotation of the drive roll 112 sends the optical fiber 7 into the inlet end 4 of the tube.

A tube holder 124 is disposed on the exit side of the roll feeder 110, with an optical fiber feed condition sensor 47 placed therebetween. As shown in Fig. 13, the tube holder 124 comprises an outer cylinder 124, an intermediate cylinder 125 and an inner cylinder 127. A stand 129 fastens the outer cylinder 125 to the floor 10. A number of rotatable balls 130 are fitted on the intermediate cylinder 126. The balls 130 projecting on both sides of the intermediate cylinder 126 are in contact with the inner surface of the outer cylinder 125 and the outer surface of the inner cylinder 127. Therefore, the inner cylinder 127 is allowed to rotate and move axially, but not permitted to move diametrically. A top ring 131 is fitted near each end of the inner cylinder 127 to prevent the disengagement thereof from the outer cylinder 125.

The inlet end 4 of the tube is inserted in the inner cylinder 127 of the tube holder 124 and fastened with a setscrew 132. The roll feeder 110 pulls out the looped up optical fiber 7 from the top end thereof. The optical fiber 7 is then fed to the tube 1 through the guide tube 107, roll feeder 110, optical fiber feed condition sensor 47 and tube holder 124.

Referring to Fig. 14, the advance of the optical fiber 1 into the tube 1 immediately after the start of insertion will be described now. Near the flared end 3, the tube 1 is allowed to move only axially, not diametrically. Therefore, the inner wall of the vibrating tube exercises no conveying force on the optical fiber 7 in this region. But the roll feeder 110



advances the leading end 8 of the optical fiber 7. The vibration of the tube also reduces the friction between the leading end 8 of the optical fiber 7 and the inner wall of the tube, thereby facilitating the action of the roll feeder 110 to advance the leading end 8 of the optical fiber 7.

In a positive vibration area following the area in which diametrical vibration is inhibited, the diametrical component of vibration increases progressively. No force to check advance (owing to the centrifugal effect and the static inertia of the optical fiber behind) works on the leading end of the optical fiber 7 in this region because the optical fiber 7 in the upstream diametric vibration inhibited area is inside the tube and, in addition, under the influence of the driving force exerted by the roll feeder 110. Accordingly, the conveying force owing to vibration causes the optical fiber 7 to advance when the leading end thereof enters the positive vibration area. When the leading end of the optical fiber 7 reaches the remotest end 5 of the lead-in section 2 of the tube, the remotest end 5 is at the uppermost end of the coil 6 of the tube. Thus, the optical fiber 7 is passed into the tube 1 substantially tangentially to the coil 6. When the optical fiber 6 has thus been properly brought into the regular passing position, the drive roll 112 of the roll feeder 110 is stopped, with the hold-down roll 67 retracted above away from the optical fiber. After this, the drive roll 112 serves as a guide to hold the optical fiber.

In the above example, the drive roll 112 of the roll feeder 110 was stopped and functionally switched into a holding guide after the optical fiber 7 has been brought into the passing position. But the drive roll 112 may instead be allowed to continue driving even in that state. In this instance, the feed rate of the optical fiber is adjusted so that the speed with which the optical fiber 7 is fed to the flared end 3 of the tube is below the speed of the optical fiber 7 conveyed by the action of vibration. That is, the roll feeder 110 exerts a braking force on the optical fiber 7 being passed into the tube 1. This permits adjusting the surplus length of the optical fiber 7 in the tube 1. The surplus length increases as the feed rate of the optical fiber becomes closer to the speed of the optical fiber 7 conveyed forward by helical vibration, and vice versa. By the same method, the undulation of the optical fiber passed through the tube can be reduced, too. The less the undulation, the fewer will be the chances of the optical fiber coming in contact with the top surface of the inner wall of the tube. Then, the optical fiber is passed forward more smoothly.

The optical fiber 7 passed into the tube 1 must have a proper surplus length. Fig. 15(a) shows an optical fiber 7 with an insufficient surplus length. Such an optical fiber involves the risk of breaking,

unable to follow an elongation that might occur when temperature changes. Fig. 15(b) shows an optical fiber with a proper surplus length. Fig. 15(c) shows an optical fiber with an excess surplus length. Such an optical fiber bends more, receives greater pressure from the tube wall and, thus, travels forward less smoothly. An appropriate surplus length can be obtained by adjusting the feed rate of the optical fiber as described above.

An optical fiber 7 being passed into a tube 1 may sag between the roll feeder 110 and tube holder 124. On detecting a sag, the optical fiber feed condition sensor 47 sends a signal to decelerate the drive roll 112 of the roll feeder 110, thereby eliminating the sag. The drive roll 112 stops when the sagging of the optical fiber 7 exceeds a preset limit.

#### (Preferred Embodiment VI)

Fig. 16 shows still another embodiment of this invention.

This embodiment is a modified version of the preferred embodiment II shown in Fig. 6. This embodiment differs from the embodiment II in Fig. 6 in that the inlet end of the tube is longitudinally movable and that the optical fiber 7 from a feed spool 34 is directly fed to a guide tube 135. Part of the feed spool 34 on an optical fiber feeder 33 projects forward from the floor 10, with the straight guide tube 135 vertically disposed directly thereunder. In this embodiment, the rotating speed of the feed spool 34 is adjusted so that the feed rate of the optical fiber 7 to the inlet end 3 of the tube is below the speed with which the optical fiber is conveyed forward by the action of vibration. An optical fiber feed condition sensor of the type described before may be installed to detect the sagging of the optical fiber 7. Then, the rotation of the feed spool 34 may be either decelerated or stopped according to the amount of sagging detected.

#### (Preferred Embodiment VII)

Fig. 17 shows a seventh embodiment of this invention.

An optical fiber feeder 33 and an optical fiber feed condition sensor 47 are disposed diagonally above a bobbin 27. A bend 138 is provided on the exit side of the optical fiber feed condition sensor 47. The bend 138 leads the optical fiber 7 from the optical fiber feed condition sensor 47 to an optical fiber guide 140. The inlet and outlet ends of the bend 138 should preferably have a smoothly machined curved surface. To ensure that the falling of the optical fiber 7 under gravity is not inhibited,



the bend 138 must be made of such material with a low coefficient of friction as glass and plastics.

An optical fiber intake guide 140 is disposed directly below the bend 138. The main portion 141 of the intake guide 140 is shaped like a trumpet as shown in Fig. 18, having a slit 142 that opens upward. The intake guide 140 is suspended from the top flange 29 of the bobbin 27 by means of a metal holder 144.

Provision may be made in the bend 138 or optical fiber intake guide 140 to apply a solid lubricant, such as a powder of carbon, talk, and molybdenum disulfide on the surface of the optical fiber 7 passing therethrough.

In this apparatus, the inlet end 4 of the tube is fastened to the top flange 29 of the bobbin 27 with a metal fastener 146. Then, the smaller-diameter end of the intake guide proper 141 is connected to the tip 3 of the tube. Referring now to Figs. 18 and 19, the forward motion of the optical fiber 7 at the inlet of the tube 1 will be described. The optical fiber 7 fed from the optical fiber feeder 33 to the bend 138 falls through the slit 142 into the optical fiber intake guide 140 under its own weight. The optical fiber intake guide 140 vibrates together with the coil 6 of the tube. Therefore, the optical fiber 7 in the intake guide 140 enters the tube from the lead-in section 2 thereof, under the influence of the conveying force produced by the vibration V of the inner wall of the guide. The slit 142 in the intake guide 140 is of such width that the edges 143 thereof remains out of contact with the optical fiber 7 fed from above even when the guide 140 vibrates together with the bobbin 27. Therefore, the optical fiber 7 does not spring out from the inlet end 3 of the vibrating tube.

(Preferred Embodiment VIII)

Fig. 20 shows an eighth embodiment of this invention, which is a modified version of the fourth embodiment. A major difference from the fourth embodiment is that the inlet end of the tube is not fastened.

A deflector roll 149 is provided directly above an optical fiber container 77 beside a bobbin. A guide roll 150 is disposed near the inlet end of the tube. The conveying force resulting from vibration pulls out the optical fiber 7 along the axis of a coil 9 thereof in the container 77. Supported and led by the deflector roll 149 and guide roll 150, the optical fiber 7 thus pulled out travels to the inlet end 3 of the tube.

With the apparatus just described, the passing operation can be carried out in the same way as with the foregoing embodiments, except that preliminary insertion is indispensable. The deflector

roll 149 and guide roll 150, whose function is not more than to support and guide the optical fiber 7, may be either rotatable or stationary.

(Preferred Embodiment IX)

Fig. 21 shows a ninth embodiment of this invention, which is a modified version of the fifth embodiment. A major difference from the fifth embodiment is that the inlet end of the tube is not fastened.

A roll feeder 110 is disposed next to a guide tube 107 fastened to the cover 79 of an optical fiber container 77 of the exit side thereof. The exit end of the roll feeder 110 is close to the inlet end of the tube. Though not shown, the roll feeder 110 has a gear motor 114 and a speed controller 115 of the type shown in Fig. 13.

With the apparatus just described, the passing operation can be carried out in the same way as with the foregoing embodiments. No preliminary insertion is needed. This apparatus permits pushing in the optical fiber 7 into the tube 1 as required. Or otherwise, a brake may be applied to the optical fiber 7 carried forward by the force of vibration. In the latter case, the braked optical fiber 7 in the tube 1 is pulled backward. The resulting reduction in undulation permits a stable insertion of the optical fiber 7 as described previously.

Preferred embodiments VIII and IX can be designed simply.

(Preferred Embodiment X)

Fig. 22 shows a last embodiment of this invention, which is a modified version of the fifth embodiment. A major difference from the fifth embodiment is that a second roll feeder is provided on the exit side of an optical fiber container to pull out an optical fiber therefrom.

As shown in the drawing, a second roll feeder 153, a second optical fiber feed condition sensor 155 and a support guide 157 are disposed between an optical fiber container 77 and a first roll feeder 110. The second roll feeder 153 and second optical fiber feed condition sensor 155 are of the same structure as the first roll feeder 110 and a first optical fiber feed condition sensor 47. The support guide 157 is of the same design as the support guide 54 shown in Fig. 1. The length of the support guide 157 is determined according to the distance between a bobbin 27 and an optical fiber container 77. For example, the optical fiber container 77 is separated from the bobbin 27 (by, for instance, 10 m), the length of the support guide 157 is increased accordingly.

The second roll feeder 153 feeds the optical fiber 7 pulled out of the optical fiber container 77 to the first roll feeder 110. The optical fiber 7 is fed to the first roll feeder 110 in such a manner as to sag between the second roll feeder 153 and support guide 157. Consequently, no tension works on the optical fiber 7 while being fed to the first roll feeder 110. The second roll feeder 153 ensures the pull-out of the optical fiber 7 from the optical fiber container 77. In this embodiment, a tube holder 124 holds the inlet end of the tube. But the inlet end need not be held when the tube length is relatively short.

#### (Example)

In order to confirm the effect of this invention, an optical fiber was passed through a steel tube, using the apparatus shown in Fig. 11, under the following conditions:

##### (1) Test Specimens

###### Coils of steel tubes:

Seven different coils (having 10 to 20 layers of rings), each being orderly wound around a steel bobbin having a barrel diameter of 1200 mm, of seven different steel tubes 10km in length, having an outside diameter of 0.8 mm to 2.0 mm and an inside diameter of 0.5 mm to 1.6 mm.

###### Optical fibers:

Quartz glass optical fiber (125  $\mu$ m in diameter) coated with silicone resin, having a diameter of 0.4 mm.

##### (2) Vibrating Condition

Having 10 to 20 layers of rings, each coil of the steel tube tested vibrated substantially equally at all points thereof.

Angle of vibration with respect to the horizontal plane of the coil: 15 degrees

Frequency of vibration: 20 Hz

Vertical component of total amplitude: 1.25 mm -1.55 mm

##### (3) Roll Feeder

When the optical fiber has been put in the steady passing condition, the drive roll of the roll feeder is stopped to function as an optical fiber support guide, with the hold-down roll retracted.

Under the above conditions, the optical fibers were smoothly passed through the steel tubes without any hitch. It was confirmed that the optical fiber were passed through the entire length of the steel tubes within a given length of time at a speed of 2 m/min. to 4 m/min. No difficulty was encountered even in passing an optical fiber through a tube whose diameter is as small as 2 mm or under and whose length is as large as about 10 km. Of course, the optical fibers passed through the steel

tubes suffered no degeneration.

To adjust the amount of surplus length and the magnitude of undulation, the feed roll feeder was always kept in motion. The speed of the drive roll was adjusted to control the feed of the optical fiber within the range of 40 % to 95 % of the conveyance speed owing to vibration. All this resulted in the attainment of appropriate surplus length and the suppression of undulation, thereby assuring a smooth travel of the optical fiber through the steel tube.

Though the threadlike piece was optical fibers in the preferred embodiments described herein, this invention is also applicable to the passing of other types of threadlike pieces, such as wires of such metals as copper and steel and of such nonmetallic substances as plastics. The number of threadlike piece passed through a tube is not limited to one. Multiple threadlike pieces may be passed through a tube if the inside diameter of the tube and the diameter of the threadlike piece permit. The tube need not be of steel, but may be of many other types of materials, such as aluminum and synthetic resins. Any other subsequent process, such as surface polishing, may be added as desired to the passing of the threadlike piece through the metal tube. Though not always needed to be so, the central axis of the coil of the tube should preferably coincide with the central axis of a helix and extend vertically. Furthermore, other combinations of the spools, feeders, inlet end holders and other means than those disclosed hereabove are also included within the scope of this invention.

#### Claims

1. A method of passing a threadlike piece through a tubular product which comprises the steps of forming a coil (6) of a tube, and vibrating the coil (6) of the tube while feeding a threadlike piece (7) through the inlet end (3) of the tube so that a given point of the tube (1) reciprocates along a helical path, characterized in that said feed of the threadlike piece (7) is made in such a manner that the inlet end (3) of the tube does not diametrically move a portion of the threadlike piece (7) upstream of and close to the inlet end of the tube.

2. A method of passing a threadlike piece through a tubular product according to claim 1, characterized in that said motion of the threadlike piece (7) is prevented by fastening a point (4) of the tube near the inlet end thereof to keep the inlet end (3) of the tube at a standstill.

3. A method of passing a threadlike piece through a tubular product according to claim 1, characterized in that said motion of the threadlike



piece (7) is prevented by fastening a point (4) of the tube near the inlet end (3) thereof so that the inlet end (3) of the tube is allowed to move longitudinally, but not diametrically.

4. A method of passing a threadlike piece through a tubular product according to claim 1, characterized in that said motion of the threadlike piece (7) is prevented by feeding the threadlike piece (7) to the inlet end (3) of the tube through an upward opening of a guide (140) that extends substantially horizontally and is connected to the inlet end (3) of the tube so as to vibrate together with the coil (6) of the tube.

5. A method of passing a threadlike piece through a tubular product according to any of claims 1 to 3, characterized in that the threadlike piece (7) is fed to the inlet end (3) of the tube whose lead-in section (2) is separated from a coil (6) thereof and curved upright.

6. A method of passing a threadlike piece through a tubular product according to any of claims 1 to 4, characterized in that a coil (9) of the threadlike piece (7) is formed and the threadlike piece (7) is pulled out therefrom along the axis of the coil and fed to the tube (1) by said conveying force produced by vibration acting on the threadlike piece (7) in the tube (1).

7. A method of passing a threadlike piece through a tubular product according to any of claims 1 to 3 and 5, characterized in that the threadlike piece (7) is sent to the inlet end (3) of the tube by means of a feeder (55, 86, 110) disposed near the inlet end (3) of the tube at least during the initial stage of passing.

8. A method of passing a threadlike piece through a tubular product according to any of claims 1 to 3 and 5, characterized in that the threadlike piece (7) is positively sent forward in such a manner as to follow the rate of said conveyance produced by vibration.

9. A method of passing a threadlike piece through a tubular product according to any of claims 1 to 3 and 5, characterized in that the feed rate of the threadlike piece (7) is controlled upstream of the inlet end (3) of the tube so that the passing speed of the threadlike piece (7) is determined by the feed rate thereof.

10. A method of passing a threadlike piece through a tubular product according to claim 9, characterized in that the threadlike piece (7) is passed into the tube at the running speed of a feeder (55, 86, 110) disposed near the inlet end (3) of the tube for pushing the threadlike piece (7) therein.

11. A method of passing a threadlike piece through a tubular product according to claim 9 or 10, characterized in that the feed rate of the thread-

like piece (7) is controlled so that the feed rate thereof to the inlet end (3) of the tube is kept below the speed of conveyance by vibration.

12. A method of passing a threadlike piece through a tubular product which comprises forming a coil (6) of a tube, forming a coil (9) of a threadlike piece, and vibrating the coil (6) of tube so that a given point of the tube reciprocates along a helical path, characterized in that the threadlike piece (7) is pulled out from the coil along the axis thereof and fed into the tube (1).

13. A method of passing a threadlike piece through a tubular product according to claim 12, characterized in that the threadlike piece (7) is pulled out from a coil thereof along the axis thereof and fed into the tube (1) by conveying force produced by vibration acting on the threadlike piece (7) in the tube (1).

14. A method of passing a threadlike piece through a tubular product according to claim 12 or 13, characterized in that the threadlike piece (7) is pulled out from a coil thereof along the axis thereof and fed into the tube (1) by means of a feeder (55, 86, 110).

15. A method of passing a threadlike piece through a tubular product according to any of claims 12 to 14, characterized in that a reversed twist is given to the threadlike piece (7) being formed into a coil (9) in order to offset a twist that occurs about the axis of the threadlike piece when the threadlike piece (7) is pulled out of the coil (9) thereof.

16. A method of passing a threadlike piece through a tubular product according to any of claims 12 to 15, characterized in that the threadlike piece (7) is fed to the inlet end (3) of the tube whose lead-in section (2) is separated from a coil (6) thereof and curved upright.

17. A method of passing a threadlike piece through a tubular product according to any of claims 12 to 16, characterized in that a long enough portion of the threadlike piece (7) to produce a large enough conveying force to pull the threadlike piece (7) into the tube (1) is preliminarily inserted into the tube (1) through the inlet end (3) thereof.

18. A method of passing a threadlike piece through a tubular product according to any of claims 12 to 17, characterized in that the feed rate of the threadlike piece (7) is controlled so that the speed with which the threadlike piece (7) is fed to the inlet end (3) of the tube is kept below the speed of conveyance produced by vibration.

19. A method of passing a threadlike piece through a tubular product according to any of claims 14 to 18, characterized in that the threadlike



piece (7) is positively sent forward in such a manner as to follow the rate of said conveyance produced by vibration.

20. A method of passing a threadlike piece through a tubular product which comprises forming a coil (6) of tube and vibrating the coil (6) of tube while feeding a threadlike piece (7) through the inlet end (3) of the tube so that a given point of the tube (1) reciprocates along a helical path, characterized in that the feed rate of the threadlike piece (7) is controlled upstream of the inlet end (3) of the tube so that the passing speed of the threadlike piece (7) is determined by the feed rate thereof.

21. A method of passing a threadlike piece through a tubular product according to claim 20, characterized in that the threadlike piece (7) is fed to the inlet end (3) of the tube whose lead-in section (2) is separated from a coil (6) thereof and curved upright.

22. A method of passing a threadlike piece through a tubular product according to claim 20 or 21, characterized in that the threadlike piece (7) is sent to the inlet end (3) of the tube by means of a feeder (55, 86, 110) disposed near the inlet end (3) of the tube at least during the initial stage of passing.

23. A method of passing a threadlike piece (7) through a tubular product according to any of claims 20 to 22, characterized in that the threadlike piece (7) is passed into the tube (1) at the running speed of a feeder (55, 86, 110) disposed near the inlet end (3) of the tube (1) for pushing the threadlike piece (7) therein.

24. A method of passing a threadlike piece (7) through a tubular product according to any of claims 20 to 23, characterized in that the feed rate of the threadlike piece (7) is controlled so that the speed with which the threadlike piece (7) is fed to the inlet end (3) of the tube (1) is kept below the speed of conveyance produced by vibration.

25. A method of passing a threadlike piece (7) through a tubular product according to claim 24, characterized in that the feed rate of the threadlike piece (7) is between 40% and 95 % of the rate of conveyance produced by vibration.

26. An apparatus for passing a threadlike piece (7) through a tubular product which comprises means for supporting a coil (6) of a tube (1) into which a threadlike piece (7) is to be passed, means for vibrating said means (27) to support the coil (6) of the tube in such a manner that a given point of the tube (1) reciprocates along a helical axis, and means for feeding the threadlike piece (7) through the inlet end (3) of the tube (1) whose coil is being vibrated, an intermittent conveying force the inner wall of the tube (1) exerts in the direction of the circumference of the coil on the threadlike piece (7) in the tube (1) causing the threadlike piece (7) to

advance through the tube (1), characterized by means (57, 74, 92, 101, 124) for holding a point (4) of the tube near the inlet end (3) thereof so that a portion of the threadlike piece (7) upstream of and close to the inlet end (3) of the tube is not diametrically moved by the inlet end (3) of the tube.

27. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 26, characterized in that the means (27) for supporting the coil (6) of the tube comprises a cylindrical member.

28. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 26 or 27, characterized in that the means for holding the point (4) of the tube (1) near the inlet end (3) thereof comprises means (57, 74, 92) that fastens the inlet end (3) of the tube (1) in such a manner that the inlet end (3) of the tube (1) is at a standstill.

29. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 26 or 27, characterized in that the means for holding the point (4) of the tube near the inlet end thereof comprises means (101, 124) that fastens the point (4) of the tube near the inlet end thereof in such a manner that the inlet end (3) is allowed to move longitudinally while being prohibited from moving diametrically.

30. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 26 to 29, characterized in that the means (101) for holding the point (4) of the tube near the inlet end thereof comprises a stand (102), a casing (103) supported by the stand (102) and pairs of guide rolls (104) rotatably supported by the casing (103), the pairs of guide rolls (104) to hold therebetween the point (4) of the tube near the inlet end thereof being alternately disposed in a vertical and a horizontal position.

31. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 26 or 29, characterized in that the means (124) for holding the point (4) of the tube near the inlet end thereof comprises a stand (129), an outer cylinder (125) supported by the stand (129), an intermediate cylinder (126) passed through the outer cylinder (125), an inner cylinder (127) passed through the intermediate cylinder (126), the inner cylinder (127) being adapted to receive and fasten the point (4) of the tube near the inlet end thereof passed therein, and a large number of balls (130) rotatably attached to the intermediate cylinder (126).

32. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 26 to 31, characterized in that the means for

feeding the threadlike piece (7) comprises a rotatably supported spool (34) carrying the threadlike piece (7) wound therearound.

33. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 32, characterized in that the means (38) for driving the spool (34) is provided.

34. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 26 to 33, characterized in that the means for feeding the threadlike piece (7) comprises a stationary bobbin (66) carrying the threadlike piece (7) wound therearound.

35. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 26 to 34, characterized in that the means for feeding the threadlike piece (7) comprises a container (77) to hold a coil (9) of the threadlike piece (7) that opens upward.

36. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 26 to 35, characterized in that the means (33, 66, 77) for feeding the threadlike piece (7) is disposed above a coil (6) of the tube (1) and has means (68, 135, 138) for guiding the threadlike piece (7), the guiding means (68, 135, 138) comprising a vertical guide (71) interposed between the threadlike piece feeding means (33, 66, 77) and the inlet end (3) of the tube (1).

37. An apparatus for passing a threadlike piece (7) through a tubular according to any of claims 26 to 36, characterized in that a feeder (55, 86, 110) for exerting a longitudinal force on the threadlike piece (7) is disposed between the threadlike piece feeding means (33, 66, 77) and means (57, 74, 92, 101, 124) for holding the point (4) of the tube near the inlet end thereof.

38. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 37, characterized in that the feeder (55, 86, 110) is adapted to positively send the threadlike piece (7) to the inlet end (3) of the tube (1).

39. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 37 or 38, characterized in that the feeder (55, 86, 110) exerts a braking force on the threadlike piece (7) entering the inlet end (3) of the tube (1).

40. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 37 to 39, characterized in that a feeder (153) to pull out the threadlike piece (7) from the threadlike piece feeding means (33, 66, 77), threadlike piece feed condition sensing means (155) disposed between the feeder (55, 86, 110) and threadlike piece pull-out feeder (153) and means (52) to control the speed of the pull-out speed of the feeder (153) on the basis of a signal from the threadlike piece feed condition sensing

means (155) are provided between said threadlike piece feeding means (33, 66, 77) and said feeder (55, 86, 110).

41. An apparatus for passing a threadlike piece (7) through a tubular product which comprises means (27) for supporting a coil (6) of a tube (1) into which a threadlike piece (7) is to be passed, means (33, 66, 77) for feeding the threadlike piece (7) to the inlet end (3) of the tube, and means (21, 22) for vibrating said means (27) for supporting the coil (6) of the tube in such a manner that a given point of the tube (1) reciprocates along a helical axis, the threadlike piece (7) being fed through the inlet end (3) of the tube (1) whose coil (6) is being vibrated, and an intermittent conveying force the inner wall of the tube (1) exerts in the direction of the circumference of the coil on the threadlike piece (7) in the tube (1) causing the threadlike piece (7) to advance through the tube (1), characterized in that said threadlike piece feeding means comprises means (77) for holding a coil (9) of the threadlike piece (7) in such a manner as to permit the threadlike piece (7) to be pulled out along the axis of the coil.

42. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 41, characterized in that the means for supporting the coil (6) of the tube comprises a cylindrical member (27).

43. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 41 or 42, characterized in that the means for holding the coil (9) of the threadlike piece (7) comprises a stationary bobbin (66) carrying the threadlike piece (7) wound therearound.

44. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 41 to 43, characterized in that the means for holding the coil (9) of the threadlike piece (7) comprises a container (77) to hold a coil (9) of the threadlike piece (7) that opens upward.

45. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 41 to 44, characterized in that the means (33, 66, 77) for holding the coil (9) of the threadlike piece (7) is disposed above a coil (6) of the tube (1) and has means (68, 135, 138) for guiding the threadlike piece (7), the guiding means comprising a vertical guide (71) and being interposed between the means (33, 66, 77) for holding the coil (9) of the threadlike piece and the inlet end (3) of the tube (1).

46. An apparatus for passing a threadlike piece (7) through a tubular product which comprises means (27) for supporting a coil (6) of a tube (1) into which a threadlike piece (7) is to be passed means (33, 66, 77) for feeding the threadlike piece (7) to the inlet end (3) of the tube (1), and means



(21, 22) for vibrating said means (27) for supporting the coil (6) of the tube in such a manner that a given point of the tube (1) reciprocates along a helical path, an intermittent conveying force the inner wall of the tube (1) exerts in the direction of the circumference of the coil on the threadlike piece (7) in the tube (1) causing the threadlike piece (7) to advance through the tube (1), characterized by means (34, 38, 40, 55, 86, 110) for controlling the feed rate of the threadlike piece (7) by adjusting the force working on the threadlike piece (7) in the longitudinal direction thereof upstream of the inlet end (3) of the tube (1) so that the passing speed of the threadlike piece (7) is determined by the feed rate thereof.

47. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 46, characterized in that the means for supporting the coil (6) of the tube comprises a cylindrical member (27) 48. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 46 or 47, characterized in that the means for feeding the threadlike piece (7) comprises a rotatably supported spool (34) carrying the threadlike piece (7) wound therearound.

49. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 48, characterized in that means (38) for driving the spool (34) is provided.

50. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 46 to 49, characterized in that the means for feeding the threadlike piece (7) comprises a stationary bobbin (66) carrying the threadlike piece (7) wound therearound.

51. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 46 to 50, characterized in that the means for feeding the threadlike piece (7) comprises a container (77) to hold a coil of the threadlike piece (7) that opens upward.

52. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 46 to 51, characterized in that the means (33, 66, 77) for feeding the threadlike piece (7) is disposed above a coil (6) of the tube (1) and has means (68, 135, 138) for guiding the threadlike piece (7) disposed between the means (33, 66, 77) for feeding the threadlike piece feeding (7) and the inlet end (1) of the tube (1), the guiding means comprising a vertical guide (71).

53. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 46 to 52, characterized in that the feed rate control means comprises means for positively feeding the threadlike piece (7) to the inlet end (3) of the tube (1).

54. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 46 to 53, characterized in that the feed rate control means comprises means for exerting a braking force on the threadlike piece (7) entering the inlet end (3) of the tube (1).

55. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 46 to 54, characterized in that the feed rate control means comprises an electromagnetic feeder (55).

56. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 46 to 55, characterized in that the feed rate control means comprises a belt feeder (86).

57. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 46 to 56, characterized in that the feed rate control means comprises a roll feeder (110).

58. An apparatus for passing a threadlike piece (7) through a tubular product according to any of claims 46 to 57, characterized by means (47) for sensing a difference between the passing speed and feed rate of the threadlike piece (7) disposed between the feed rate control means (34, 38, 55, 86, 110) and the inlet end (3) of the tube (1) and means (52, 115) for controlling the feed rate control means (34, 38, 55, 86, 110) on the basis of a signal from said speed difference sensing means (47).

59. An apparatus for passing a threadlike piece (7) through a tubular product according to claim 58, characterized in that the speed difference sensing means (47) comprises an image sensor (49) to detect the vertical motion of sagging of the threadlike piece (7).

60. An apparatus for passing a threadlike piece (7) through a tubular product which comprises a base (11), a vibrating table (14) mounted on the base (11) with a spring (18) disposed therebetween, vibrating motors (21, 22) having a weights (24) disposed eccentric to the axis of rotation and attached to the vibrating table (14), the vibrating motors (21, 22) vibrating the vibrating table (14) so that a given point thereof reciprocates along a helix having a vertical central axis, a bobbin (27) to carry a coil of the tube (1) wound therearound fastened on the vibrating table (14) so that the axis of the bobbin coincides with the central axis of said helix, a spool (34) disposed beside the bobbin (27) to carry the threadlike piece (7) wound therearound, the spool (34) feeding the threadlike piece (7) into the tube (1) wound around the bobbin (27) through the inlet end (3) thereof, driving means (38) to rotate the spool (34) in such a manner as to feed the threadlike piece (7) wound therearound into the tube (1) wound around the bobbin (27) through the inlet end (3) thereof, a sensor (49) to detect a difference between the passing speed and the feed



rate of the threadlike piece (7), and means (52) for controlling said spool driving means (38) on the basis of the speed difference detected by the sensor (49), characterized by means (57, 74, 92, 101, 124) for holding the point (4) of the tube near the inlet end thereof in the lead-in section (2) of the tube (1) unwound from the bobbin (27) so that a portion of the threadlike piece (7) upstream of and close to the inlet end (3) of the tube (1) is not diametrically moved by the inlet end (3) of the tube (1).

61. An apparatus for passing a threadlike piece (7) through a tubular product which comprises a base (11), a vibrating table (14) mounted on the base (11) with a spring (12) disposed therebetween, a vibrating motors (21, 22) having weights disposed eccentric to the axis of rotation and attached to the vibrating table (14), the vibrating motors (21, 22) vibrating the vibrating table (14) so that a given point thereof reciprocates along a helix having a vertical central axis, a bobbin (27) to carry a coil of the tube (1) wound therearound fastened on the vibrating table (14) so that the axis of the bobbin (27) coincides with the central axis of said helix, means (77) disposed beside the bobbin (27) for feeding the threadlike piece (7) to the inlet end (3) of the tube, which comprises a container (77) holding a coil (9) of the threadlike piece (7) and opening upward, the threadlike piece (7) being pulled out upward along the axis of the coil, a roll feeder (110) having a driven roll (112) and disposed between the bobbin (27) and the threadlike piece feeding means (77), a sensor (49) disposed on the exit side of the roll feeder (110) to sense a difference between the passing speed of the threadlike piece (7) and the feed rate of the roll feeder (110), means (115) for controlling the rotating speed of the driven roll (112) of the roll feeder (110) on the basis of the speed difference detected by the sensor (49), means (57, 74, 92, 101, 124) for holding the point (4) near the inlet end of the tube in the lead-in section (2) of the tube (1) unwound from the bobbin (27) so that a portion of the threadlike piece (7) upstream of and close to the inlet end (3) of the tube (1) is not diametrically moved by the inlet end (3) of the tube (1).

62. An apparatus for passing a threadlike piece (7) through a tubular product which comprises a base (11), a vibrating table (14) mounted on the base (11) with a spring (18) disposed therebetween, vibrating motors (21, 22) having weights disposed eccentric to the axis of rotation and attached to the vibrating table (14), the vibrating motors (21, 22) vibrating the vibrating table (14) so that a given point thereof reciprocates along a helix having a vertical central axis, a bobbin (27) to carry a coil of the tube (1) wound therearound fastened on the vibrating table (14) so that the axis of the

bobbin (27) coincides with the central axis of said helix, a spool (34) disposed above the bobbin (27) to carry a coil of the threadlike piece (7) wound therearound, the spool (34) feeding the threadlike piece (7) into the tube (1) wound around the bobbin (27) through the inlet end (3) thereof, driving means (38) to rotate the spool (34) in such a manner as to feed the threadlike piece (7) wound therearound into the tube (1) wound around the bobbin (27) through the inlet end (3) thereof, a sensor (49) to detect a difference between the passing speed and the feed rate of the threadlike piece (7), and means (52) for controlling the spool driving means (38) on the basis of the speed difference detected by the sensor (49), characterized by a guide tube (138) extending downward from the exit side of the sensor (49), and an intake guide (140) comprising a trumpet-shaped guide proper (141) extending substantially horizontally and fastened to the bobbin (27), the guide proper (14) having a smaller-diameter end connected to the inlet end (3) of the tube (1) and a slit (142) opening upward through which the threadlike piece (7) falling down from the guide tube (1) being led into the guide proper (141), the intake guide (140) being adapted to vibrate together with the bobbin (27) to exert on the threadlike piece (7) held therein a conveying force working in the direction of the inlet end (3) of the tube (1).

63. An apparatus for passing a threadlike piece (7) through a tubular product which comprises a base (11), a vibrating table (14) mounted on the base (11) with a spring (18) disposed therebetween, vibrating motors (21, 22) having weights (24) disposed eccentric to the axis of rotation and attached to the vibrating table (14), the vibrating motors (21, 22) vibrating the vibrating table (14) so that a given point thereof reciprocates along a helix having a vertical central axis, a bobbin (27) to carry a coil of the tube (1) wound therearound fastened on the vibrating table (14) so that the axis of the bobbin (27) coincides with the central axis of said helix, and means (77) disposed beside the bobbin (27) to feed the threadlike piece (7) to the inlet end (3) of the tube, characterized by the threadlike piece falling means (77) which comprises a container (77) holding a coil (9) of the threadlike piece (7) and opening upward, the threadlike piece (7) being pulled out upward along the axis of the coil and guide rolls (149, 150) disposed above the container (77) to lead the threadlike piece (7) pulled out of the container (77) to the inlet end (3) of the tube (1).

64. An apparatus for passing a threadlike piece (7) through a tubular product which comprises a base (11), a vibrating table (14) mounted on the base (11) with a spring (18) disposed therebetween, vibrating motors (21, 22) having weights

(24) disposed eccentric to the axis of rotation and attached to the vibrating table (14), the vibrating motors (21, 22) vibrating the vibrating table (14) so that a given point thereof reciprocates along a helix having a vertical central axis, a bobbin (27) to carry a coil of the tube (1) wound therearound fastened on the vibrating table (14) so that the axis of the bobbin (27) coincides with the central axis of said helix, and means (33, 66, 77) disposed beside the bobbin (27) for feeding the threadlike piece (7) to the inlet end (3) of the tube, characterized by the threadlike piece feeding means (77) which comprises a container (77) holding a coil (9) of the threadlike piece (7) and opening upward, the threadlike piece (7) being pulled out upward along the axis of the coil and a roll feeder (110) disposed between the bobbin (27) and the threadlike piece container (77) to lead the threadlike piece (7) pulled out of the container (77) to the inlet end (3) of the tube (1).

5

10

15

20

25

30

35

40

45

50

55



FIG. 1

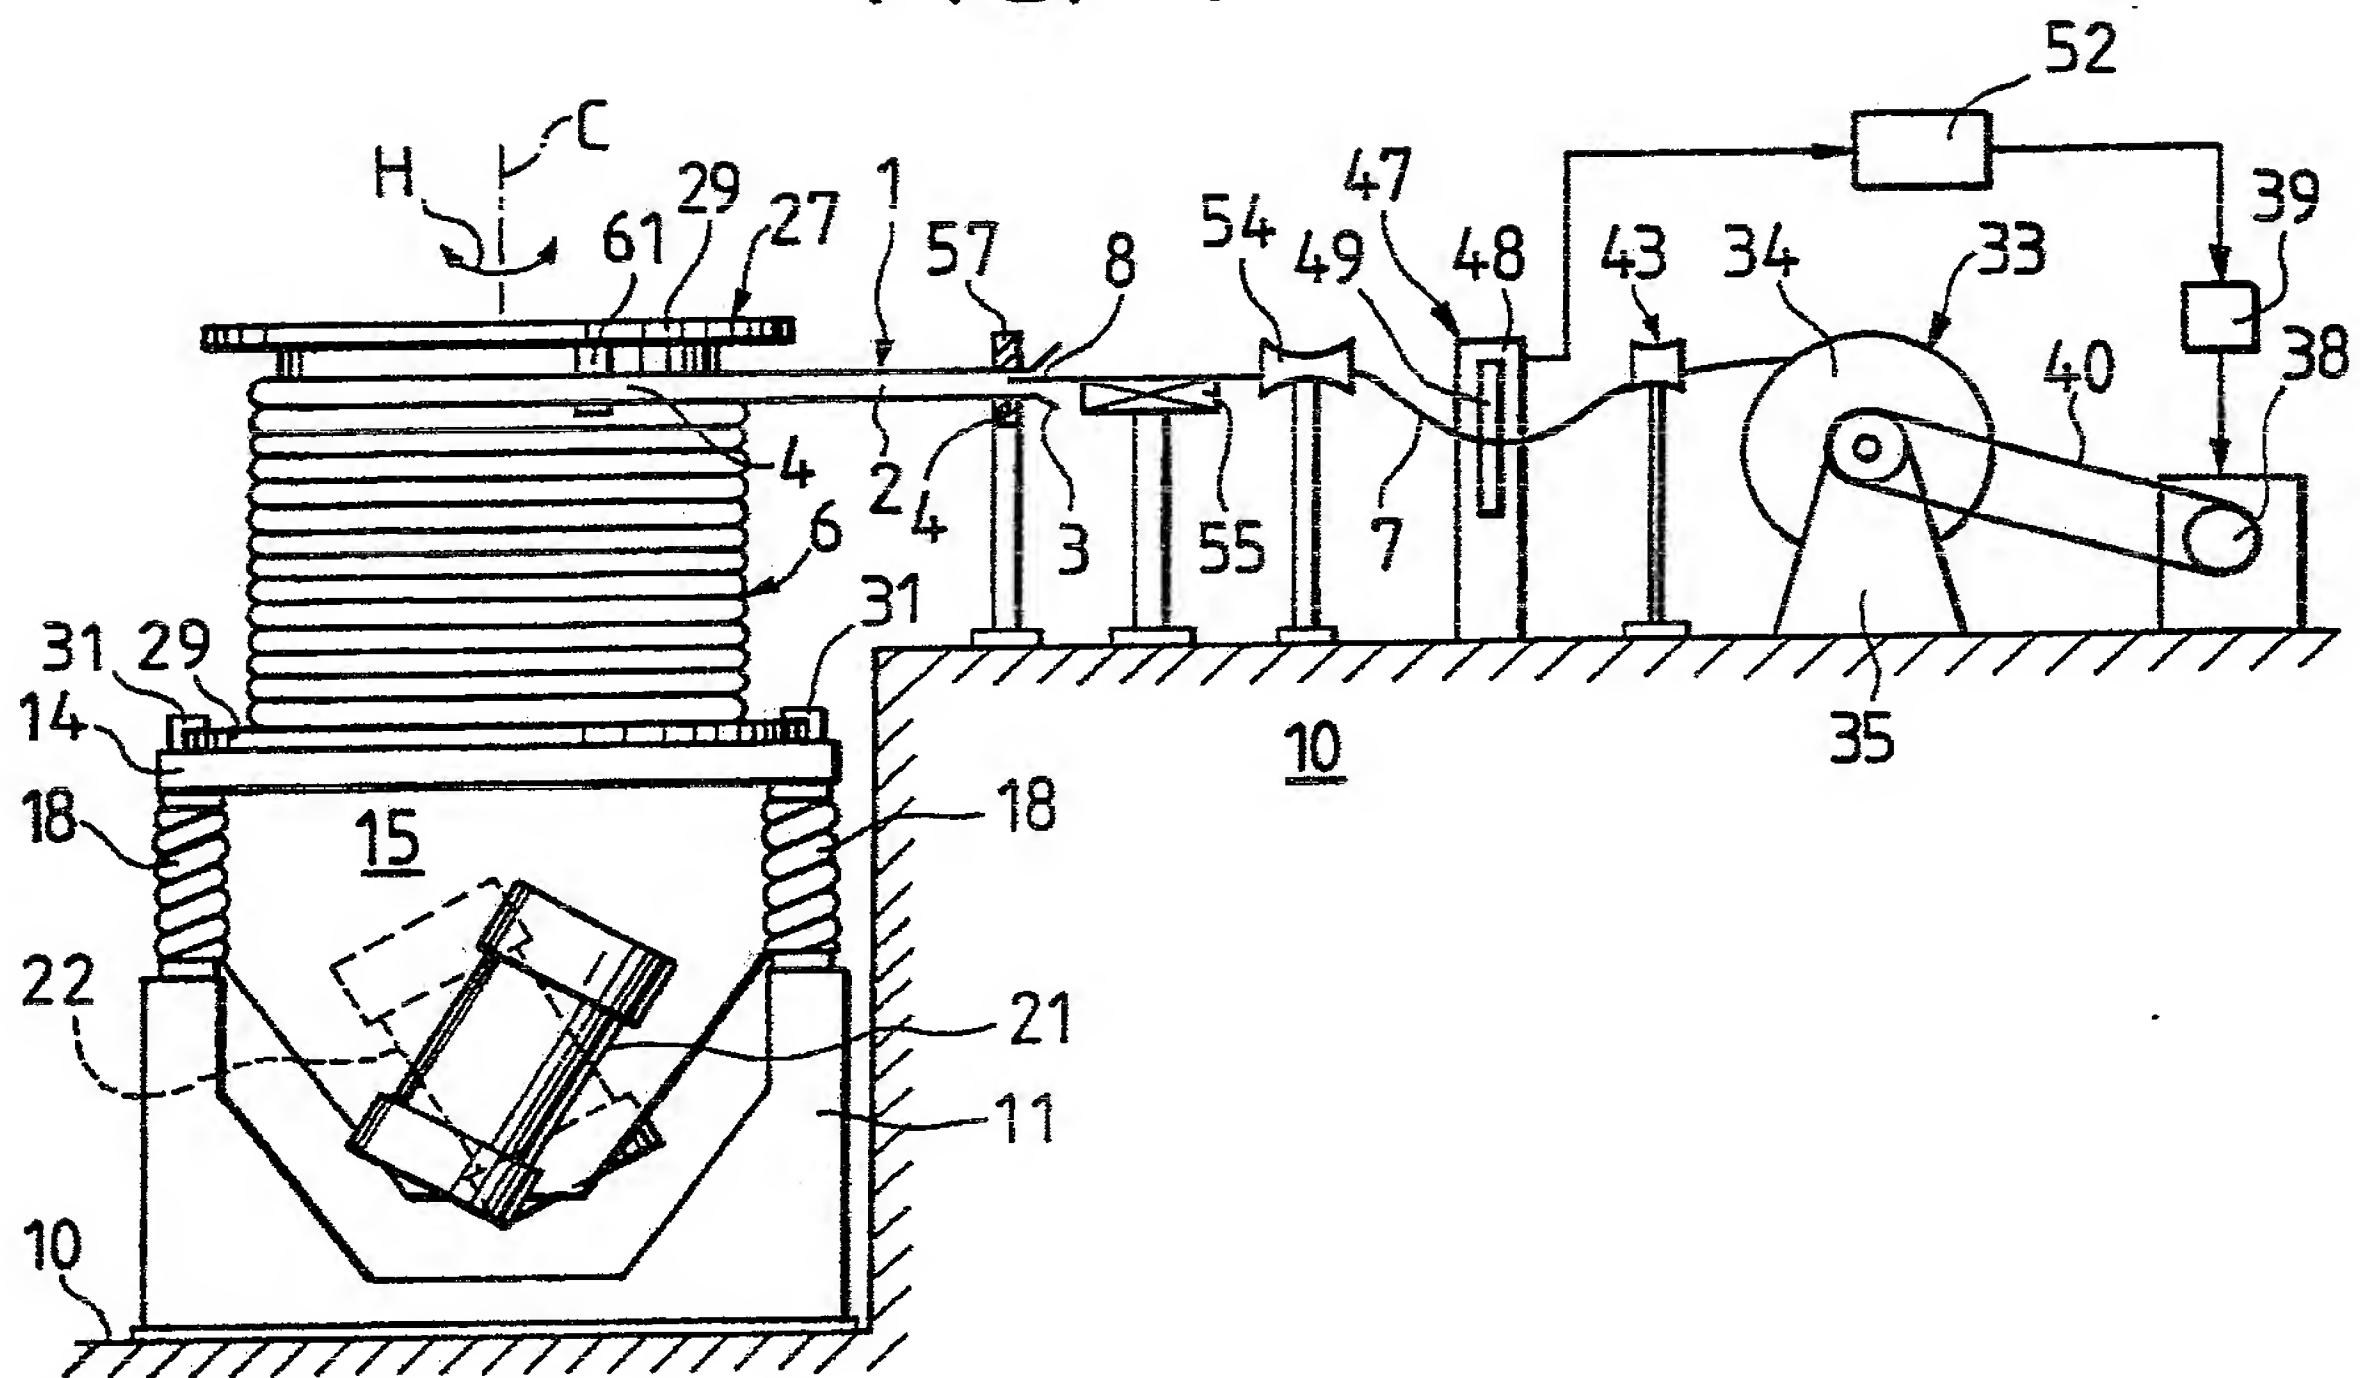


FIG. 2

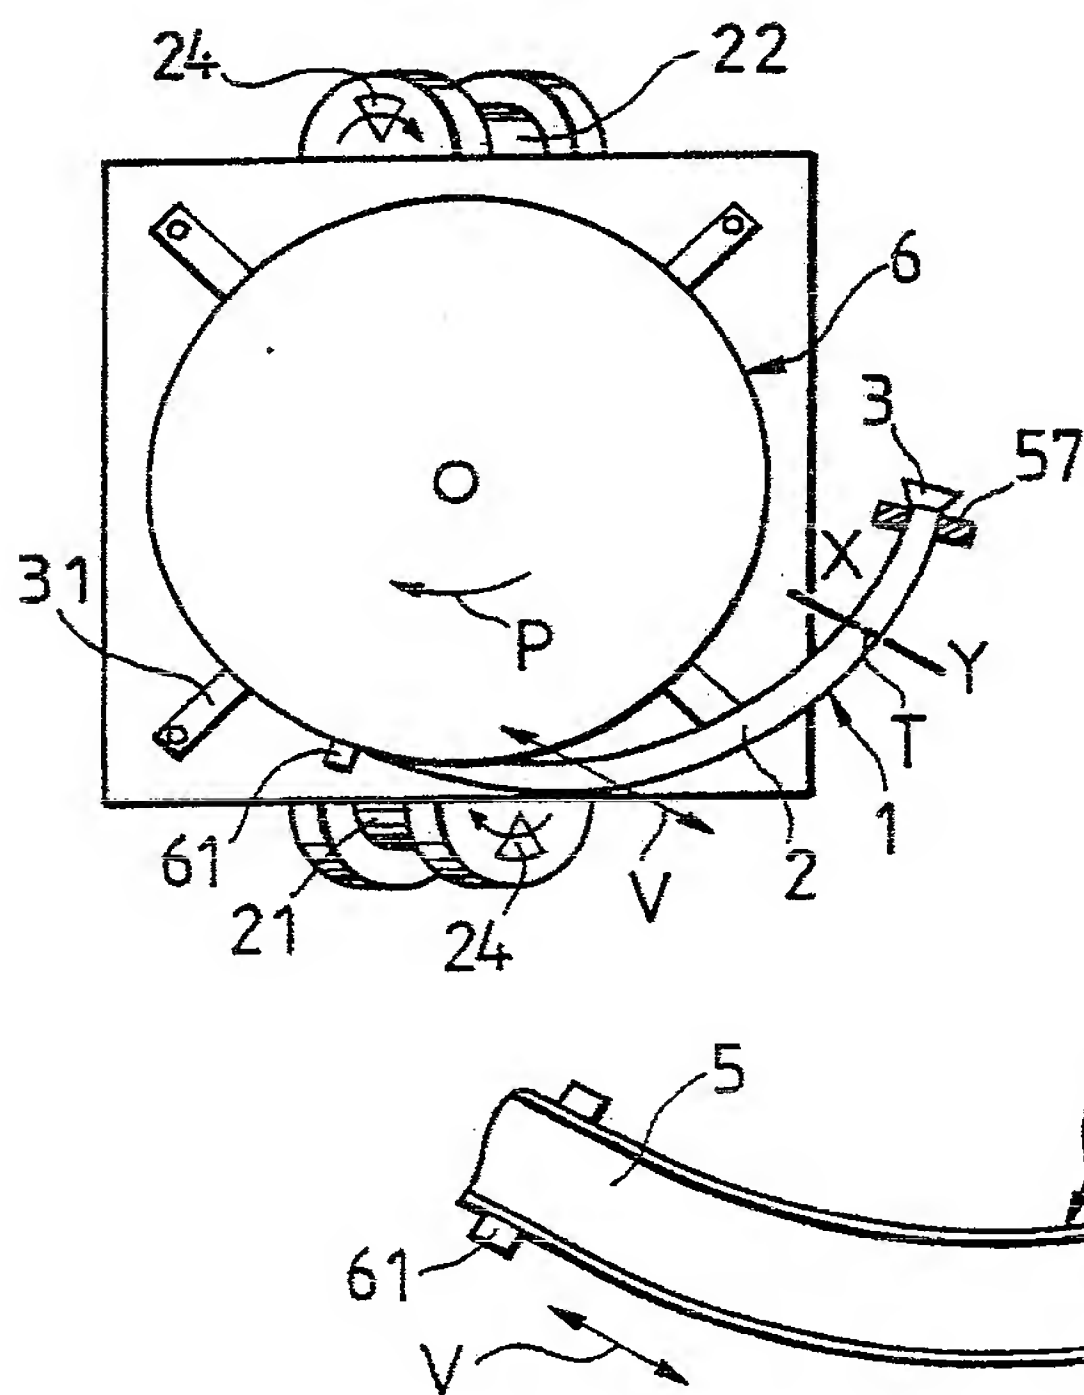
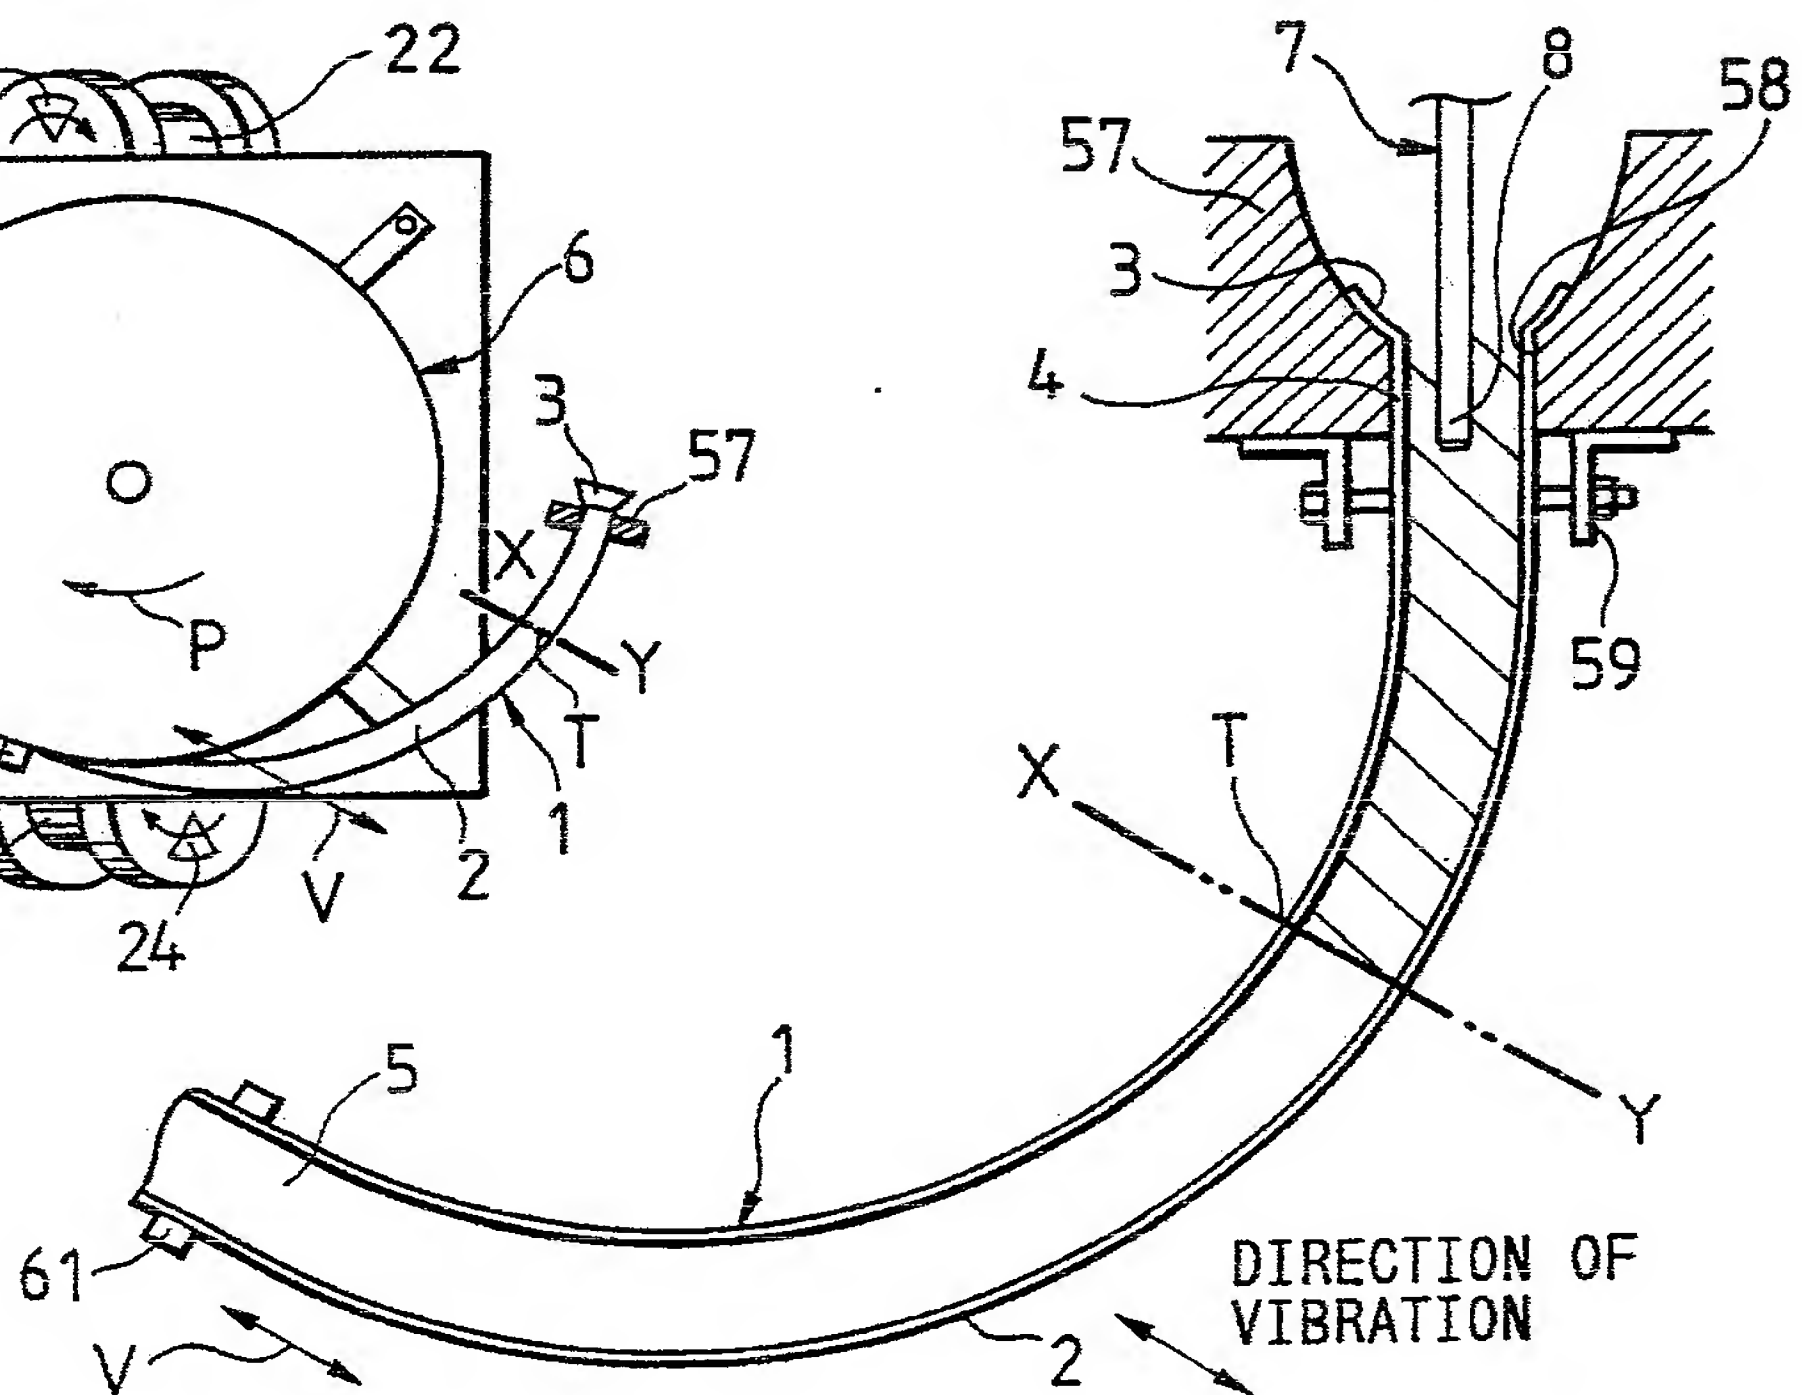


FIG. 3



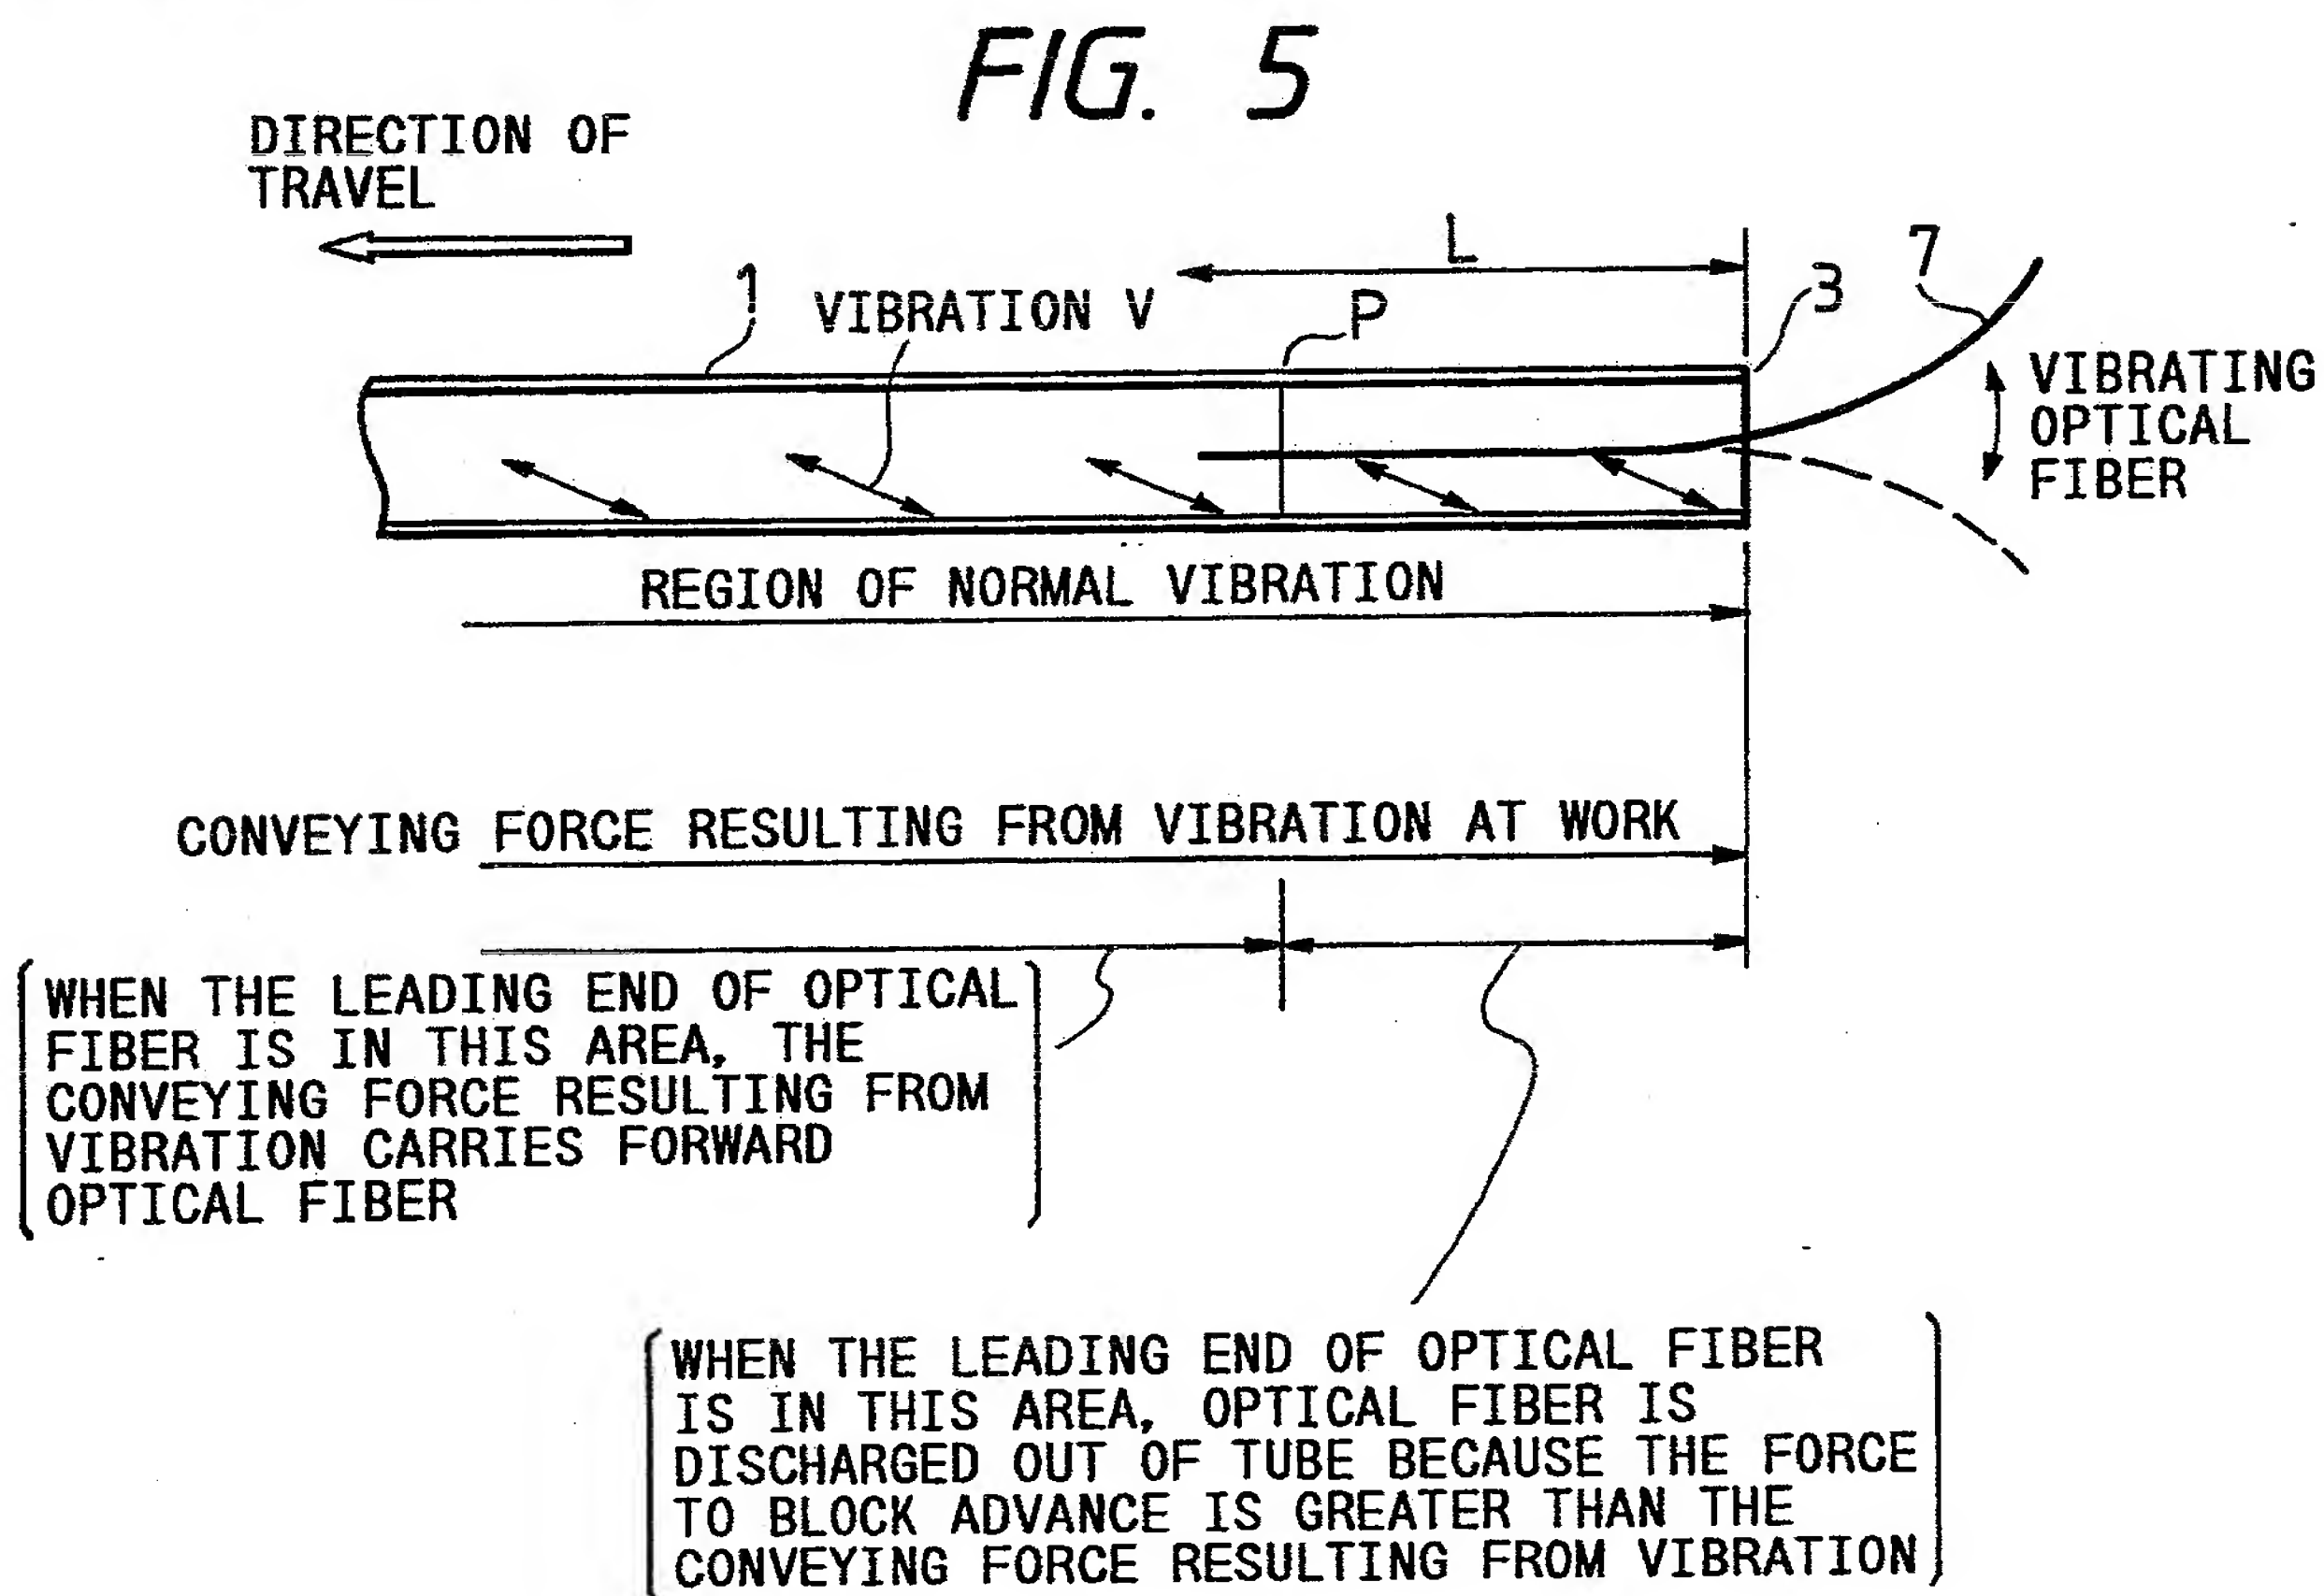
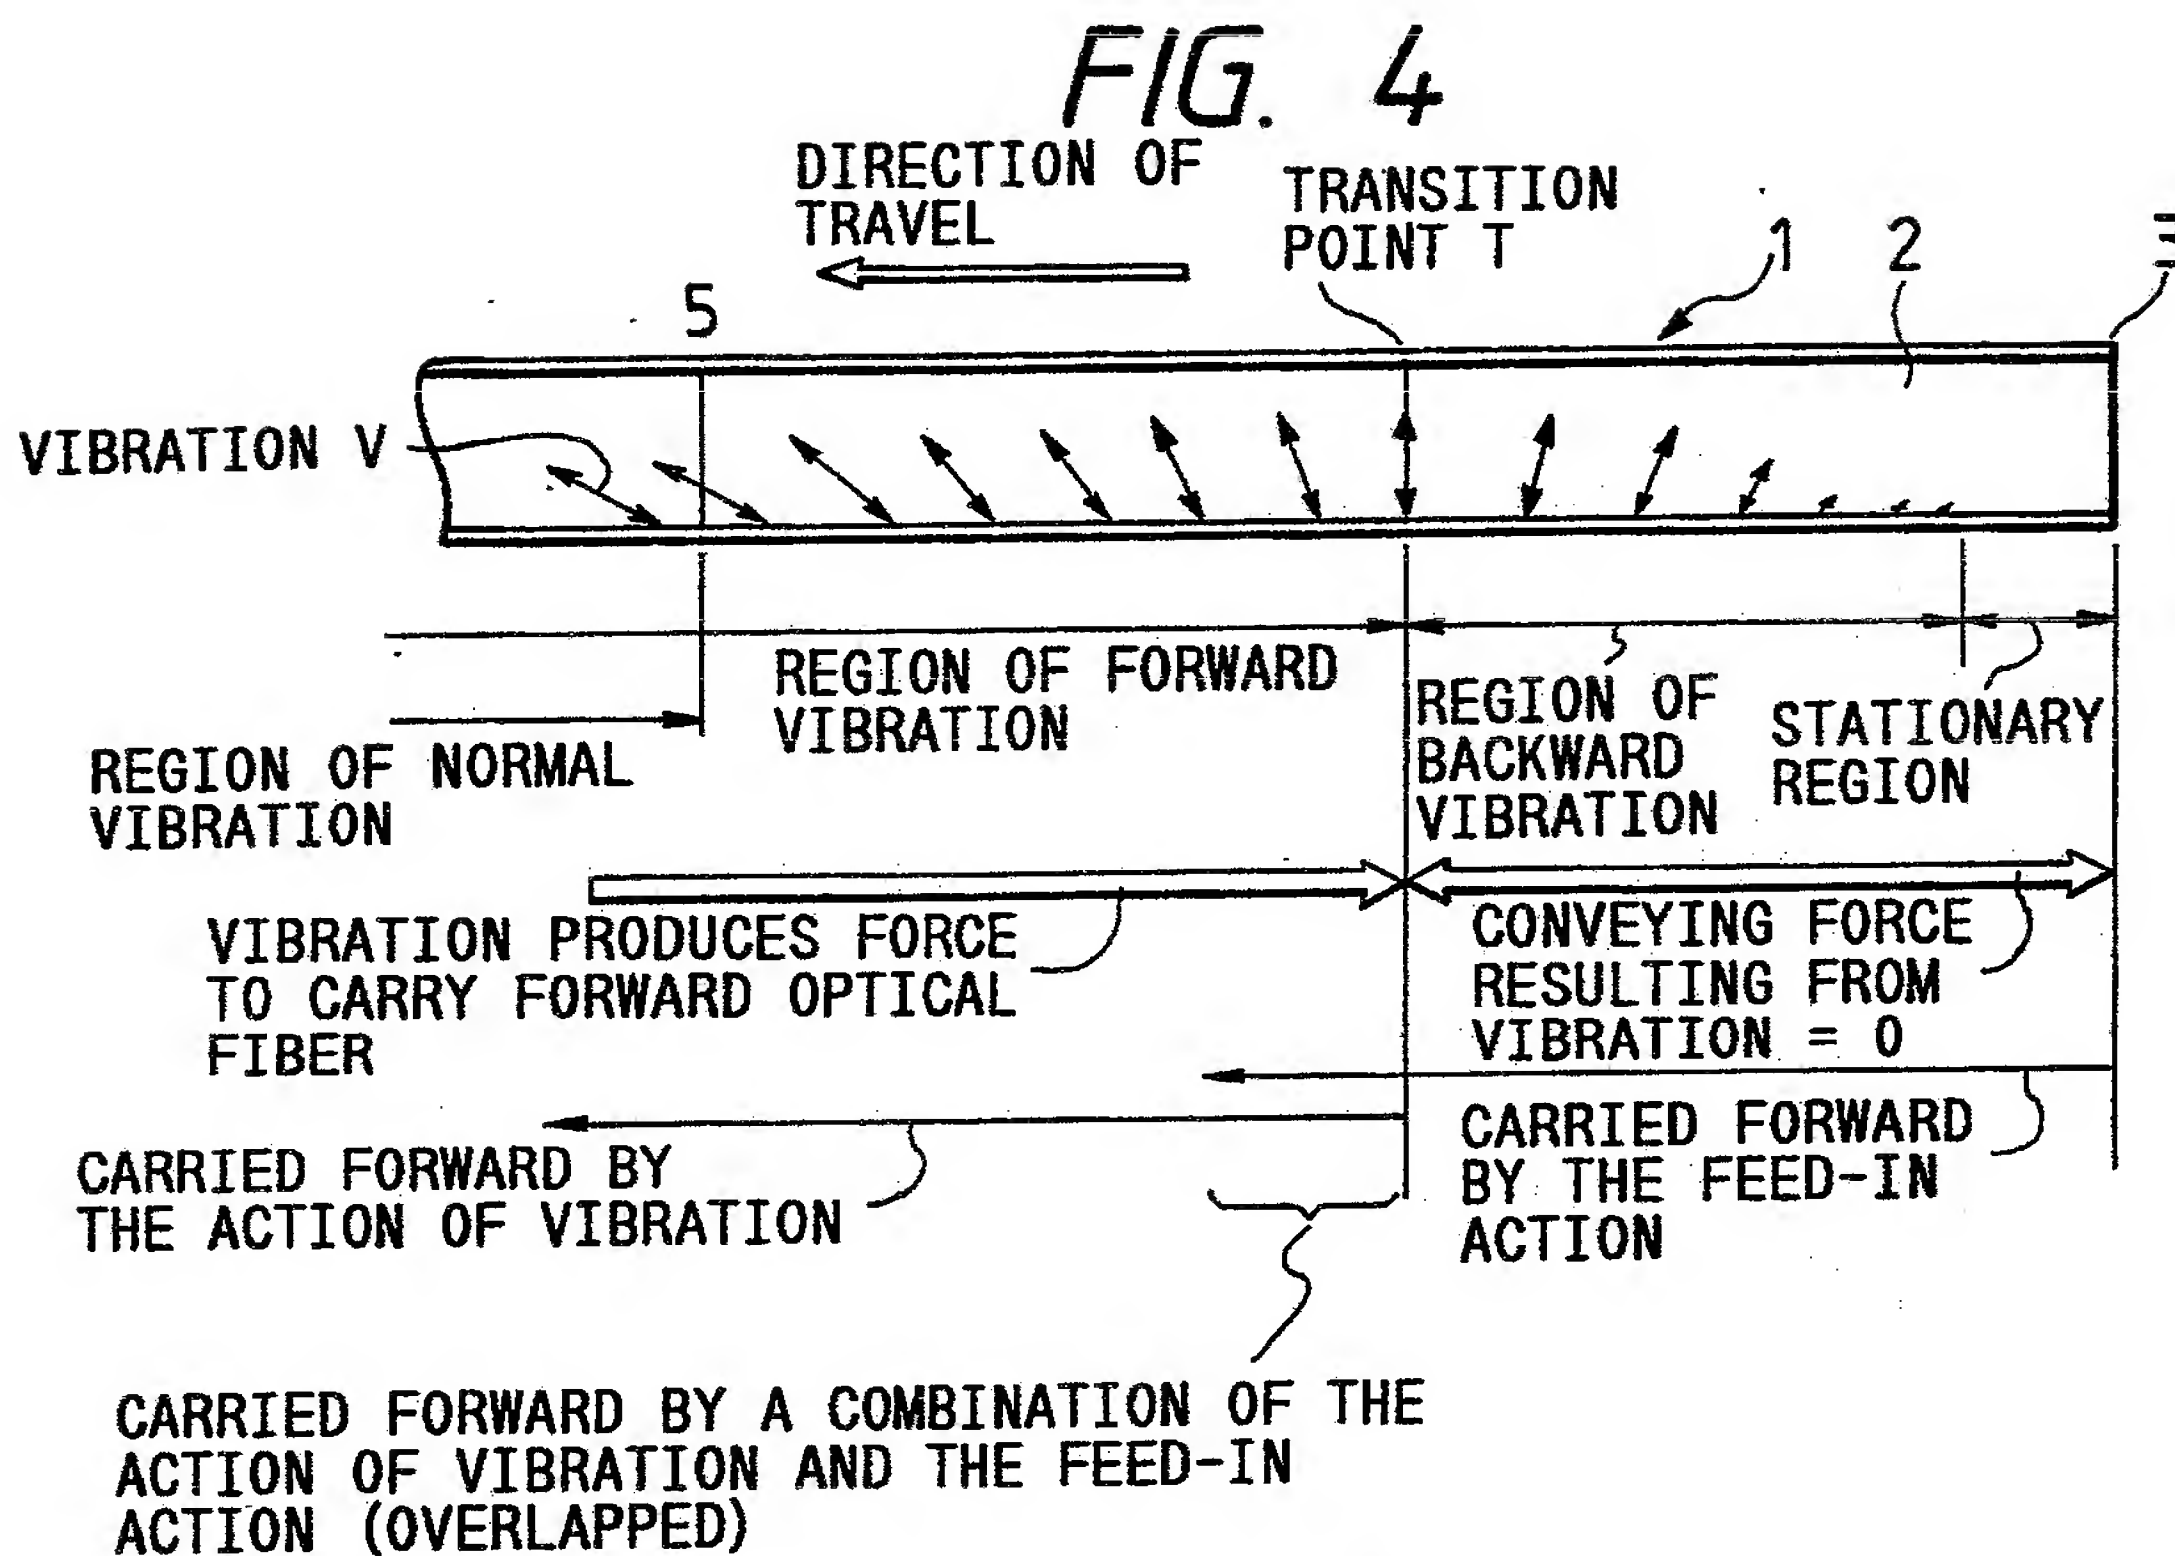






FIG. 8

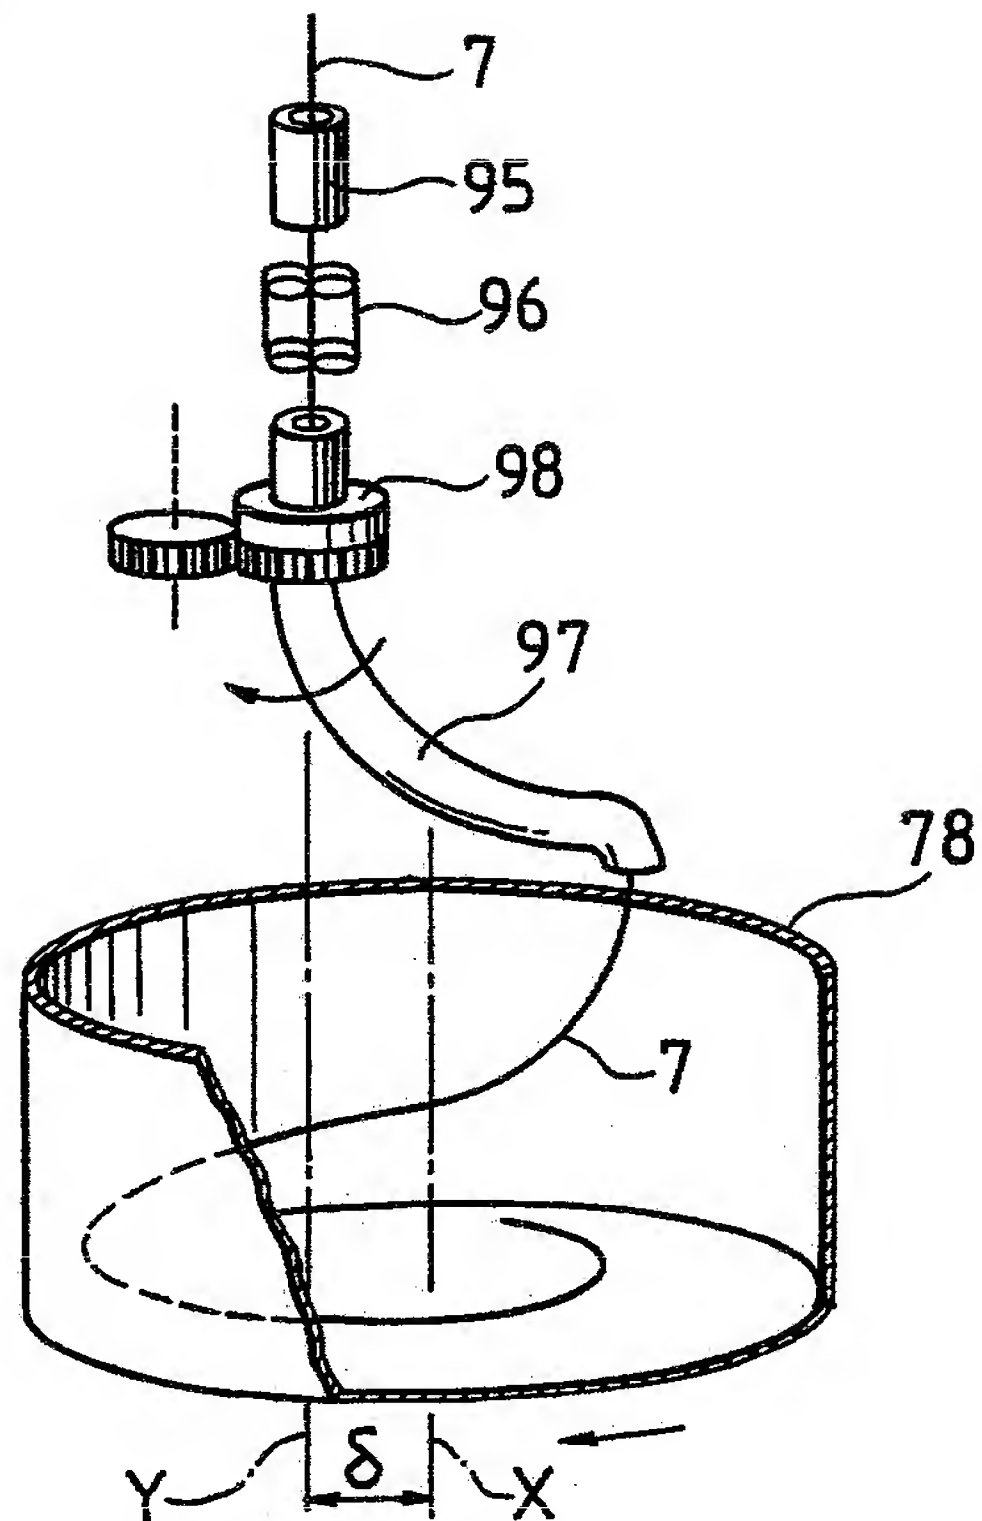


FIG. 9(a)

DIRECTION D IN WHICH OPTICAL FIBER IS CARRIED FORWARD

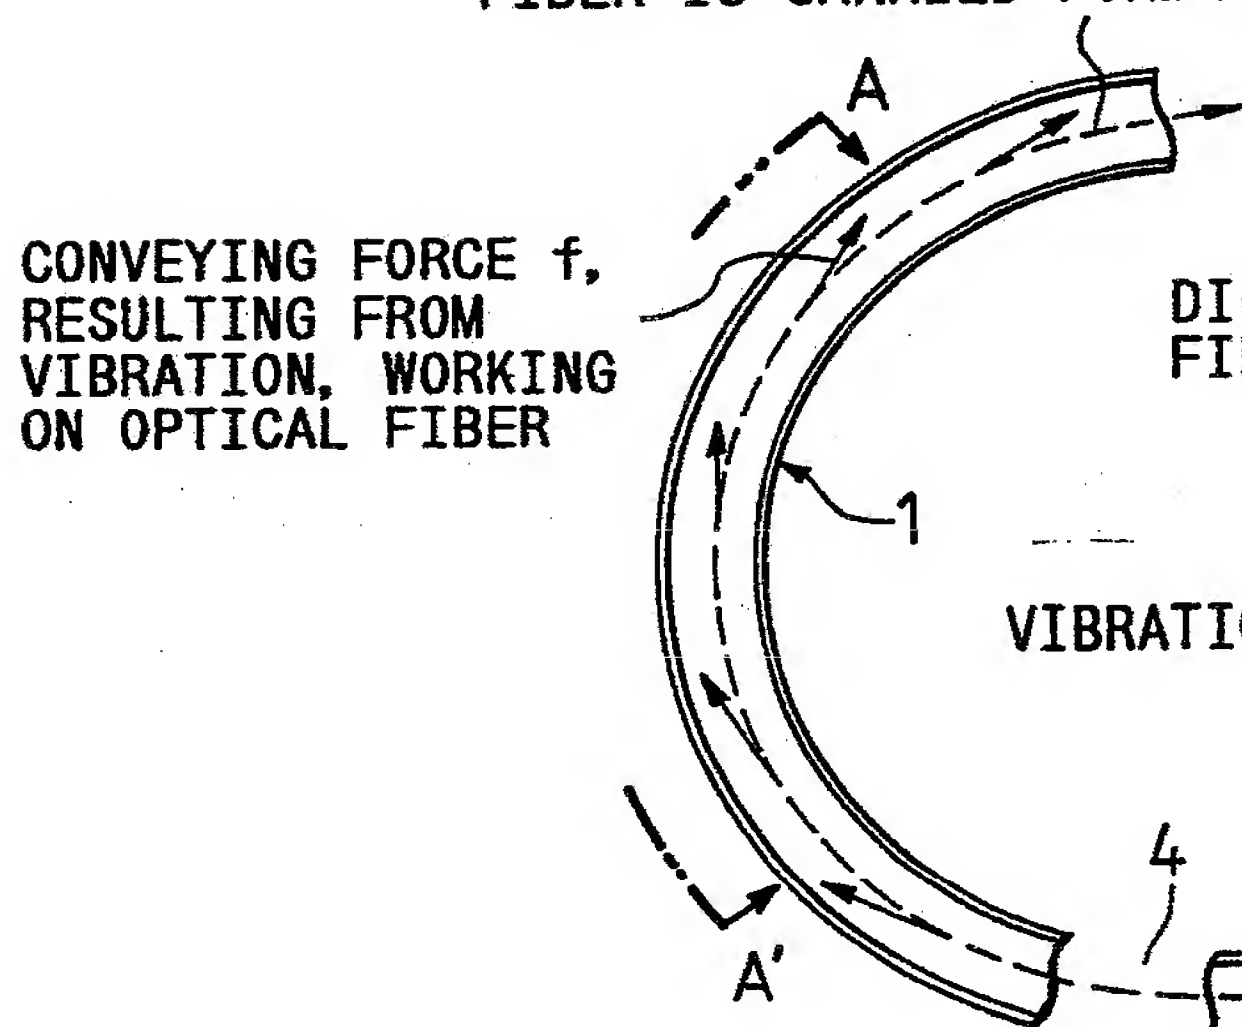


FIG. 9(b)

DIRECTION D IN WHICH OPTICAL FIBER IS CARRIED FORWARD

VIBRATION OF TUBE V

PUSHING FORCE F THE FEEDER EXERTS ON OPTICAL FIBER

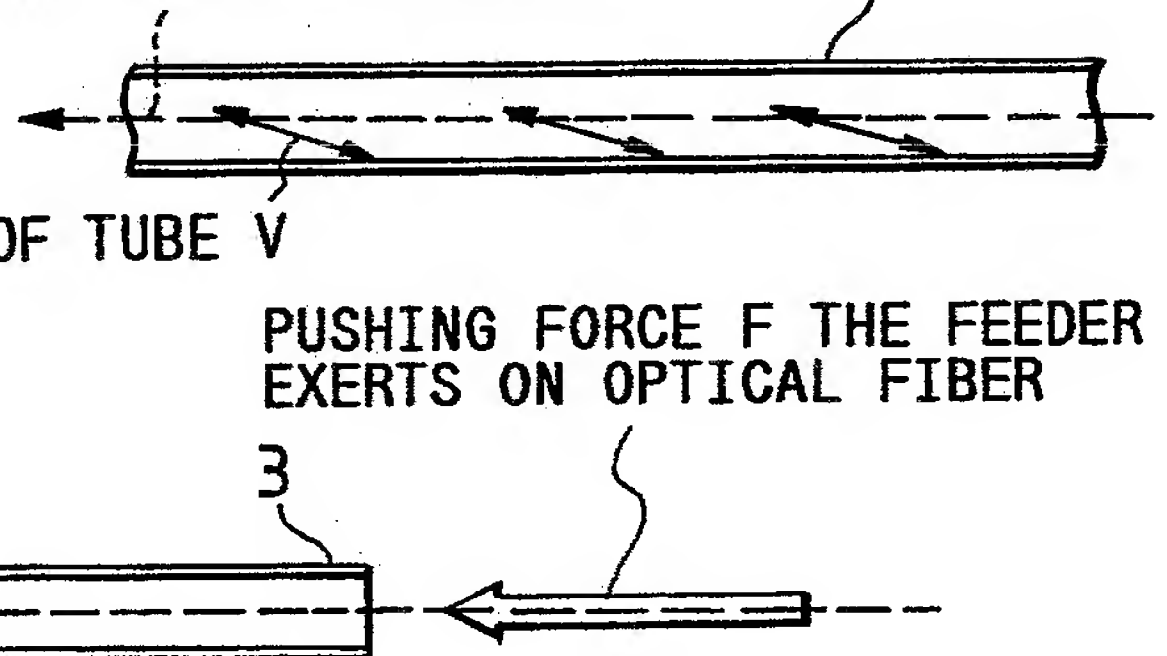




FIG. 10

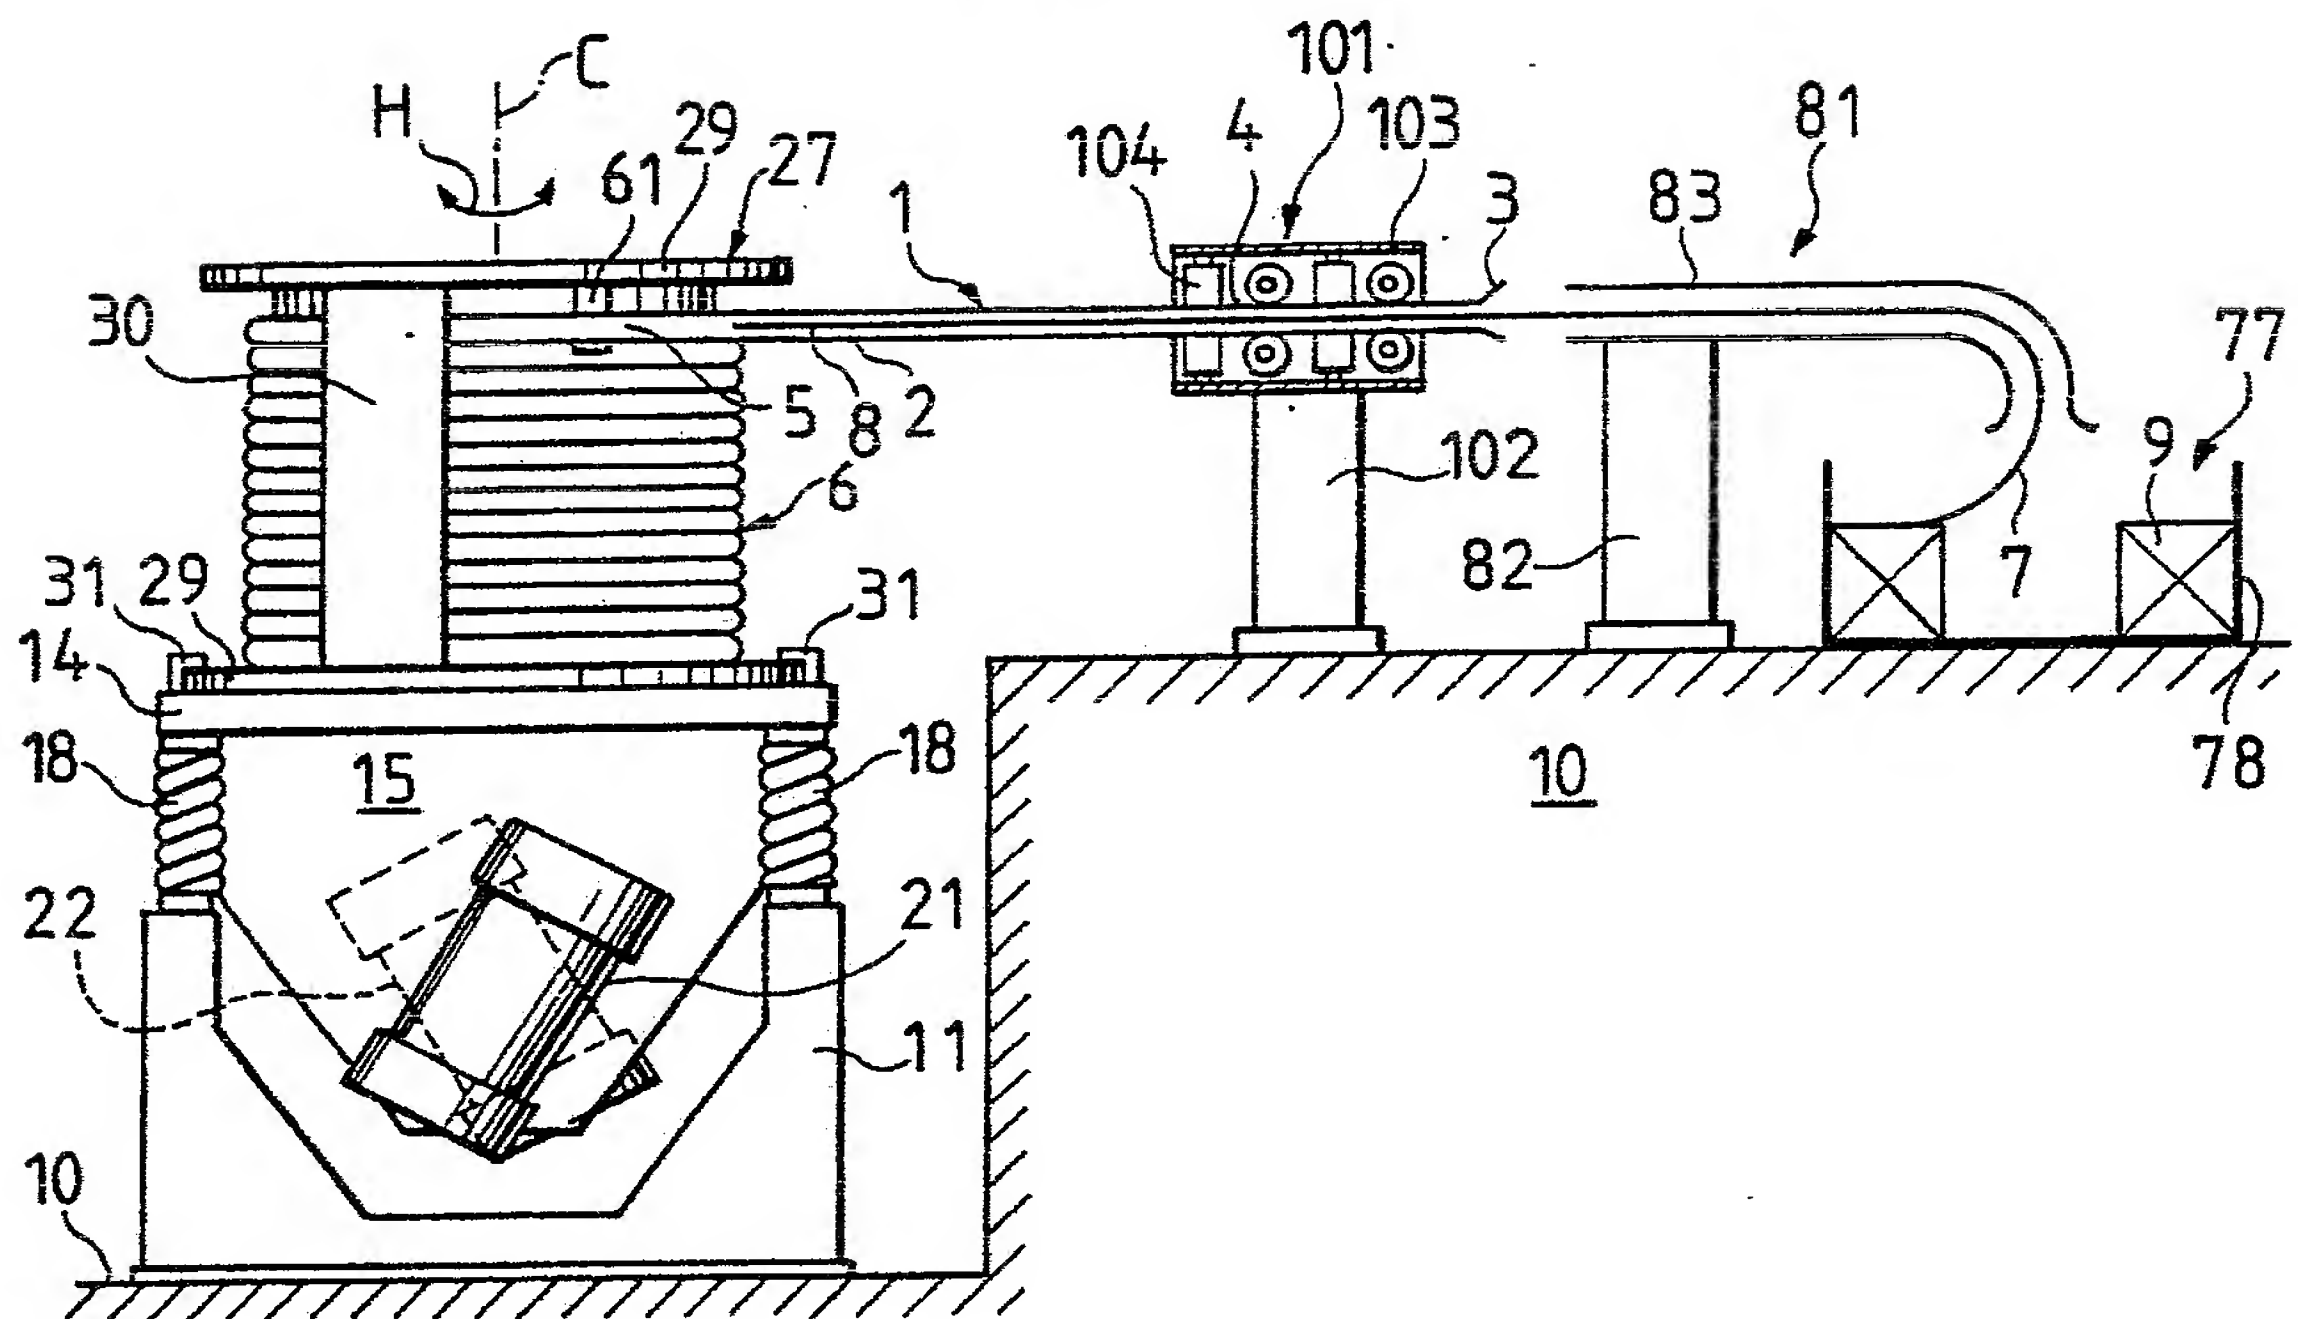


FIG. 11

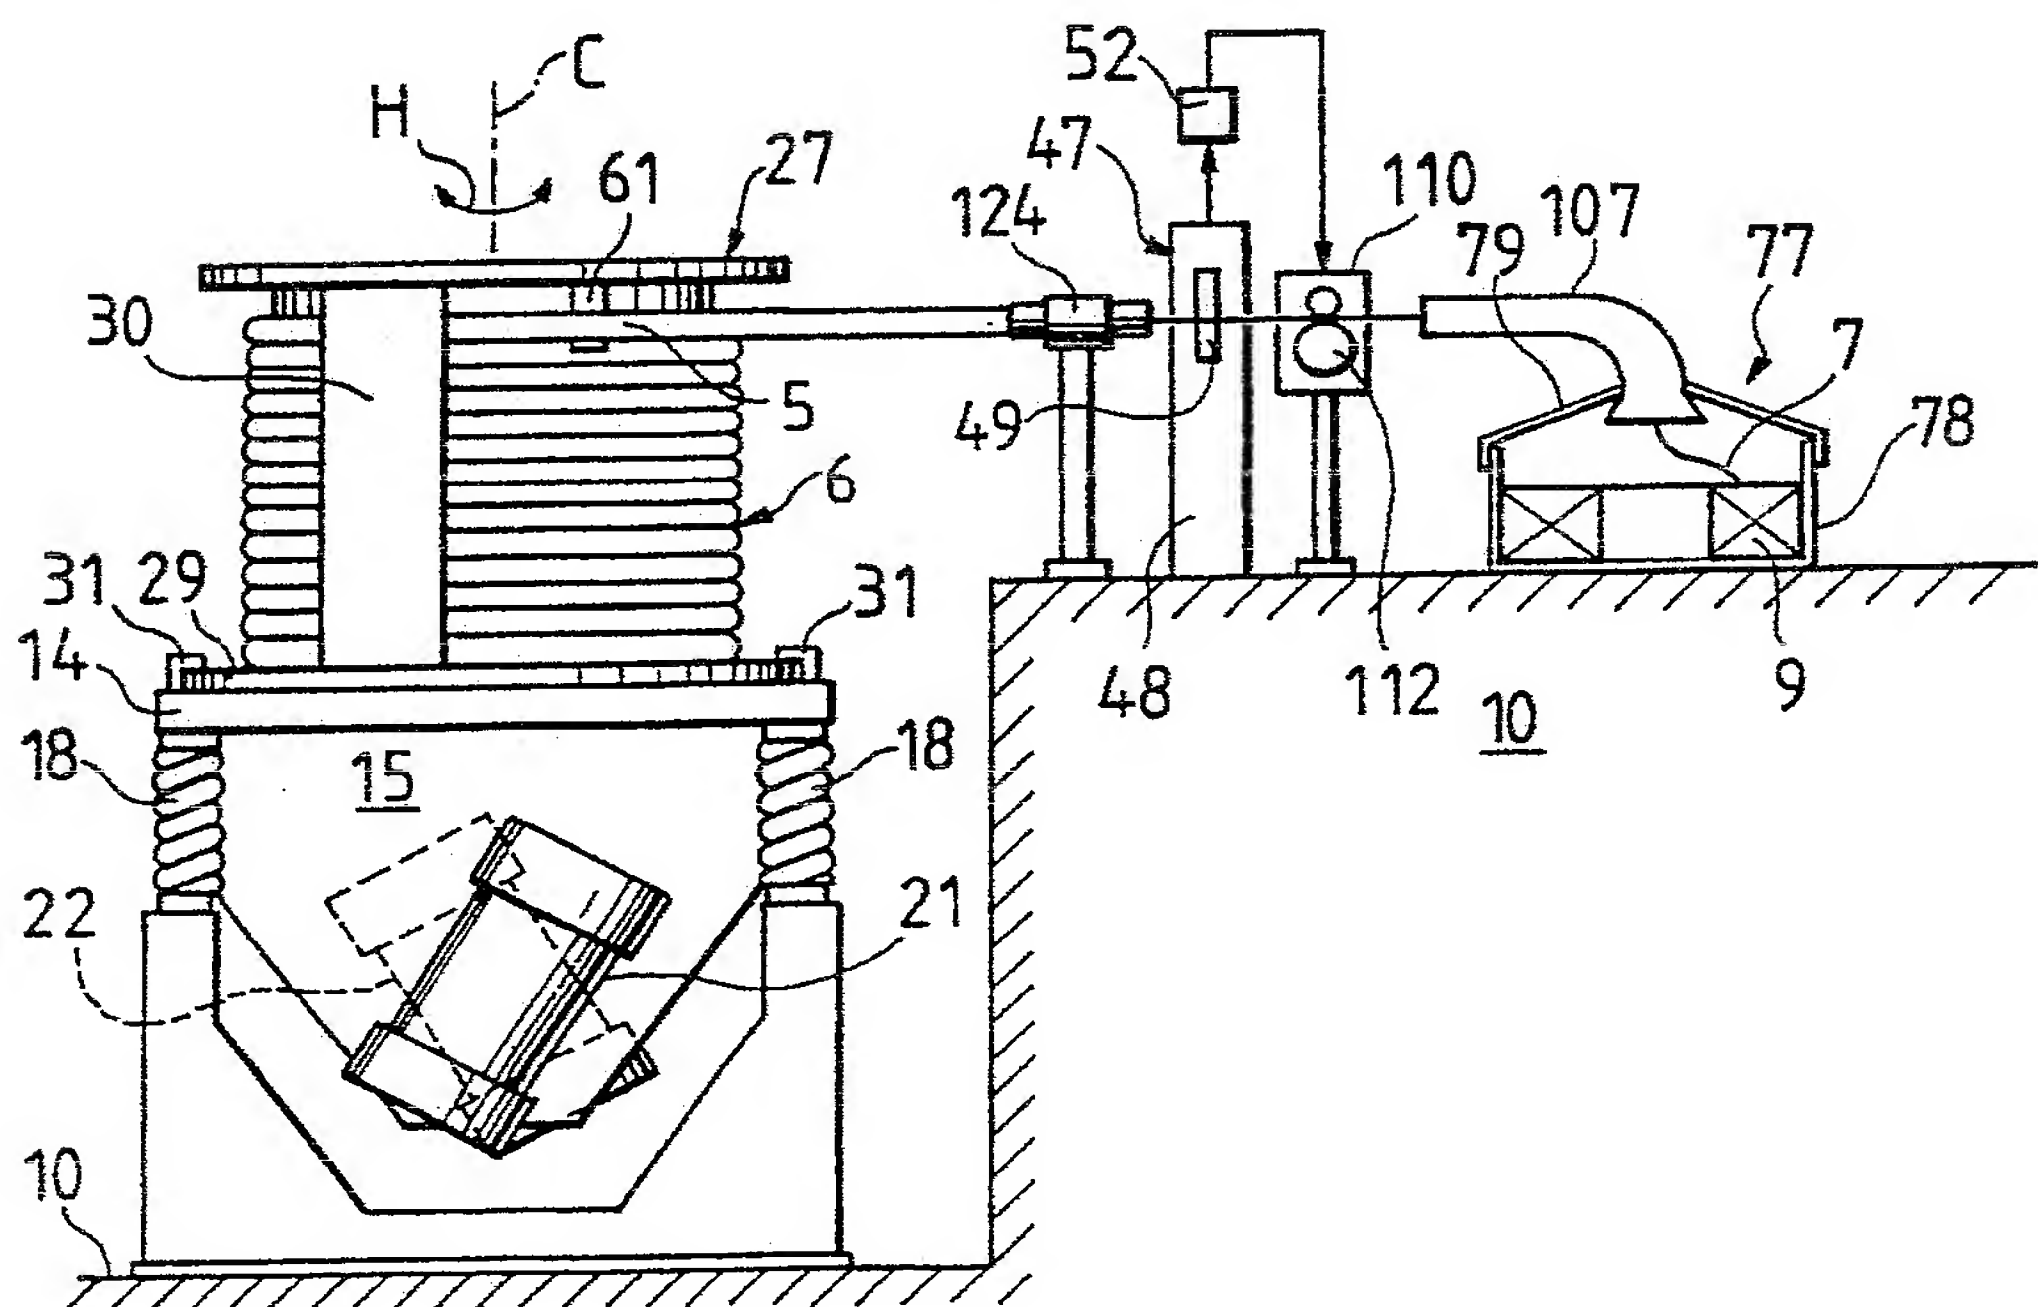


FIG. 12

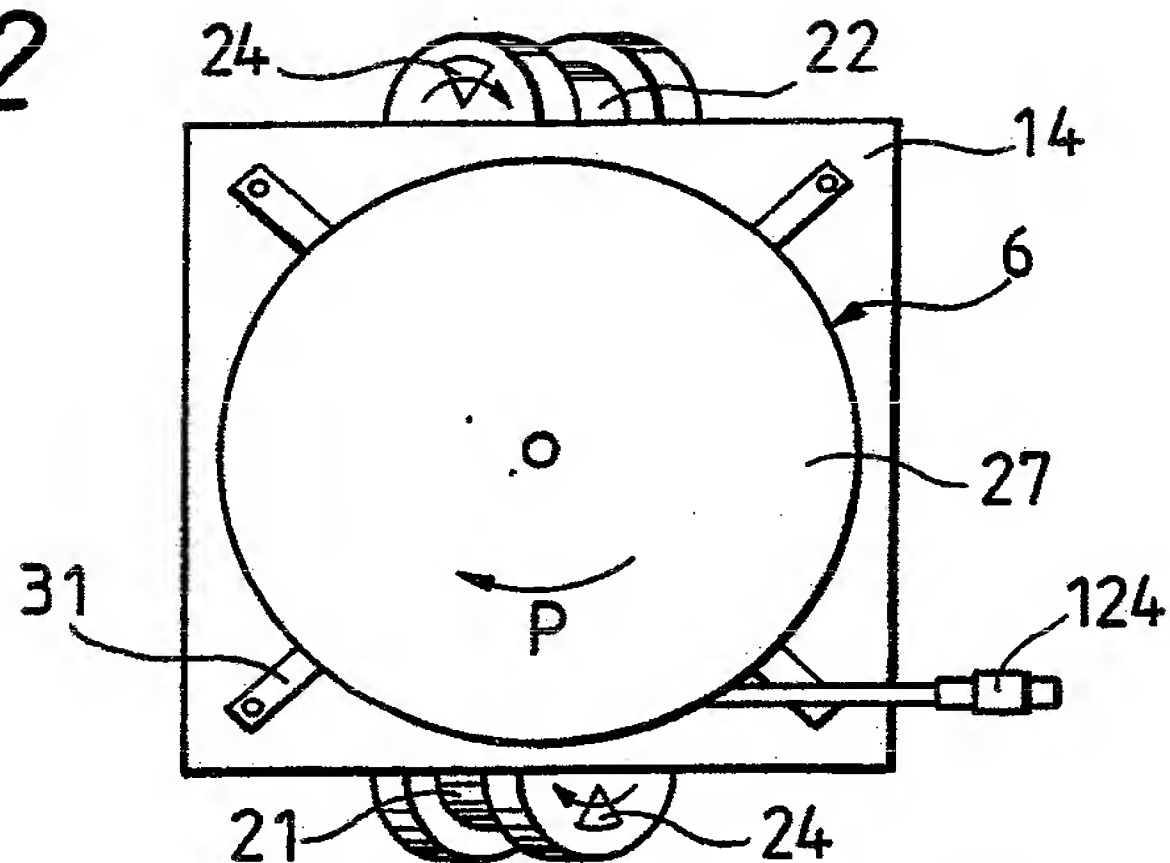


FIG. 13

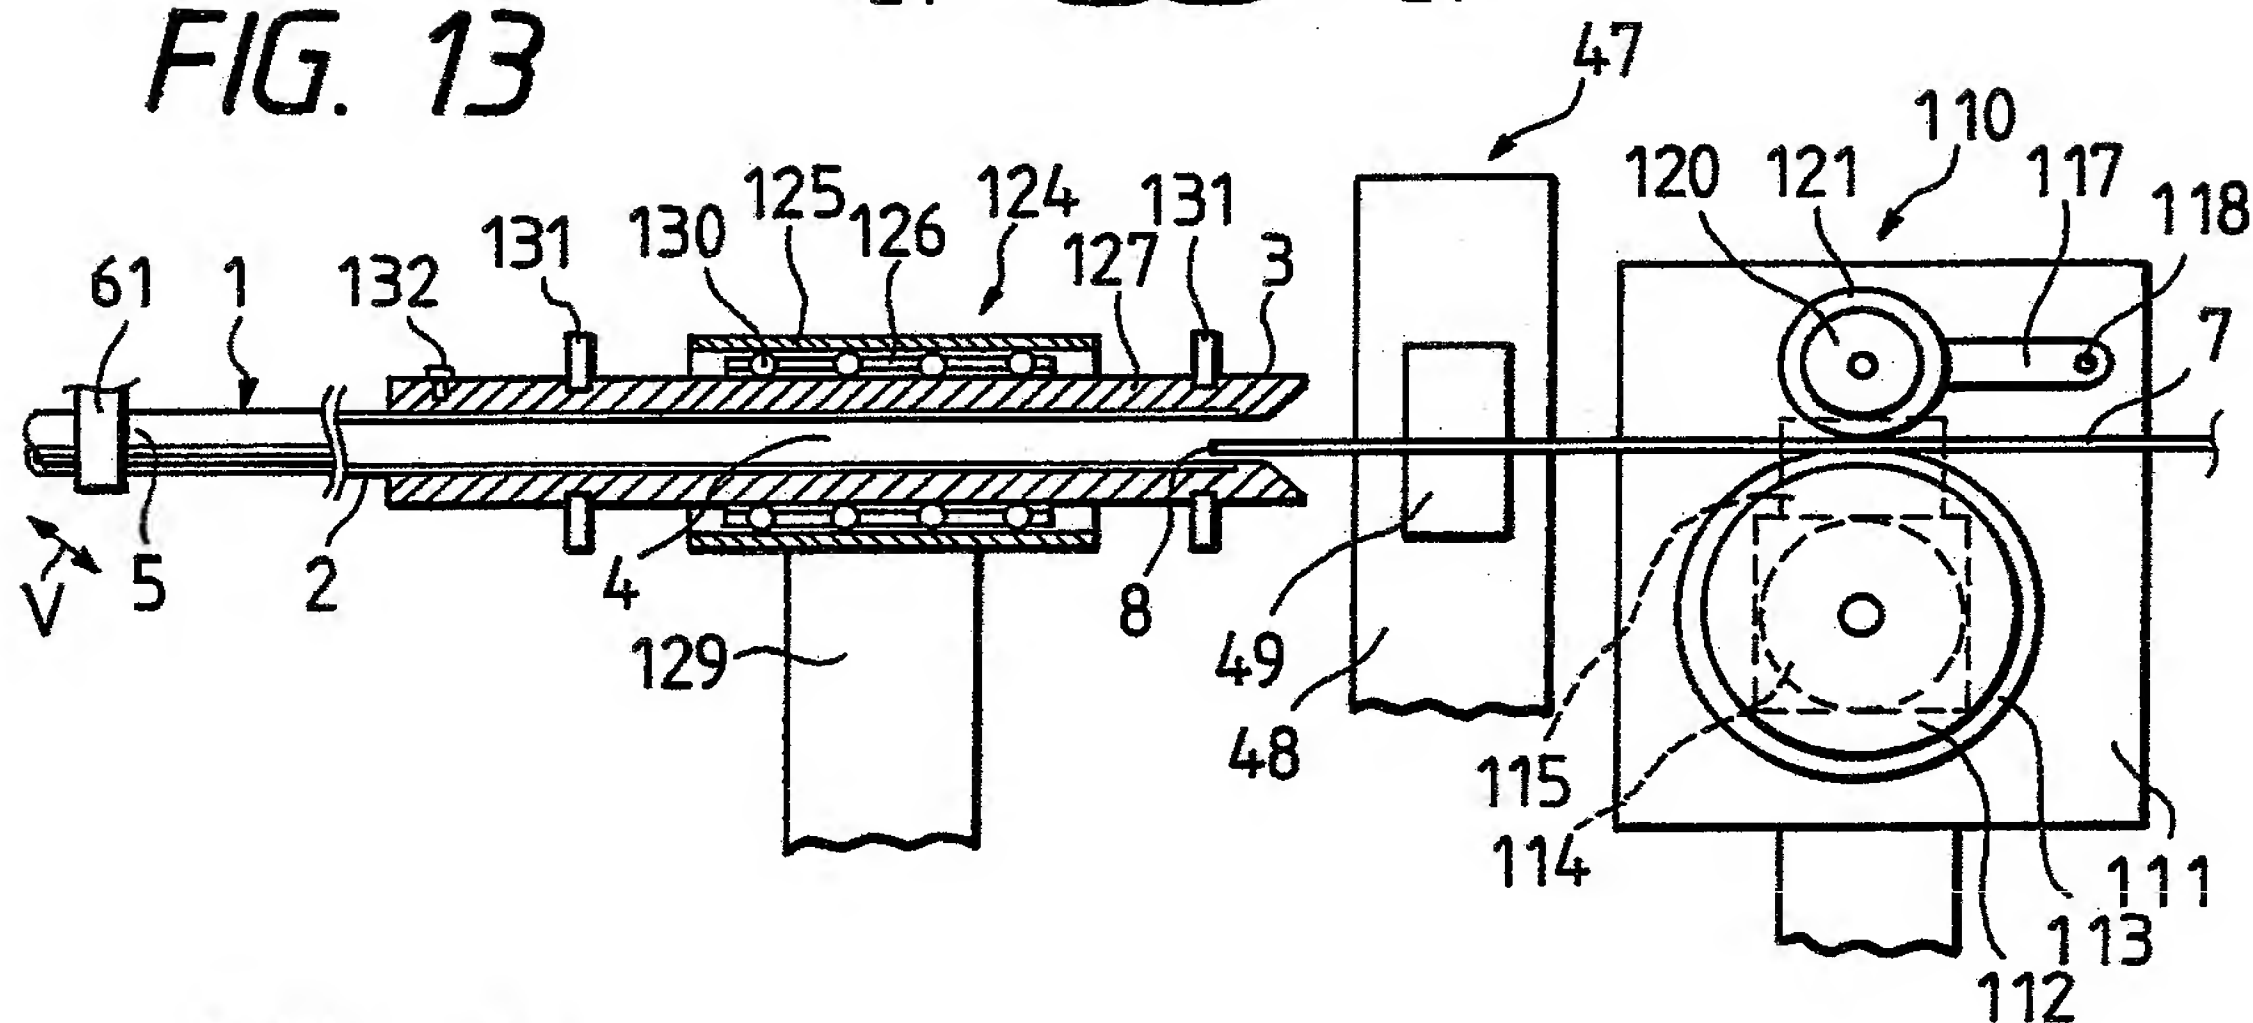


FIG. 14

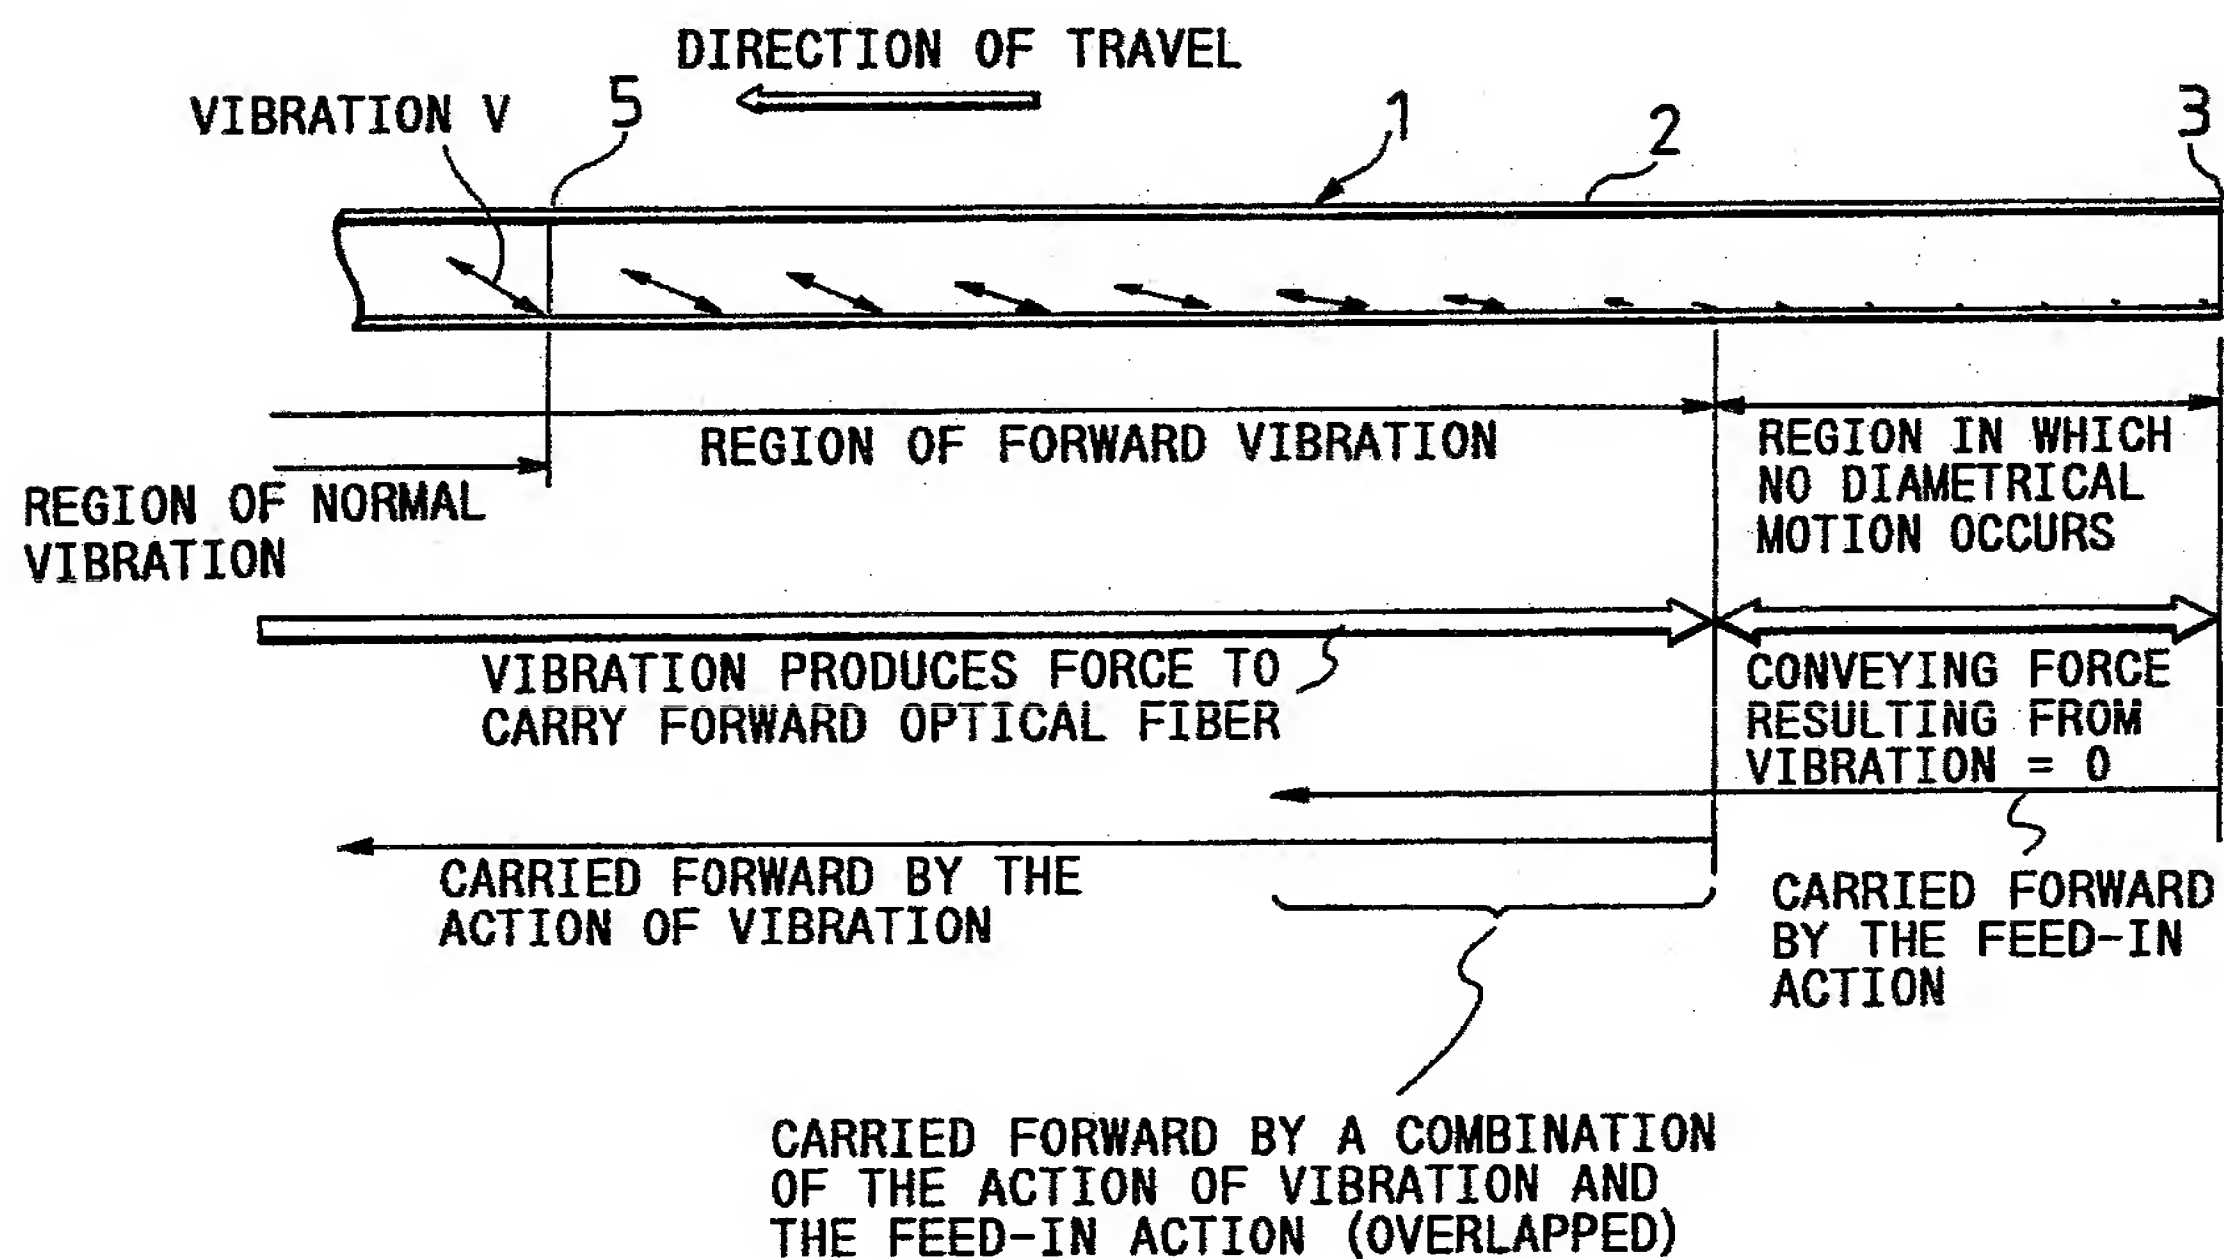




FIG. 15

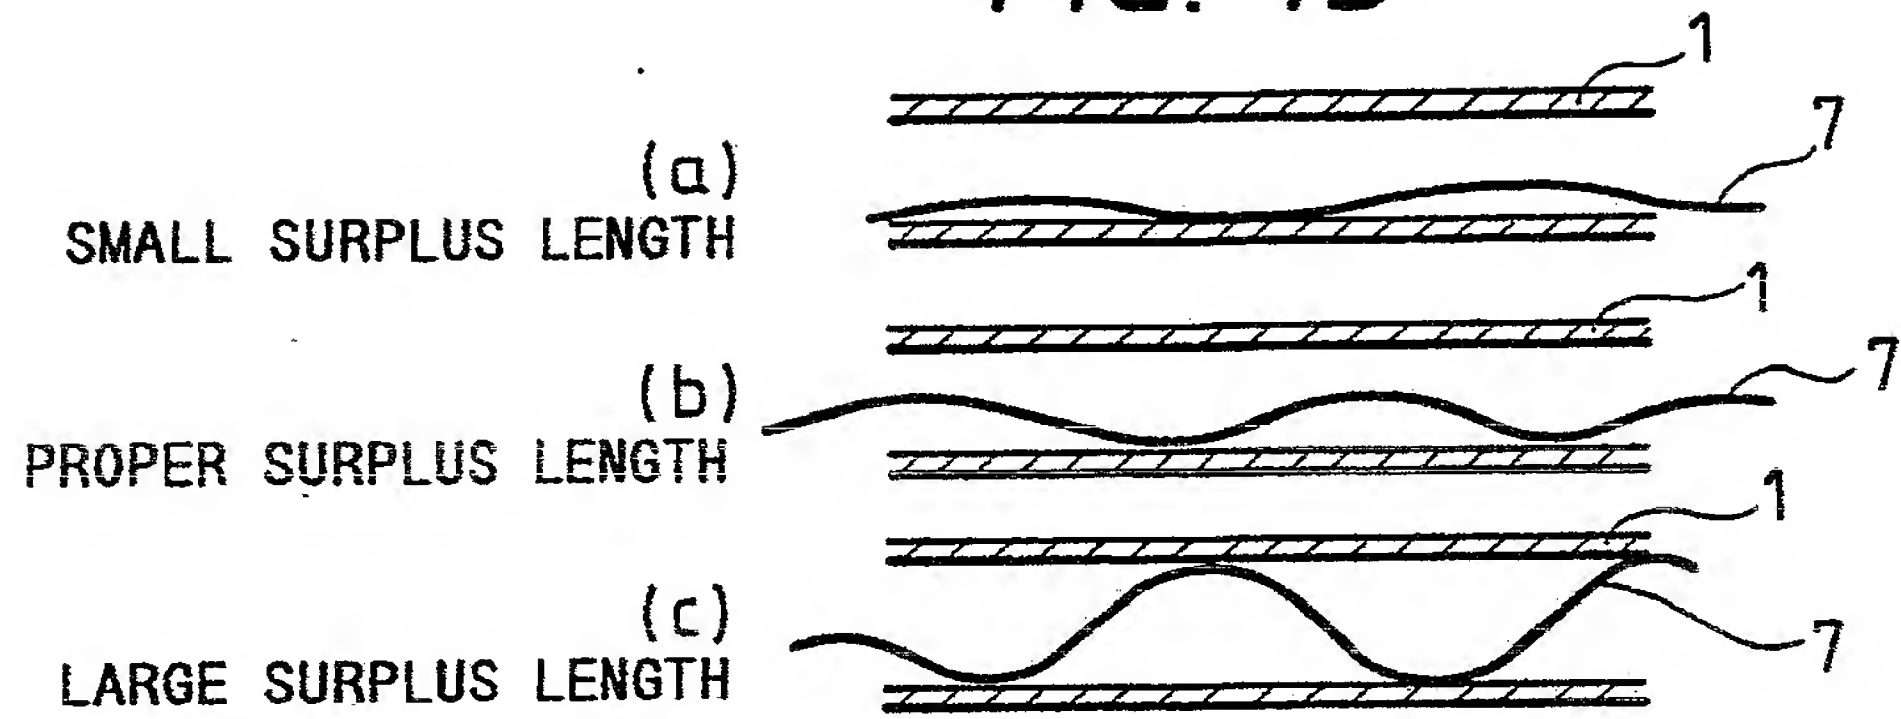


FIG. 16

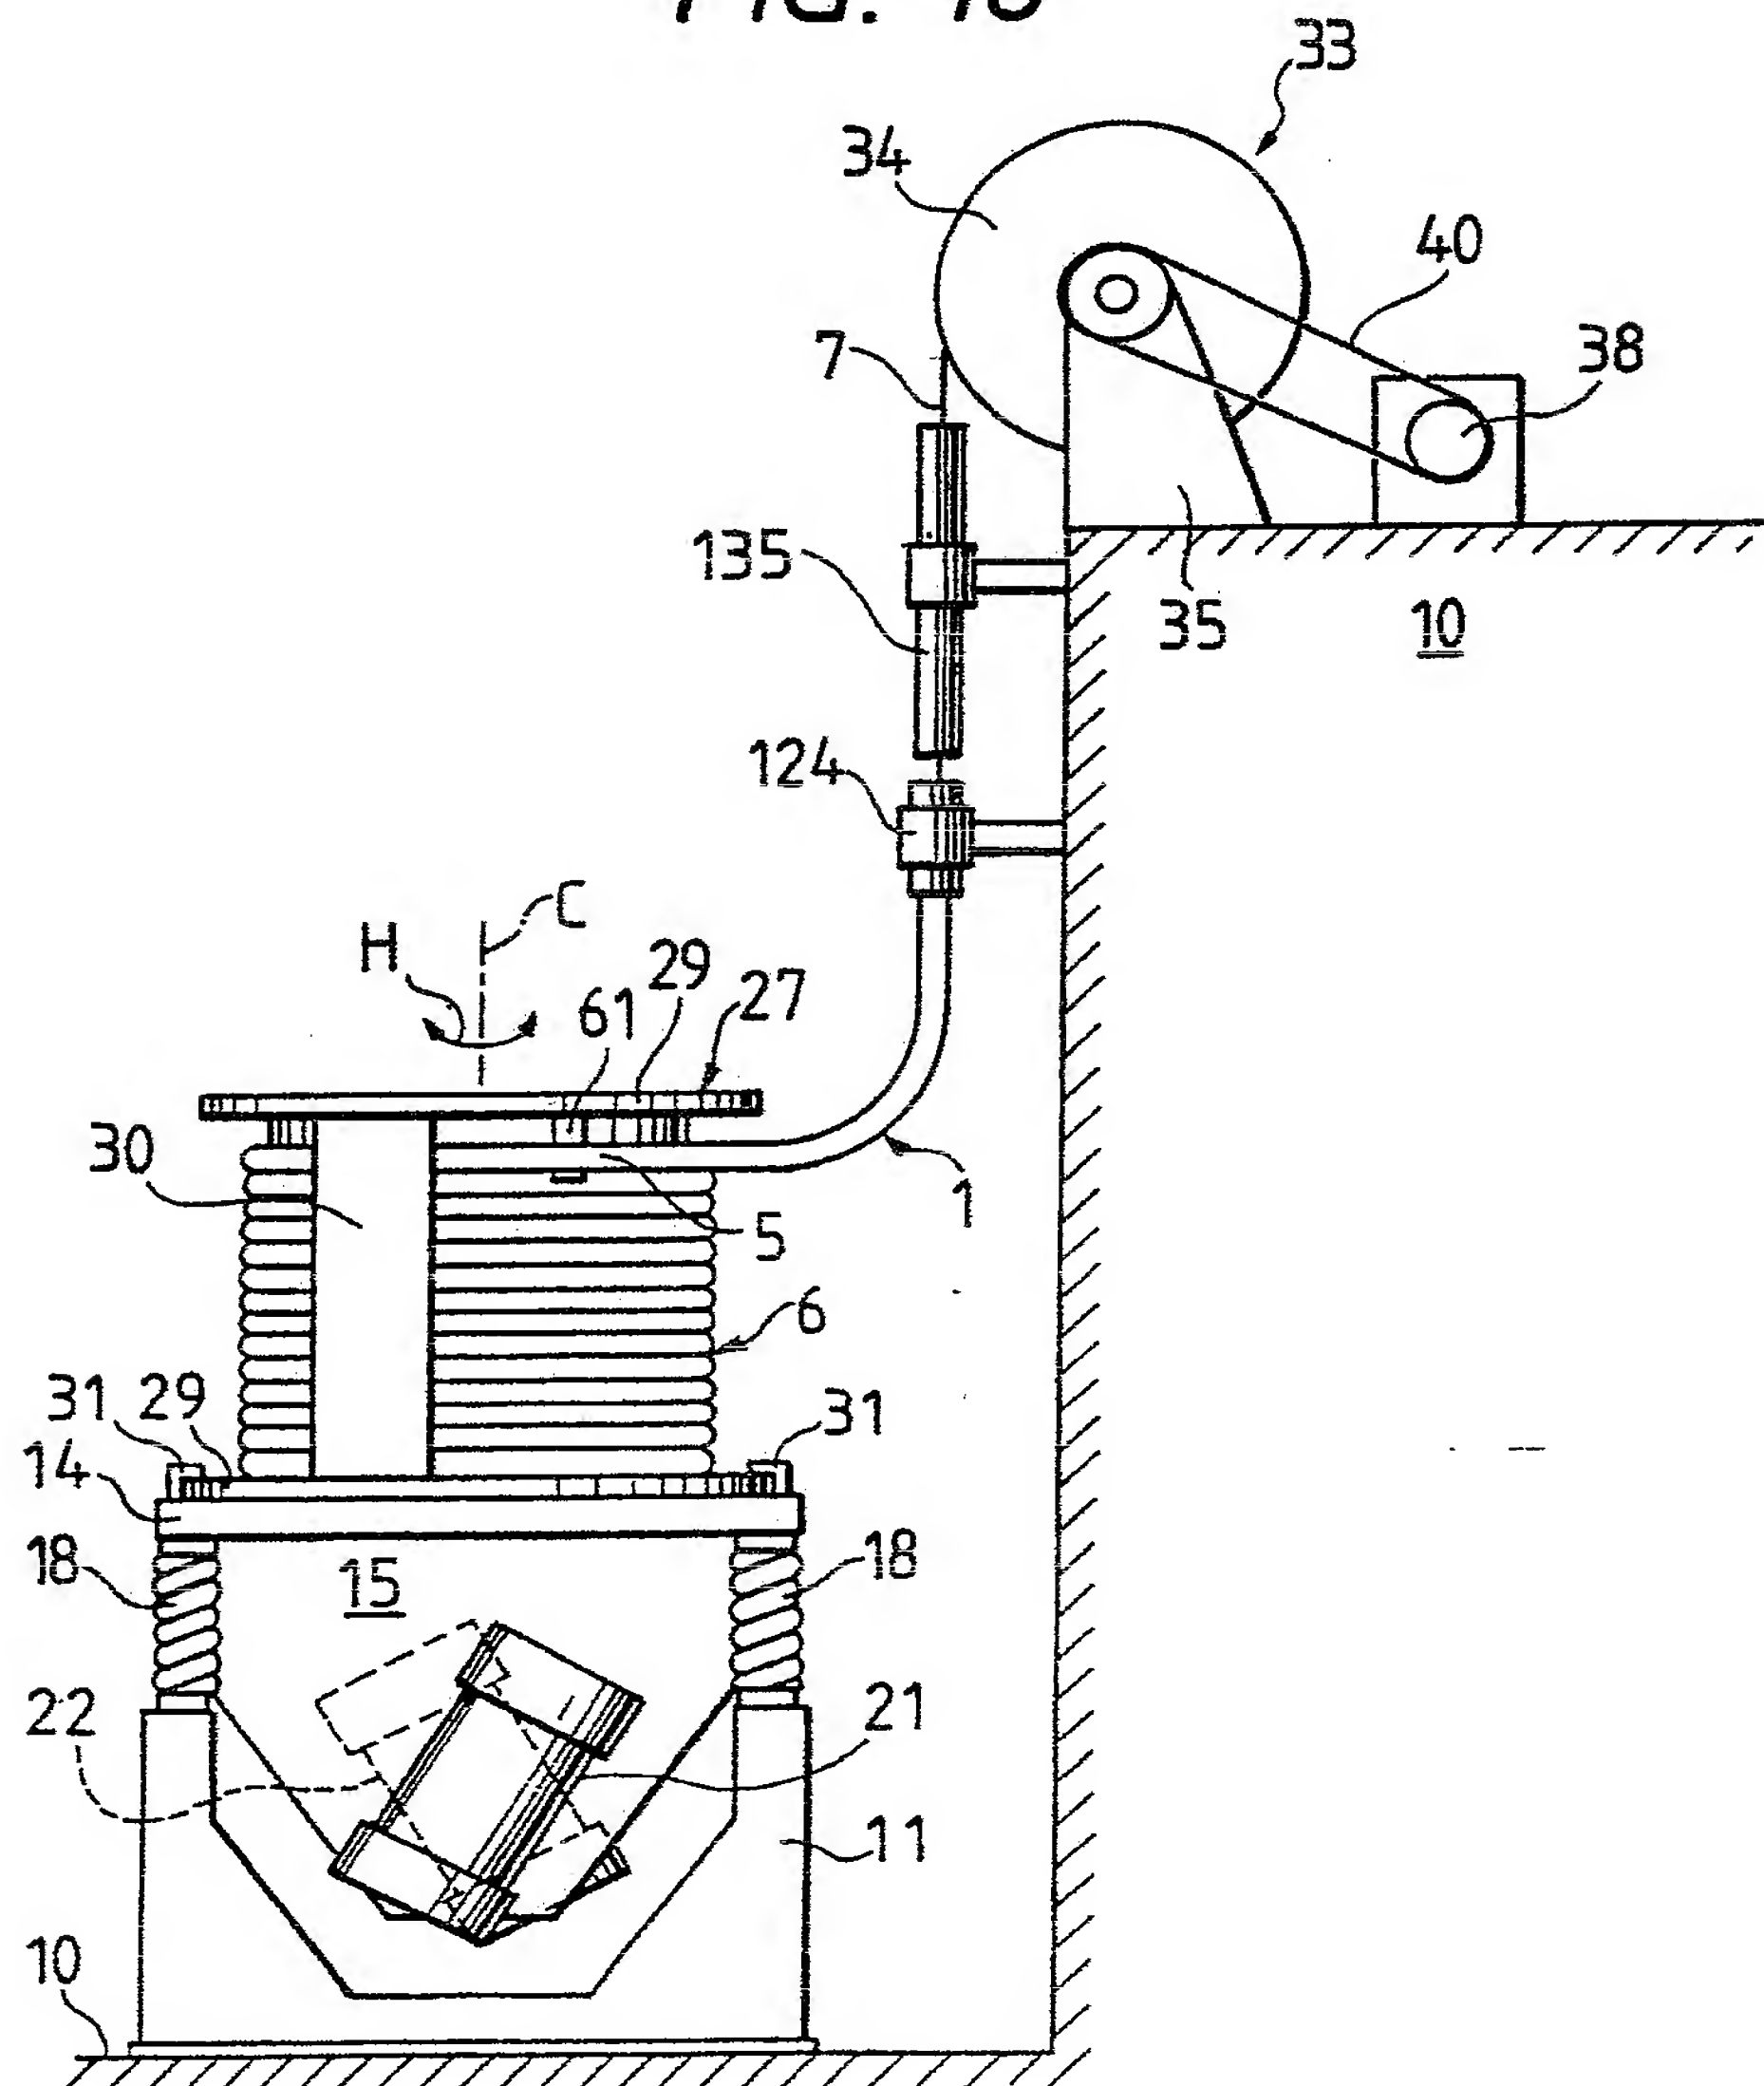


FIG. 17

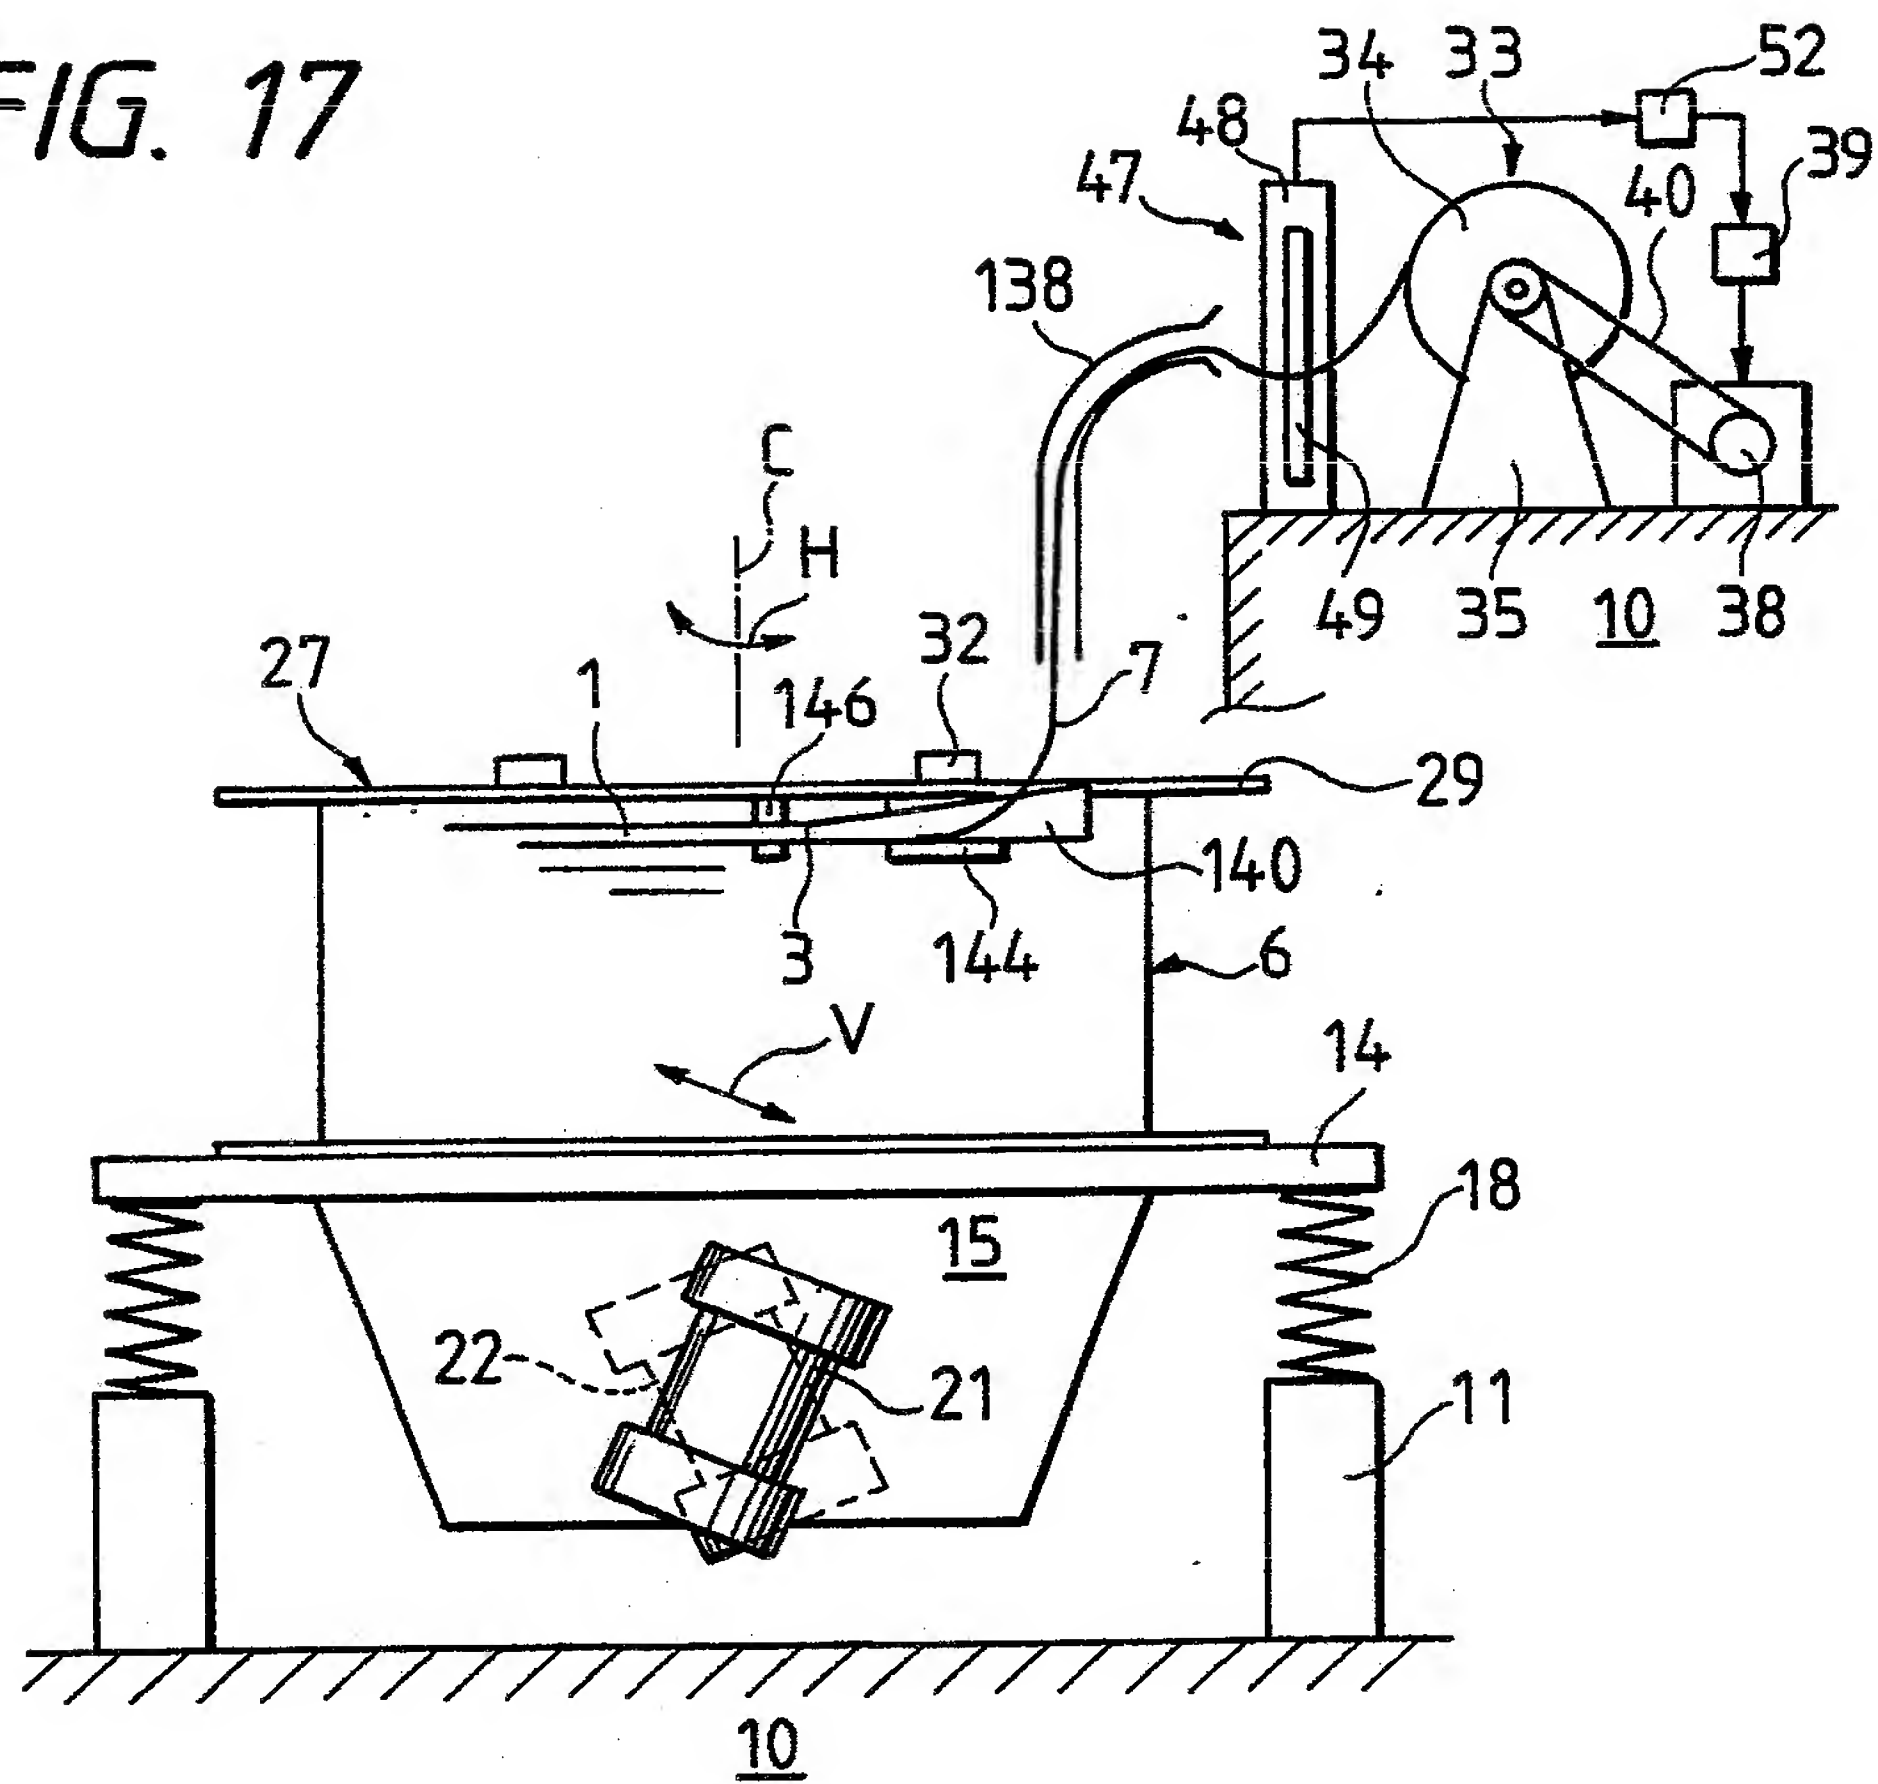


FIG. 18

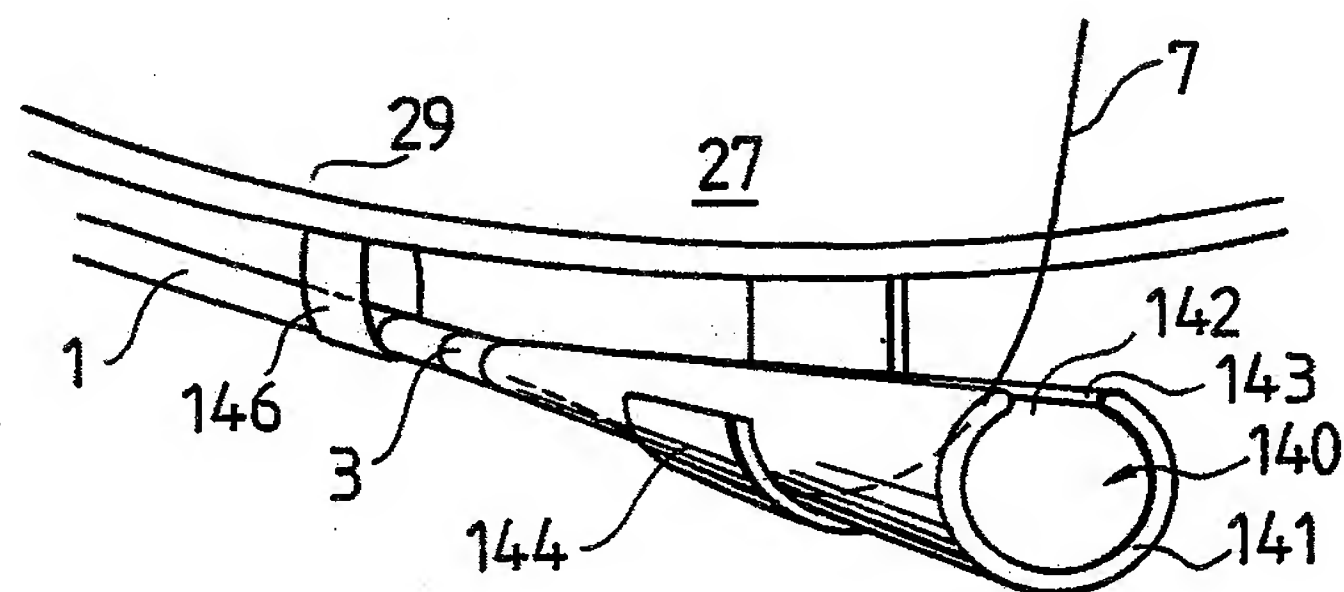


FIG. 19

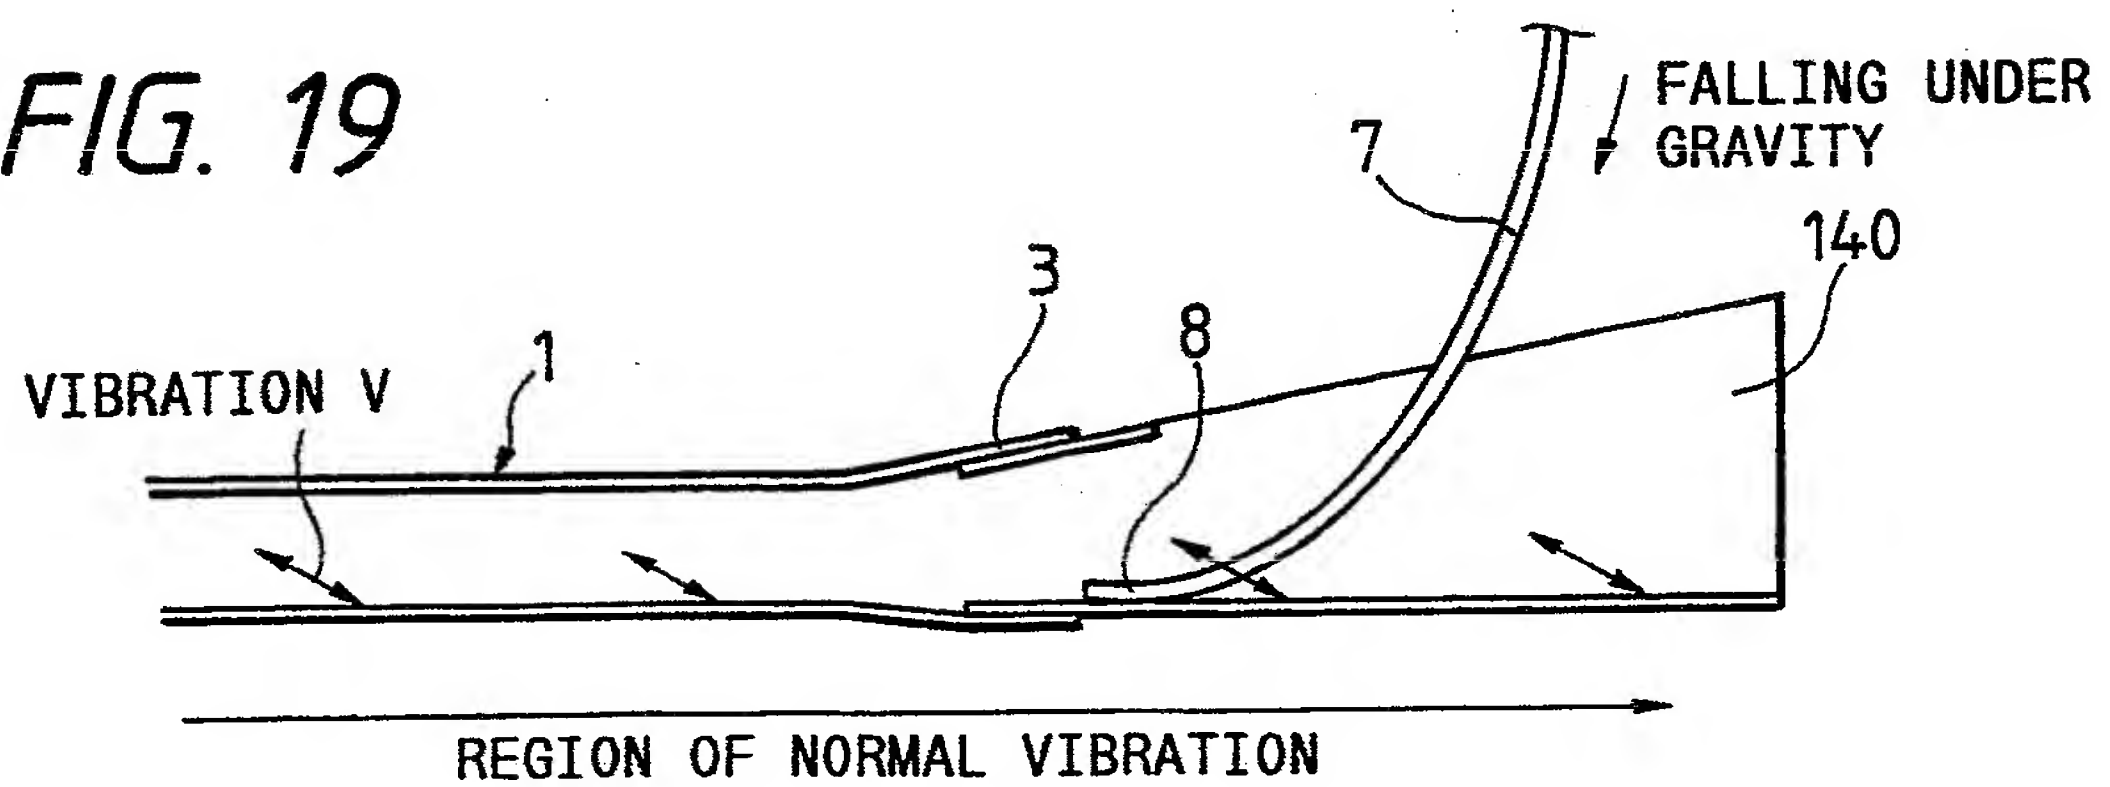




FIG. 20


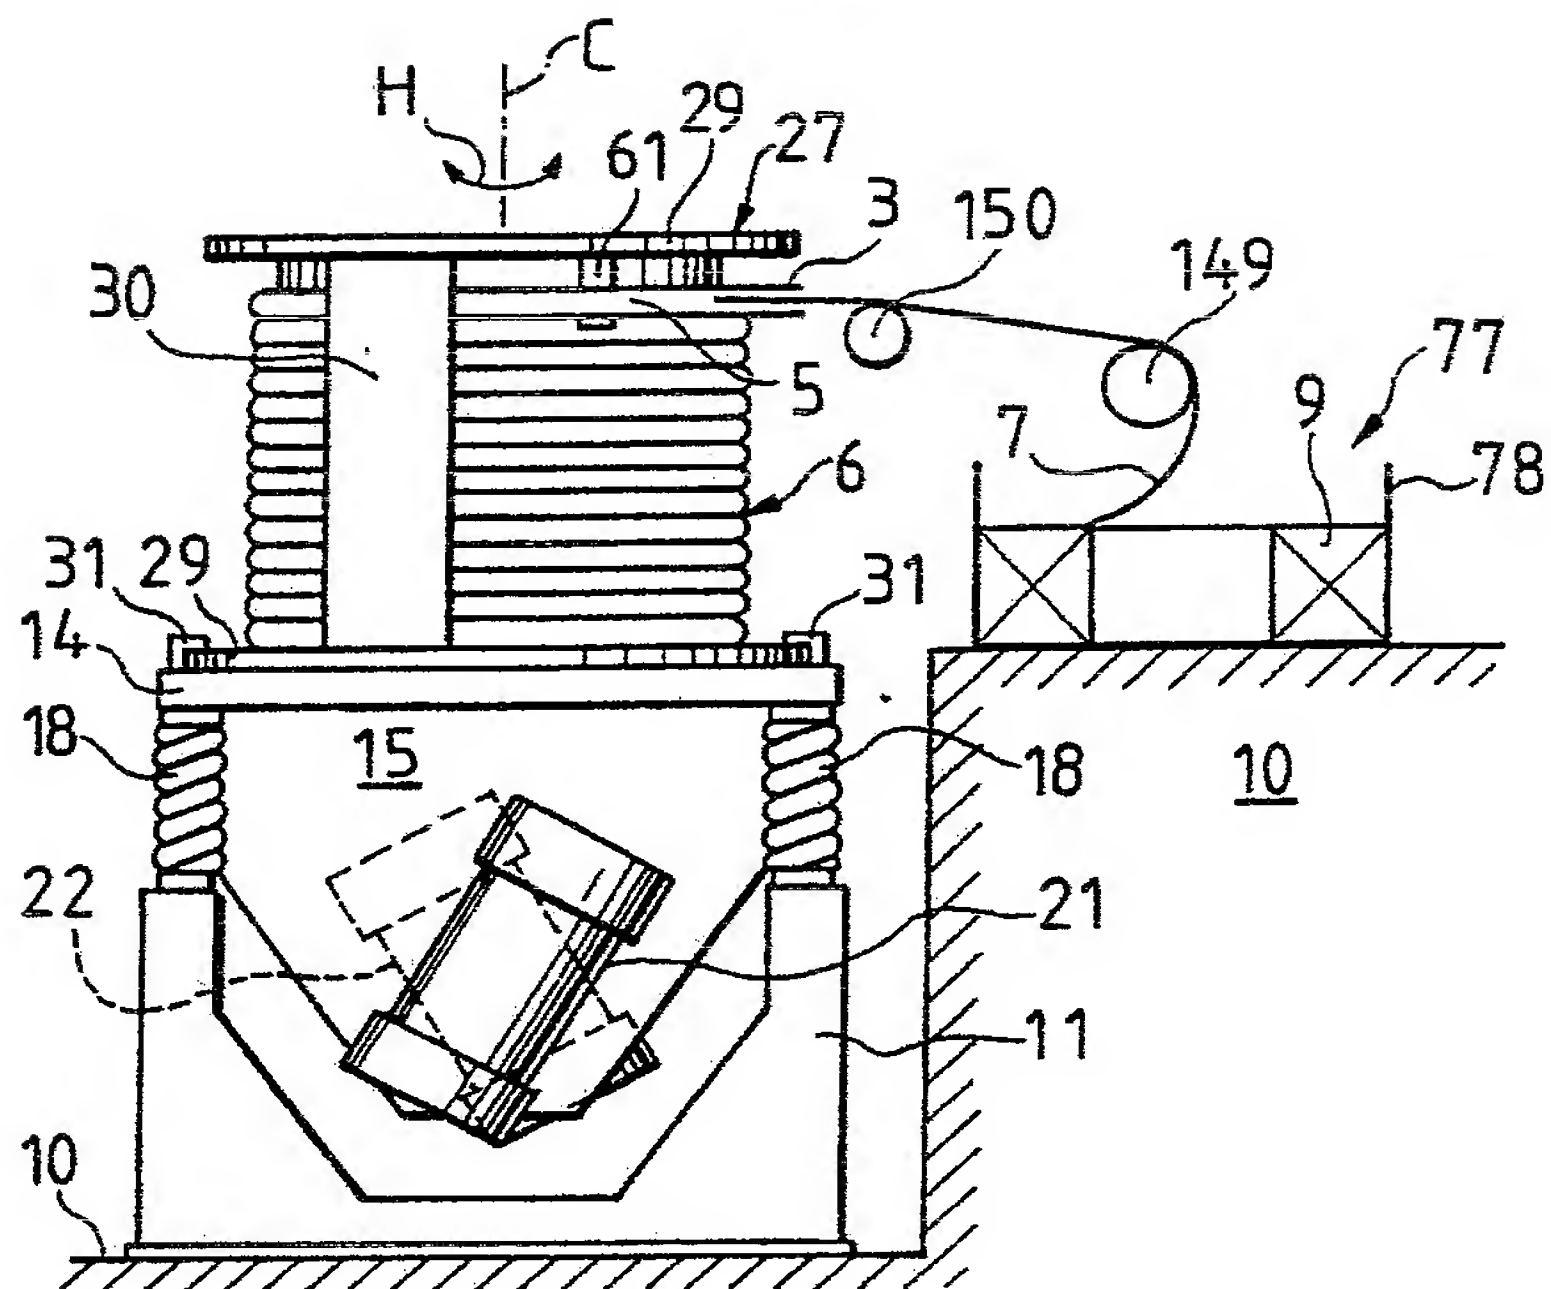


FIG. 21



**FIG. 22**

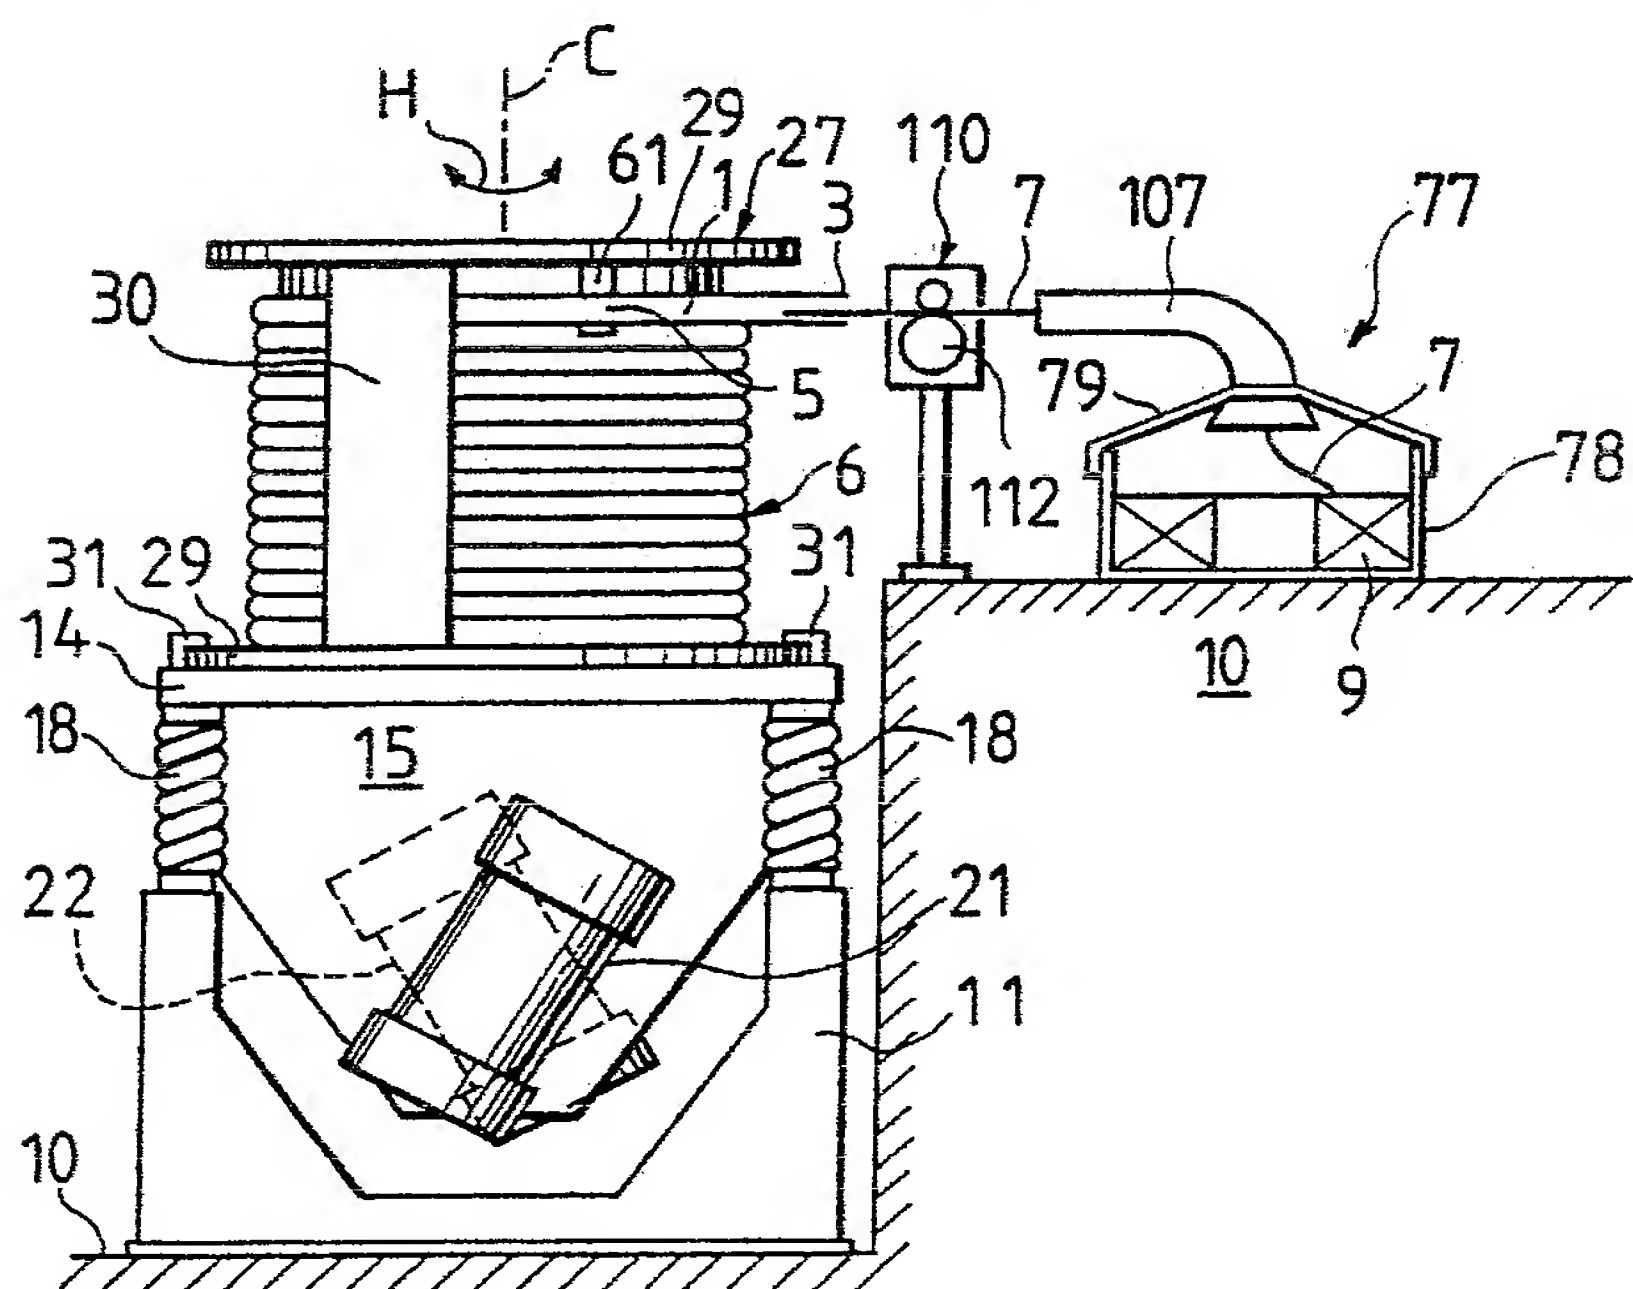